

ADDENDUM No. 3

August 16, 2024

Project: 2023111
Addition at Career and Technical Center
Itawamba County School District
(Fulton, Mississippi)

The following additions, changes, clarifications, and substitutions to the drawings and specifications, dated June 28, 2024, are to be included as part of the contract documents. Acknowledge receipt of this addendum by inserting its number and date in the proposal form.

Addendum Table of Contents:	03	8-1/2 x 11 pages of Addendum Items
	08	8-1/2 x 11 pages of Specifications
	00	8-1/2 x 11 pages of Drawings
	17	24 x 36 pages of Drawings

Total of **28** pages of Addendum


Michael W. Taylor, AIA
PryorMorrow PC



Columbus, MS

Michael W. Taylor, AIA : Corey D. Ravenhorst, PE
P.O. Box 167 : 102 Rosecrest Dr. : Columbus, MS 39703 : P 662 327 8990 : F 662 327 8991

Tupelo, MS

William V. Dexter, Jr., AIA
P.O. Box 7066 : 431 West Main Street, Suite 300 : Tupelo, MS 38802 : P 662 840 8062 : F 662 840 8092

Brandon, MS

J Guadalupe Arellano, AIA
2151 Highway 18 : Brandon, MS 39042 : P 601 829 6915 : F 601 829 6916

Reform, AL

Michael W. Taylor, AIA
P.O. Box 83 : 418 First Avenue West : Reform, AL 35481 : P 205 828 0039



Refer to Addendum No. 2

- Item No. 1. Refer to Addendum No. 2; Item No. 5; Sheet A1.1. Omit the sheet in its entirety and replace it with attached supplemental drawing M2.1. The plasma cutter exhaust fan and associated materials has been omitted from the scope of work.
- Item No. 2. Refer to Addendum No. 2; Item No. 6; Sheet A1.2. Omit the sheet in its entirety and replace it with attached supplemental drawing M2.1. The plasma cutter exhaust fan and associated materials has been omitted from the scope of work.
- Item No. 3. Refer to Addendum No. 2; Item No. 8; Sheet A1.4. Omit the sheet in its entirety and replace it with attached supplemental drawing M2.1. The plasma cutter exhaust fan and associated materials has been omitted from the scope of work.
- Item No. 4. Refer to Addendum No. 2; Item No. 11; Sheet A6.2. Omit sheet in its entirety and replace with attached supplemental drawing Sheet A6.2. Modifications are shown with revision clouds.

Refer to Specifications

- Item No. 5. Refer to Section 13 34 19 – Metal Building Systems. Omit section in its entirety and replace it with attached supplemental specification Section 13 34 19 – Metal Building Systems.

Refer to Drawings

- Item No. 6. Refer to Sheet C100. Omit the sheet in its entirety and replace it with attached supplemental drawing C100. Modifications are shown with revision clouds.
- Item No. 7. Refer to Sheet C101. Omit the sheet in its entirety and replace it with attached supplemental drawing C101. Modifications are shown with revision clouds.
- Item No. 8. Refer to Sheet C102. Omit the sheet in its entirety and replace it with attached supplemental drawing C102. Modifications are shown with revision clouds.
- Item No. 9. Refer to Sheet M2.1. Omit the sheet in its entirety and replace it with attached supplemental drawing M2.1. Modifications are shown with revision clouds.
- Item No. 10. Refer to Sheet P2.1. Omit the sheet in its entirety and replace it with attached supplemental drawing P2.1. Modifications are shown with revision clouds.



Columbus, MS

Michael W. Taylor, AIA : Corey D. Ravenhorst, PE
P.O. Box 167 : 102 Rosecrest Dr. : Columbus, MS 39703 : P 662 327 8990 : F 662 327 8991

Tupelo, MS

William V. Dexter, Jr., AIA
P.O. Box 7066 : 431 West Main Street, Suite 300 : Tupelo, MS 38802 : P 662 840 8062 : F 662 840 8092

Brandon, MS

J Guadalupe Arellano, AIA
2151 Highway 18 : Brandon, MS 39042 : P 601 829 6915 : F 601 829 6916

Reform, AL

Michael W. Taylor, AIA
P.O. Box 83 : 418 First Avenue West : Reform, AL 35481 : P 205 828 0039

- Item No. 11. Refer to Sheet FP2.1. Omit the sheet in its entirety and replace it with attached supplemental drawing FP2.1. Modifications are shown with revision clouds
- Item No. 12. Refer to Sheet E2.1. Omit the sheet in its entirety and replace it with attached supplemental drawing E2.1. Modifications are shown with revision clouds.
- Item No. 13. Refer to Sheet E3.1. Omit the sheet in its entirety and replace it with attached supplemental drawing E3.1. Modifications are shown with revision clouds.
- Item No. 14. Refer to Sheet E4.1. Omit the sheet in its entirety and replace it with attached supplemental drawing E4.1. Modifications are shown with revision clouds.
- Item No. 15. Refer to Sheet E5.1. Omit the sheet in its entirety and replace it with attached supplemental drawing E5.1. Modifications are shown with revision clouds.
- Item No. 16. Refer to Sheet E6.1. Omit the sheet in its entirety and replace it with attached supplemental drawing E6.1. Modifications are shown with revision clouds.
- Item No. 17. Refer to Sheet E6.2. Omit the sheet in its entirety and replace it with attached supplemental drawing E6.2. Modifications are shown with revision clouds.
- Item No. 18. Refer to Sheet E7.1. Omit the sheet in its entirety and replace it with attached supplemental drawing E7.1. Modifications are shown with revision clouds.

End of Addendum No. Three



Columbus, MS

Michael W. Taylor, AIA : Corey D. Ravenhorst, PE
P.O. Box 167 : 102 Rosecrest Dr. : Columbus, MS 39703 : P 662 327 8990 : F 662 327 8991

Tupelo, MS

William V. Dexter, Jr., AIA
P.O. Box 7066 : 431 West Main Street, Suite 300 : Tupelo, MS 38802 : P 662 840 8062 : F 662 840 8092

Brandon, MS

J Guadalupe Arellano, AIA
2151 Highway 18 : Brandon, MS 39042 : P 601 829 6915 : F 601 829 6916

Reform, AL

Michael W. Taylor, AIA
P.O. Box 83 : 418 First Avenue West : Reform, AL 35481 : P 205 828 0039

SECTION 13 34 19
METAL BUILDING SYSTEMS

PART 1 - GENERAL

1.01 WORK INCLUDED

- A. Furnish all labor, materials, and engineering services required to complete the roof, framing system, including anchor bolts, columns, beams, girts, bracing, mounting accessories, roof insulation, wall panels, metal trim, downspouts, gutters, insulation, and other components required for a complete job.
- B. General Metal Building Descriptions:

BUILDING	LENGTH	SPAN	DESCRIPTION	EAVE HEIGHT
Career & Technical Addition	136'-0"	115'-0"	Straight columns on exterior (maximum depth 20")	16'-0"

- C.
- D. Anchor bolts, an anchor bolt setting plan, and anchor bolt templates shall be provided by the metal building system contractor. Anchor bolts shall be of sufficient length to extend to bottom of mat of reinforcing steel.
- E. Metal building manufacturers are cautioned that these are masonry buildings. The design shall limit drift at 10'-0" AFF to H/360, but in no case shall drift at 10'-0" AFF exceed 3/8". There will be no exceptions to this arrangement.
- F. Metal building supplier shall design structural system with close attention to the detailing of the architectural drawings. Columns typically fall within CMU enclosures; therefore, columns shall be sized to fall within enclosure dimensions where possible.

1.02 CODES AND STANDARDS

- A. The metal building shall meet or exceed the live load and wind load requirements of the 2018 International Building Code.
- B. Metal Building Design Loads:
- Dead Load: Self.
 - Roof Live Load: 20 psf.
 - Collateral Load: 5 psf.
 - Wind Load: 115 mph (ultimate), Exposure category "C"
 - Provide additional framing and structural support for concentrated loads such as hoods at kitchens and mechanical units.

- C. The stamp of a registered engineer licensed in the State of Mississippi is required on all fabrication/erection drawings.
- D. Structural systems shall be designed to conform to the engineering standards of the American Institute of Steel Construction and the American Iron and Steel Industries. Manufacturer to be AISC-certified Category MB.

1.03 WARRANTIES

- A. Weathertightness: A manufacturer's representative shall inspect the installation of the roofing system and, upon approval, shall furnish a 20-year, no dollar limit (NDL) roofing system warranty for weathertightness. This warranty is to provide up to one (1) full replacement of the roof, including material and labor. The warranty shall include all roofing components consisting of, but not limited to, roof panels, anchoring devices, metal flashing, gutters, roof penetration flashing, roof curbs, plumbing vent flashing, and all other roof items furnished by or approved by the metal roof manufacturer.
- B. Twenty-year wall paint warranty as follows:
 - 1. Will not chalk (gradual erosion of film) in excess of ASTM-D-659 Number 8 rating for a period of twenty (20) years from date of shipment as determined by procedures outlined in ASTM-D-659 Specification.
 - 2. Will not fade (color change of file) in excess of 5NBS units when measured in accordance with the standard procedure specified in ASTM-D-2244-94 for a period of twenty (20) years.
 - 3. Will not noticeably crack, check-blister, or peel for a period of twenty (20) years.
- C. The Contractor shall provide a written guarantee agreeing to maintain the roof free of leaks for a period of two (2) years starting at the time of acceptance of the project by the Owner.
- D. All warranties shall be in the name of the Contractual "Owner" as listed in the Owner-Contractor Agreement for this project. The Contractor (General or Sub) shall not be listed as the "Owner" on any warranties.

1.04 DRAWINGS AND CALCULATIONS

- A. Contractor shall provide erection information and drawings as required to describe and define system. Drawings shall include anchor bolt setting plan and piece marks or all major parts for easy field identification.
- B. Submit letter of design certification for the structural framing and covering panels of the metal building system. Letter of certification is to be signed and sealed by a registered professional engineer licensed in the State of Mississippi.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. CECO (**BASIS of DESIGN**)
- B. Gulf States
- C. Inland

2.02 PRIMARY MEMBERS

- A. Members fabricated from plate, plate coils, strip mill plate, or flat bar stock shall have flanges and webs joined on one side of the web by a continuous welding process. Minimum yield strength: 50,000 psi.
- B. Members fabricated from W shapes, conforming to physical specification of ASTM A-992. Minimum yield strength: 42,000 psi.
- C. Primary frames may not exceed 20" depth.
- D. Portal frames may not exceed 16" depth.

2.03 SECONDARY MEMBERS

- A. Purlins, girts, eave struts shall be cold formed from steel which has a minimum yield strength of 55,000 psi.
- B. Purlins shall be "Z" sections.
- C. Girts shall be "Z" sections or break formed "C" sections.
- D. Eave struts shall be "C" sections.

2.04 STRUCTURAL STEEL PRIMING

- A. Clean and prepare all steel members in accordance with the latest issue of SSPC (Society for Protective Coating) guidelines, as a minimum.
- B. Prime steel members:
 - 1. Minimum one mil thickness.
 - 2. Primer shall be equal to SSPC No. 15, Type 1, red oxide.

2.05 BRACING

- A. Transverse wind/seismic forces shall be transferred to the foundation through the use of portal bracing at walls in combination with "X" bracing in the plane of the roof.

2023111
Addition at Career and Technical Center
(Itawamba County School District)

2.06 STRUCTURAL BOLTS/NUTS

- A. ASTM A-325.

2.07 ROOF PANELS (NON-INSULATED)

- A. Equal to Double-Lok® metal roof panel by CECO
- B. Thickness: 24-gauge (standing seam panels of roll-formed steel seamed on site with a mechanical seamer).
- C. Panel Coverage: 24 inches
- D. Configurations: Interlocking standing legs at side laps which are field-seamed together in to a double fold, lock joint by use of a mechanical seamer, for a full Pittsburgh roll seam. Factory-applied sealant shall be provided in the overlapping standing seam leg.
- E. Panel Attachment: Concealed fastening System with clips seamed into panel side laps. Screws for clips, self tapping, and length as required.
- F. Finish: Smooth
- G. Coating: Signature® 200
- H. Color: refer to Sheet A6.2 (Finish Legend)

2.08 WALL PANELS (NON-INSULATED)

- A. Equal to PBR wall panel by CECO
- B. Thickness: 24-gauge (roll-formed from 50,000 psi yield steel).
- C. Panel Coverage: 36 inches.
- D. Rib: 12" on center (1-1/4" deep)
- E. Panel Attachment: Exposed Fastening System. Screws for attachment, self tapping, and length as required.
- F. Finish: Smooth
- G. Coating: Signature® 200
- H. Color: refer to Sheet A6.2 (Finish Legend)

2.09 INTERIOR LINER PANELS (PERFORATED)

- A. Equal to MBCI Artisan Series.
- B. Coverage Width: 12"

2023111
Addition at Career and Technical Center
(Itawamba County School District)

- C. Perforated with 1/8" round holes on 0.324" staggered centers with approximately 13.5% open area.
- D. Panel Attachment: Concealed Fastening System
- E. Gauge: 24
- F. Finish: Smooth
- G. Coathing Signature 300 Metallic
- H. Color: refer to Sheet A6.2 (Finish Legend)
- I. Provide and install complete with all associated trim for a complete installation.
- J. All fasteners and trim shall match panel in color.
- K. Liner panel is required in ADVANCED MANUFACTURING LABORATORY 128

2.10 FLASHING & TRIM

- A. 26-gauge prefinished metal.
- B. Color: refer to Sheet A6.2 (Finish Legend)

2.11 GUTTERS AND DOWNSPOUTS

- A. 26-gauge prefinished metal.
- B. Continuous gutter of manufacturer's standard profile as indicated on drawings.
 - 1. 6" width x 8" height.
- C. Downspouts of manufacturer's standard profile as indicated on drawings.
 - 1. 5" width x 5" depth.
- D. Color: refer to Sheet A6.2 (Finish Legend)

2.12 ROOF INSULATION

- A. Equal to Silvercote Long Tab and Banding System, Double Layer Insulation System
 - 1. General purpose fiber glass insulation blanks made without formaldehyde for use in roofs of pre-engineered metal buildings.
 - 2. Comply with ASTM C 991, Type I / ASTM E 136 / ASTM E84. Flame Spread Classification of 25/50 or less flame spread/ smoke developed rating.
 - 3. Total R-Value: R-32 at roof

2023111
Addition at Career and Technical Center
(Itawamba County School District)

4. System shall be coordinated and installed to work with roof purlin depth.
5. Strapping: Corrosion resistant, 1" wide x .02 strapping with 100,000 lbs/ square inch tensile strength. Color match to fabric liner. Each strap shall be continuous, no field splicing.
6. Fasteners: Sealing washers and color matched to the fabric liner system. Size and fastening pattern as required by manufacturer.
7. Fabric liner: high density polyethylene fabric with Class A fire retardant rating. Color: White.
8. Thermal space blocks as required by ASHRAE 90.1.
9. Fiberglass blanket insulation is required underneath all roof panels.

B. WALL INSULATION

1. Fiberglass blanket insulation, 6" fiberglass, laminated to 3.2 mil vinyl, UL flame spread of 25 or less.
2. Total R-Value: R-19 at walls
3. System shall be coordinated and installed to work with wall purlin depth.
4. Fiberglass blanket insulation is required underneath all wall panels

2.13 ROOF PENETRATIONS

- A. Notify Architect prior to installation of any penetrations.
- B. Verify type and size of all roof penetrations with Divisions 22 and 28.
- C. All roof penetrations shall be made and installed by the metal building systems contractor.
- D. Round pipe, plumbing stacks, electrical conduits, and flue pipes shall be flashed with EPDM or Neoprene compression molded rubber with 1" wide corrosion-resistant flexible aluminum base. The base flange shall be incorporated with a pleated expansion joint. Set in sealant and use non-corrosive fasteners.
 1. Metal building systems contractor shall coordinate with other trades and provide and install flashing for each condition encountered.
 2. Install flashing in flat portion of panels or through ribs with approval. Consult with Architect if penetration size exceeds spacing of ribs.
 3. Install so as not to block the flow of water.
 4. Review each proposed penetration detail with Architect prior to cutting roof.

2023111
Addition at Career and Technical Center
(Itawamba County School District)

5. Flashing shall be equal to Deck-Mate by Portals Plus or Dektite.
- E. Curbs: Attic fans, exhaust fans, mechanical equipment shall be installed on pre-manufactured 24-gauge aluminum-zinc alloy curbs. Color and finish shall match roof panels.
1. Metal building systems manufacturer shall coordinate with other trades to determine each condition which will be encountered.
 2. Curbs shall be furnished by the trade which is providing and installing the equipment. Curb shall be installed by the metal building system contractor.
 3. Curbs shall be installed under the roof panels on the up-slope end and over the panels at the down-slope end.
 4. Provide additional sub-framing at areas receiving curbs. Install with triple bead tape sealer, sealant, and cinch straps.
 5. Review each proposed penetration detail with Architect prior to cutting roof.
 6. Curbs shall be equal to custom curbs or LM curbs.

2.14 SEALANTS

- A. Sealants for side laps, end laps, accessories, etc., shall be a preformed, butyl rubber-based compound. The material shall be non-hardening, non-shrinking, and non-corrosive and shall have excellent adhesion to metals, painted surfaces, and plastics to temperatures from -30 degrees F to 160 degrees F. These sealants shall be in tape mastic form, of shape and size recommended by manufacturer of metal building for various applications and shall have paper backing for easy handling.
- B. Tube sealants shall be used to supplement tape mastic sealants and shall be applied in locations indicated by erection instructions. Tube sealant shall be a synthetic, elastomeric-based material which becomes tack-free in less than 2 hours at 75 degrees F but retains flexibility.

PART 3 - EXECUTION


3.01 ERECTION

- A. Erection shall be in accordance with appropriate erection drawings and guides by metal building system manufacturer.
- B. It is the responsibility of the erector to comply with all appropriate legal and safety requirements. It is the responsibility of the erector to determine and provide any and all temporary bracing, shoring, blocking, bridging and/or securing of components.
- C. Take special care to coordinate the work of this section with the following work sections:

2023111
Addition at Career and Technical Center
(Itawamba County School District)

1. Section 03 30 00 – Cast-In-Place Concrete (Building Only). Furnish and install anchor bolts, an anchor bolt setting plan, and anchor bolt templates for mounting of primary framing elements.
 2. Section 04 22 00 – Concrete Unit Masonry.
- D. Metal building system contractor shall remove from the site all trash and debris that results from the operations of this category of work.

END OF SECTION

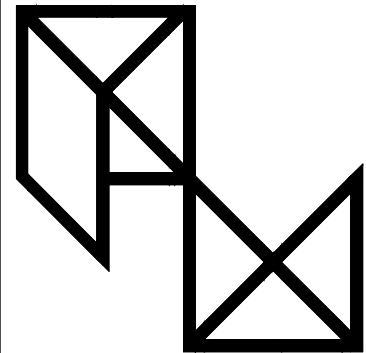


PryorMorrow

Addition at Career and Technical Center

Itawamba County School District

Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
Δ	AUGUST 12, 2024	ADDENDUM No. 2
Δ	AUGUST 16, 2024	ADDENDUM No. 3

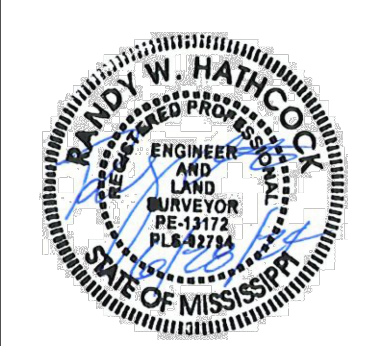

PROJECT NO.	2023111
DRAWN BY:	TH
CHECKED BY:	RH


Copyright © 2024
PryorMorrow PC

EXISTING
TOPO

C100

LEGEND

— G —	GAS LINE
— W —	WATER LINE
— UP —	UNDERGROUND ELECTRIC LINE
— OP —	OVERHEAD ELECTRIC LINE
[Pattern]	SIDEWALK
[Pattern]	GRAVEL
□ AC	AIR CONDITIONER
DS	DOWNSPOUT
GR	GAS REGULATOR
PP	POWER POLE

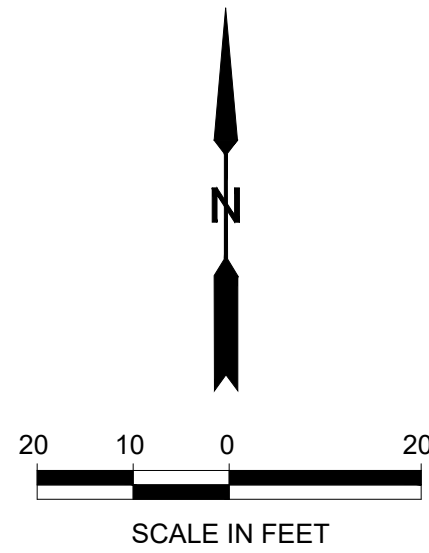


- NOTES
- NOTE 1—
THE LOCATION OF ALL EXISTING STORM DRAINAGE IS BASED ON TOPOGRAPHIC DATA AND INFORMATION PROVIDED BY THE OWNER. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE LOCATION, GRADE, SIZE, AND TYPE OF EXISTING STORM DRAINAGE ITEMS PRIOR TO CONSTRUCTION.
- NOTE 2—
THE LOCATION OF ALL EXISTING UTILITIES IS BASED ON TOPOGRAPHIC DATA AND INFORMATION PROVIDED BY THE OWNER. THERE IS NO GUARANTEE THAT THE UTILITIES SHOWN COMPRISE ALL THE UTILITIES IN THIS AREA. THE LOCATION OF ALL UTILITIES SHOULD BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION.
- NOTE 3—
EXACT LOCATION OF EXISTING IRRIGATION LINES IS UNKNOWN.
- NOTE 4—
EXACT LOCATION OF EXISTING SEWER LINE UNKNOWN.



(Fulton, Mississippi)

PLAN SHEET

C101

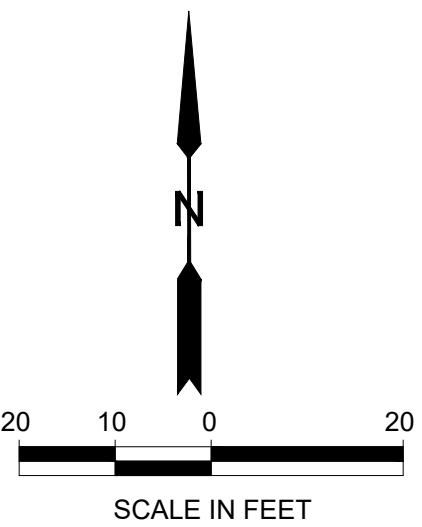

SIDEWALK



HEAVY DUTY CONCRETE

GENERAL NOTES:

NOTE 1-
THE LOCATION OF ALL EXISTING UTILITIES IS BASED ON
TOPOGRAPHIC DATA. THERE IS NO GUARANTEE THAT THE
UTILITY LINES AND SERVICES SHOWN COMPRISE ALL THE
LINES EXISTING IN THIS AREA.

NOTE 2-
THE LOCATION OF ALL EXISTING STORM DRAINAGE IS
BASED ON TOPOGRAPHIC DATA. IT SHALL BE THE
CONTRACTORS RESPONSIBILITY TO VERIFY THE LOCATION,
GRADE, SIZE AND TYPE OF EXISTING STORM DRAIN ITEMS
PRIOR TO CONSTRUCTION.

NOTE 3-
THE CONTRACTOR IS RESPONSIBLE FOR SAFELY
MAINTAINING TRAFFIC AT ALL TIMES DURING THE
CONSTRUCTION OF THE PROJECT.

NOTE 4-
ANY EXISTING MANHOLES, WATER VALVES, METER BOXES,
ETC. TO REMAIN WITHIN THE PROJECT LIMITS SHALL BE
ADJUSTED BY THE CONTRACTOR AS NECESSARY TO
MATCH NEW CONSTRUCTION.

NOTE 5-
ALL EXISTING TREES AND ROOT BALLS TO BE REMOVED
BY CONTRACTOR

LAYOUT NOTES

NOTE 1-
ALL DIMENSIONS ARE TO THE FACE OF CURB, WHERE
APPLICABLE

NOTE 2-
IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY
LOCATION OF PROPERTY LINE MONUMENTATION BEFORE
COMMENCING CONSTRUCTION



NOTE 3-
OUTLINE OF BUILDING SHOWN FOR REFERENCE ONLY.
REFER TO ARCHITECTURAL DRAWINGS FOR BUILDING LAYOUT
INFORMATION.

NOTE 4-
ALL SIDEWALK JOINTS ARE TO BE TOOLED AND NOT SAW CUT.
SIDEWALK JOINTS AS SHOWN ON PLANS.

NOTE 5-
SEWER AND STORM DRAINAGE TO BE PUT IN BEFORE OTHER
UTILITIES. OTHER UTILITIES WILL BE PUT IN AS NEED TO
AVOID CONFLICT WITH GRAVITY FED UTILITIES.

NOTE 6-
THRUST BLOCKS REQ'D AT WATER LINE BENDS. SEE DETAIL
SHEET.

THURST BLOCK DETAIL
SCALE: NOT TO SCALE

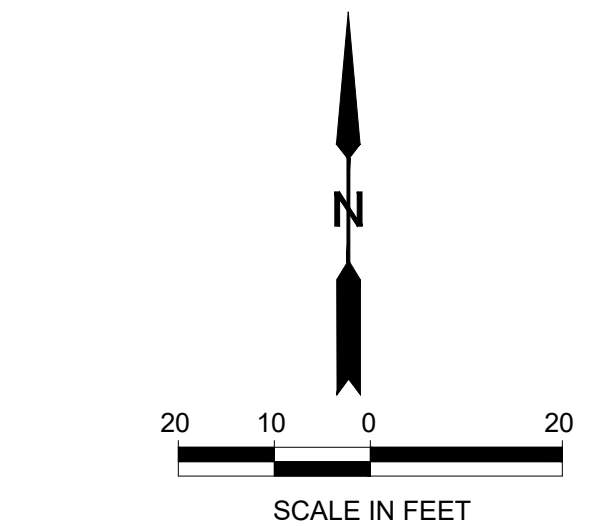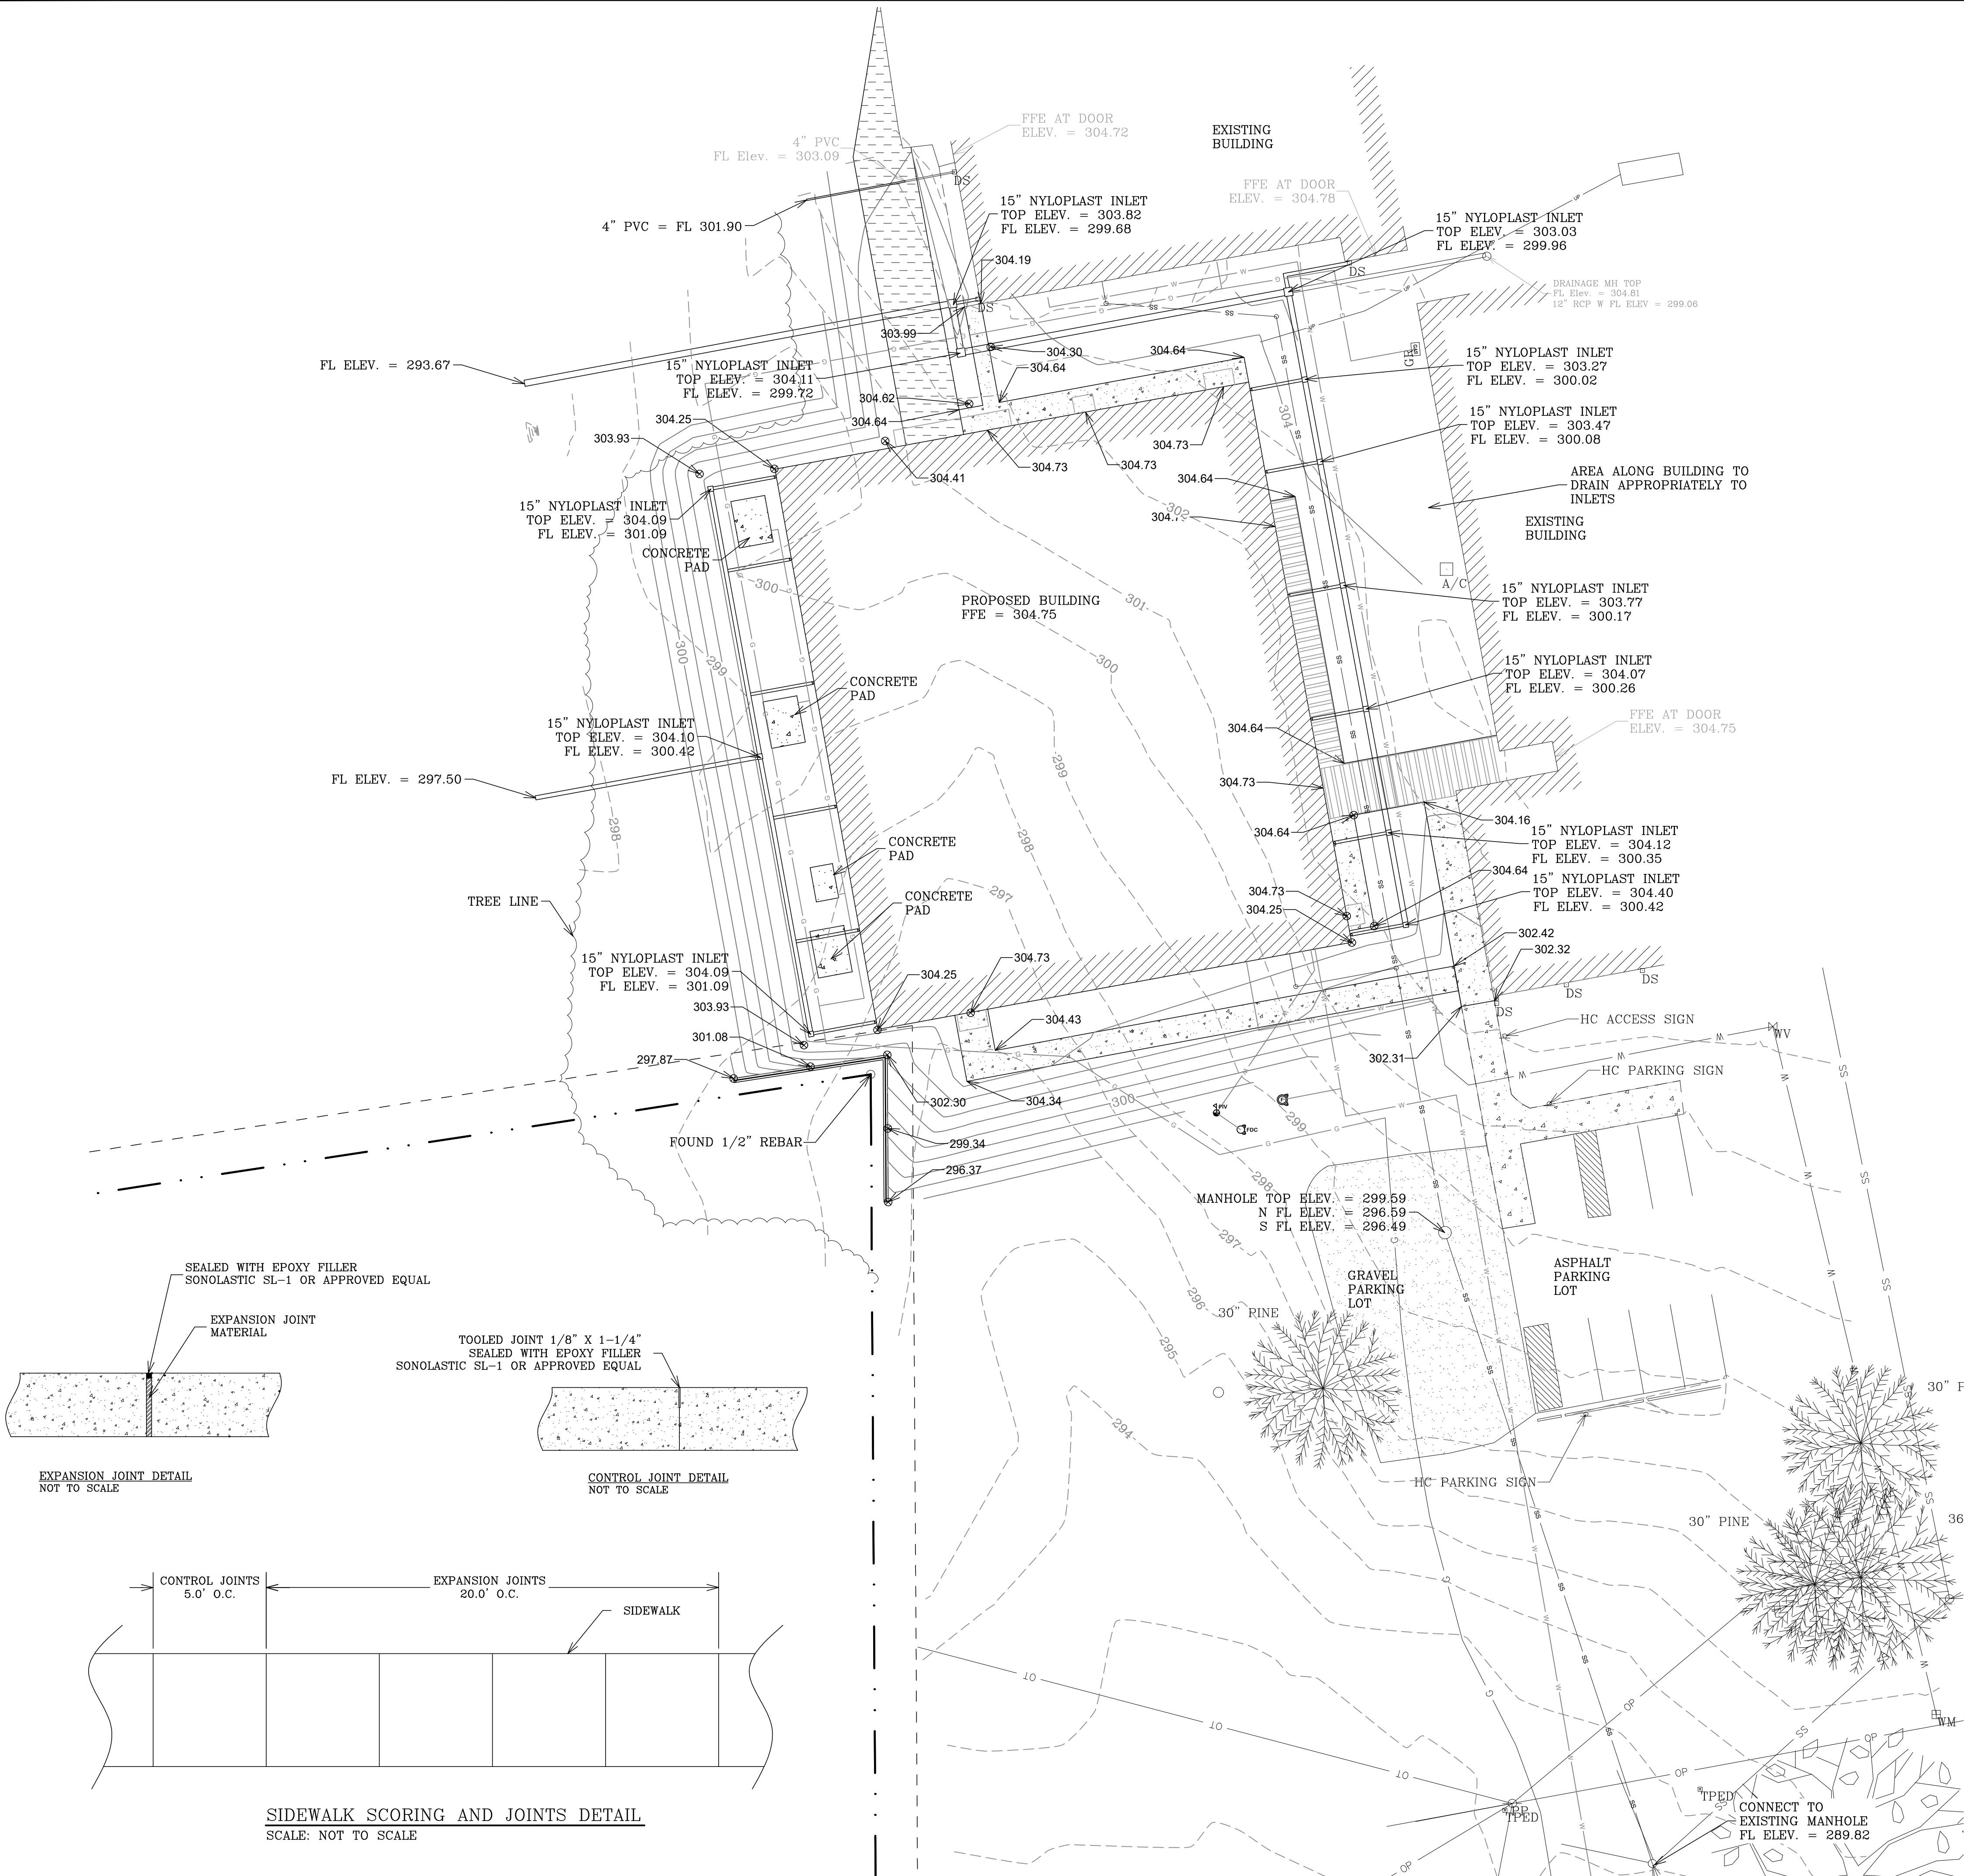


000.00 —> SIDEWALK GRADE
000.00 —> SPOT GRADE

GENERAL NOTES:

- NOTE 1- THE LOCATION OF ALL EXISTING UTILITIES IS BASED ON TOPOGRAPHIC DATA. THERE IS NO GUARANTEE THAT THE UTILITY LINES AND SERVICES SHOWN COMPRISE ALL THE LINES EXISTING IN THIS AREA.
- NOTE 2- THE LOCATION OF ALL EXISTING STORM DRAINAGE IS BASED ON TOPOGRAPHIC DATA. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO VERIFY THE LOCATION, GRADE, SIZE AND TYPE OF EXISTING STORM DRAIN ITEMS PRIOR TO CONSTRUCTION.
- NOTE 3- THE CONTRACTOR IS RESPONSIBLE FOR SAFELY MAINTAINING TRAFFIC AT ALL TIMES DURING THE CONSTRUCTION OF THE PROJECT.
- NOTE 4- ANY EXISTING MANHOLES, WATER VALVES, METER BOXES, ETC. TO REMAIN WITHIN THE PROJECT LIMITS SHALL BE ADJUSTED BY THE CONTRACTOR AS NECESSARY TO MATCH NEW CONSTRUCTION.
- NOTE 5- ALL EXISTING TREES AND ROOT BALLS TO BE REMOVED BY CONTRACTOR

GRADING NOTES

- NOTE 1- ALL AREAS SHALL BE GRADED TO DRAIN TO THE APPROPRIATE INLET OR SLOPE TO ENSURE POSITIVE DRAINAGE ACROSS THE PROPERTY.
- NOTE 2- THERE IS NO GUARANTEE THAT THE DRAINAGE AND UTILITIES SHOWN COMPRISE ALL THE ITEMS IN THIS AREA. THE LOCATION OF ALL DRAINAGE AND UTILITIES SHOULD BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION.
- NOTE 3- EXCAVATION AND EMBANKMENT CONSTRUCTION MAY BEGIN AFTER THE REQUIRED DEMOLITION AND REMOVAL HAS BEEN COMPLETED AND APPROVED.
- NOTE 4- FINISH CONTOURS SHOWN REFLECT FINISH PAVEMENT GRADES (WHERE APPLICABLE).
- NOTE 5- IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY LOCATION OF PROPERTY LINE MONUMENTATION BEFORE COMMENCING CONSTRUCTION.
- NOTE 6- CROSS SLOPES FOR SIDEWALKS AND CROSSWALKS SHALL NOT EXCEED 2.00%.
- NOTE 7- POSITIVE DRAINAGE AWAY FROM BUILDING IS REQUIRED IN ALL AREAS.
- NOTE 8- SEWER AND STORM DRAINAGE WILL BE PUT IN BEFORE OTHER UTILITIES. OTHER UTILITIES WILL BE PUT IN AS NEED TO AVOID CONFLICT WITH GRAVITY FED UTILITIES
- NOTE 9- EXACT EXISTING SEWER LINE LOCATION UNKNOWN. CONTRACTOR TO LOCATE AND CONNECT SEWER LINE PRIOR TO COMMENCEMENT OF WORK.

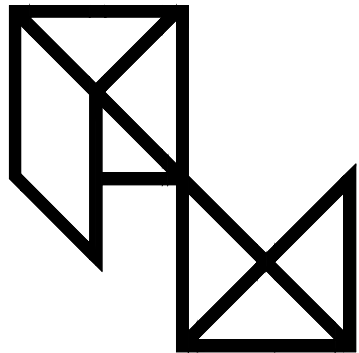

PryorMorrow

Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
Δ	AUGUST 12, 2024	ADDENDUM No. 2
Δ	AUGUST 16, 2024	ADDENDUM No. 3




PROJECT NO.	2023111
DRAWN BY:	TH
CHECKED BY:	RH

Copyright © 2024
PryorMorrow PC

GRADING
SHEET

C102

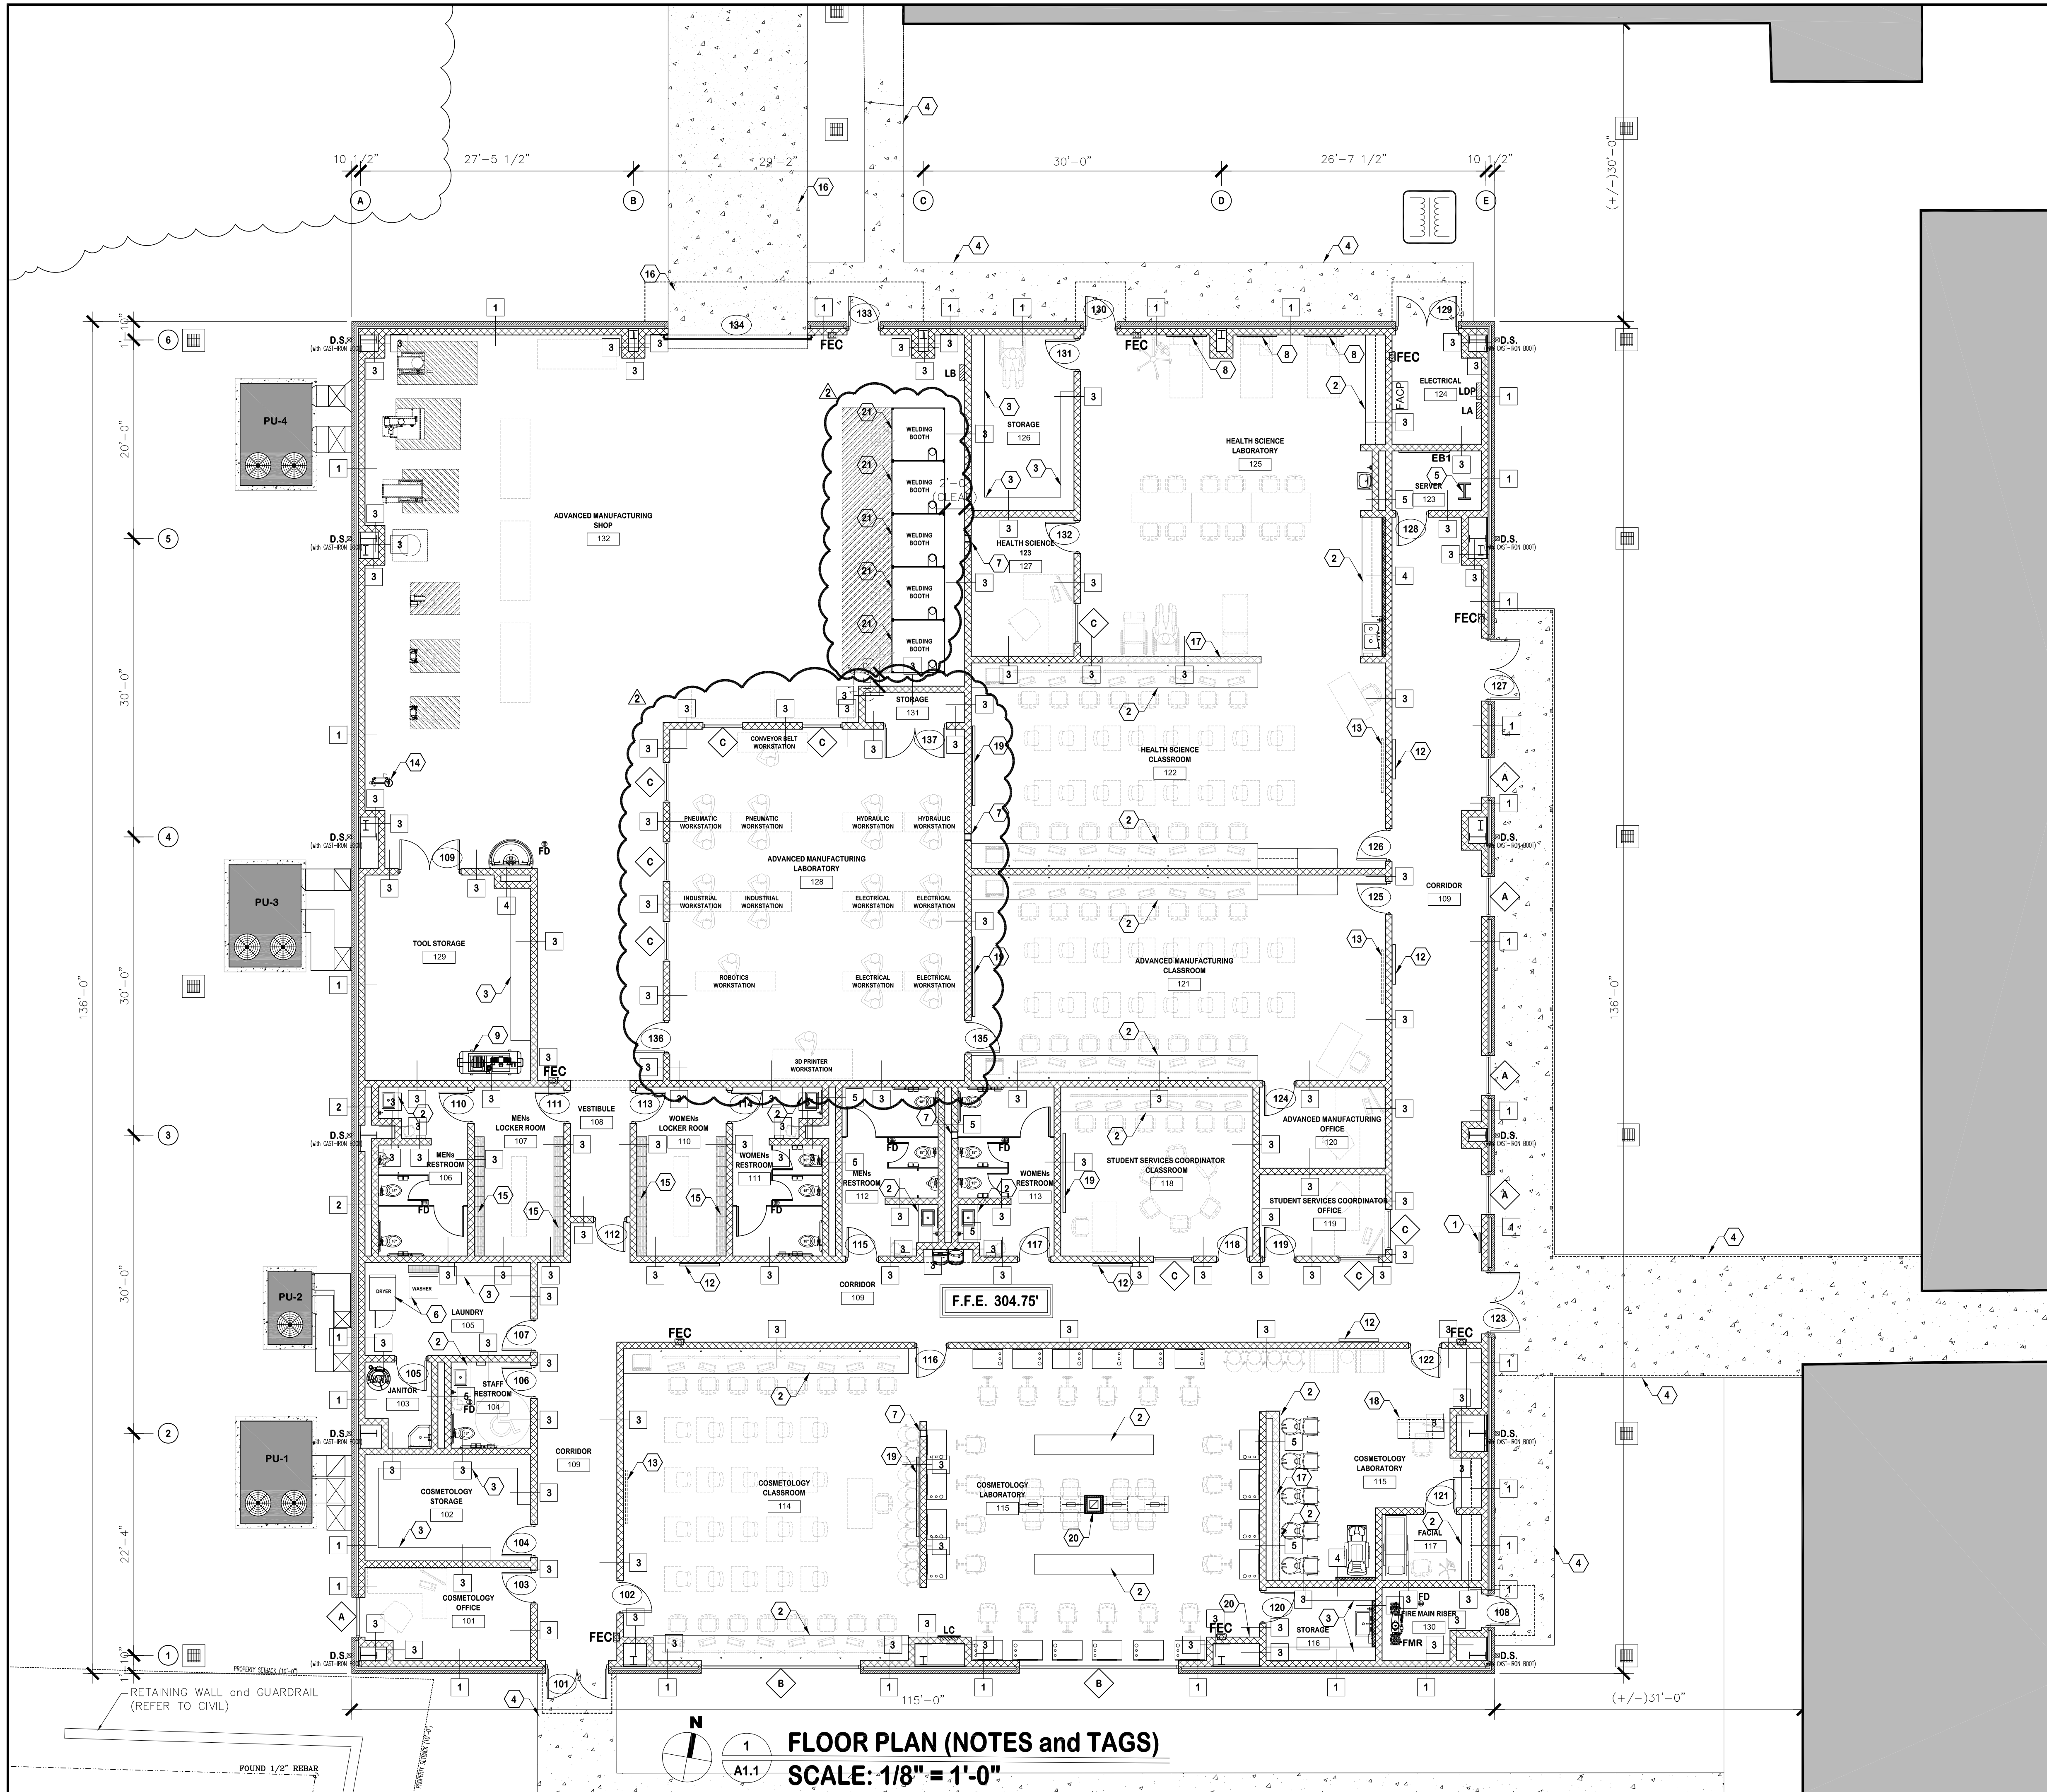

GENERAL NOTE

NOTE TO CONTRACTOR:

-LOOSE FURNITURE (I.E. DESK and CHAIRS) ARE NOT IN THE CONTRACT

-REFER TO CIVIL DRAWINGS FOR FULL EXTENTS OF NEW SIDEWALKS, UTILITY INFORMATION and CIVIL DETAILS

-PROVIDE AT A MINIMUM, A CONTROL JOINT LESS THAN 30'-0" FROM ONE ANOTHER (INTERIOR and EXTERIOR WALLS) (REFER TO DETAILS 10/A5.2 and 11/A5.2)

-FLOOR DRAINS ARE DENOTED ON FLOOR SURFACE and PATTERN PLAN (REFER TO SHEET A1.3 and PLUMBING)

SPECIFIC NOTE

NOTE TO CONTRACTOR:

1 BUILDING PLAQUE

2 SOLID SURFACE COUNTERTOP

3 UTILITY SHELVE

4 NEW CONCRETE SIDEWALK (REFER TO CIVIL FOR FULL EXTENTS)

5 SERVER RACK (BY OWNER)

6 WASHER or DRYER

7 EXPOSED STEEL STRUCTURE (PRIME and PAINT) (REFER TO STRUCTURAL)

8 NURSE HEADWALL (REFER TO ELECTRICAL)

9 AIR COMPRESSOR (REFER TO PLUMBING and ELECTRICAL)

10 FLOOR TRENCH (REFER TO STRUCTURAL and PLUMBING)

11 TV LOCATION (8'-0" A.F.F.)(PROVIDED BY OWNER) (REFER TO ELECTRICAL)

12 TACKBOARD

13 PROMETHEAN BOARD (BY OWNER)

14 EMERGENCY EYEWASH STATION (REFER TO PLUMBING)

15 METAL LOCKERS (DOUBLE TIER)

16 HEAVY DUTY CONCRETE PAVING (REFER TO CIVIL FOR FULL EXTENTS)

17 HALF WALL (48" TALL) (REFER TO DETAIL 1/A3.13 or 2/A3.13)

18 RECEPTIONIST DESK

19 MARKER BOARD

20 ACCESS PANEL

21 NEW WELDING BOOTH and HANGING FUME ARM (REFER TO MECHANICAL and ELECTRICAL)

SPECIFIC WALL NOTES

NOTE TO CONTRACTOR:

-REFER TO SHEET LIFE SAFETY DRAWINGS FOR WALLS and FLOORS REQUIRED TO BE RATED.

SPECIFIC ASHRAE NOTES

NOTE TO CONTRACTOR:

-ANSI/ASHRAE/IES STANDARD 90.1-2010 (CLIMATE ZONE 3A)


MINIMUM R-VALUE REQUIRED
ROOF (METAL BUILDING) R-13 + R-13

WALL (MASS) R-7.6 c.i.
WALL (METAL BUILDING) R-19.0 c.i.

R-VALUE PROVIDED
ROOF (METAL BUILDING) R-32
(4" THICK UPPER LEVEL) + (6" THICK LOWER LEVEL)

WALL (MASS) R-11.4
(2" FIBERGLASS)

WALL (METAL BUILDING) R-19.0
(6" THICK)

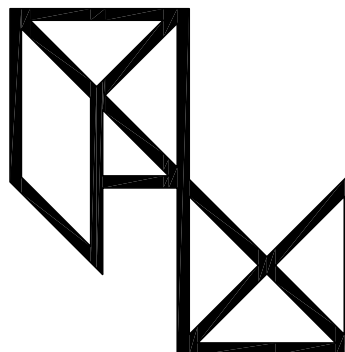

PryorMorrow

Addition at Career and Technical Center Itawamba County School District Itawamba County (Fulton, Mississippi)

DESCRIPTION	DATE	MARK
SCHEMATIC DESIGN	MARCH 28, 2024	SD
DESIGN DEVELOPMENT	MAY 31, 2024	DD
CONSTRUCTION DOCUMENTS	JUNE 28, 2024	CD
ADDENDUM No. 2	AUGUST 12, 2024	Δ
ADDENDUM No. 3	AUGUST 16, 2024	Δ



AUGUST 16, 2024

PROJECT NO. 2023111

DRAWN BY: BHK

CHECKED BY: MWT

Copyright © 2024

PryorMorrow PC

ARCHITECTURAL:


-FLOOR PLAN

(NOTES and TAGS)

A1.1



SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	
CD	JUNE 28, 2024	
		CONSTRUCTION DOCUMENTS
<u>A</u>	AUGUST 12, 2024	ADDENDUM No. 2
<u>A</u>	AUGUST 16, 2024	ADDENDUM No. 3



Copyright © 2024
PryorMorrow PC

A1.2

	CEILING GRID
	LIGHT, 2'x2', LED (GRID MOUNT)
	LIGHT, 2'x4', LED (GRID MOUNT)
	LIGHT, 4' STRIP, LED (SURFACE MOUNT)
	LIGHT, ROUND (RECESSED MOUNT)
	EXIT LIGHT
	SMOKE DETECTOR
	SPRINKLER HEAD
	EXHAUST FAN
	HVAC DIFFUSER (RETURN)
	HVAC DIFFUSER (SUPPLY)
	CAMERA
	TRANSFER GRILL (RETURN)

Type I	2x2 Lay-In Tile (Standard)
Type II	2x2 Lay-In Tile (Vinyl Coated)
Type III	Suspended Gypsum Board (PRIME and PAINT)
Type IV	Prefinished Aluminum Awning or Protective Cover
Type V	Exposed Roof Deck and Structure (PRIME and PAINT) (DO NOT PAINT INSULATION)
Type VI	Gypsum Board Furredown (PRIME and PAINT)

NOTE TO CONTRACTOR:

-REFER TO MECHANICAL and ELECTRICAL FOR REGISTERS, GRILLES, DIFFUSERS, LIGHT FIXTURES, ETC.

-PRIME and PAINT ALL STEEL LINTELS

NOTE TO CONTRACTOR:

—ANSI/ASHRAE/IES STANDARD 90.1-2010 (CLIMATE ZONE 3A)

MINIMUM R-VALUE <u>REQUIRED</u>	
ROOF (METAL BUILDING)	R-13 + R-13
WALL (MASS)	R-7.6 c.i.
WALL (METAL BUILDING)	R-19.0 c.i.

R-VALUE <u>PROVIDED</u>	
ROOF (METAL BUILDING)	R-32 (4" THICK UPPER LEVEL) + (6" THICK LOWER LEVEL)
WALL (MASS)	R-11.4 (2" FIBERGLASS)
WALL (METAL BUILDING)	R-19.0 (6" THICK)






SPECIFIC NOTE

NOTE TO CONTRACTOR:

- REFER TO MECHANICAL and ELECTRICAL FOR ALL ROOF PENETRATIONS
- ALL PREFINISHED METAL GUTTERS ARE 6"x8" UNLESS NOTED OTHERWISE
- ALL PREFINISHED METAL DOWNSPOUTS ARE 5"x5" UNLESS NOTED OTHERWISE
- DOWNSPOUTS DISCHARGE INTO CAST-IRON BOOT. REFER TO CIVIL FOR FULL EXTENT OF SUBSURFACE DRAINAGE SYSTEM

LEGEND




SPECIFIC ASHRAE NOTES

NOTE TO CONTRACTOR:

-ANSI/ASHRAE/IES STANDARD 90.1-2010 (CLIMATE ZONE 3A)

MINIMUM R-VALUE REQUIRED ROOF (METAL BUILDING)	R-13 + R-13
WALL (MASS)	R-7.6 c.i.
WALL (METAL BUILDING)	R-19.0 c.i.
R-VALUE PROVIDED ROOF (METAL BUILDING)	R-32 (4" THICK UPPER LEVEL) + (6" THICK LOWER LEVEL)
WALL (MASS)	R-11.4 (2" FIBERGLASS)
WALL (METAL BUILDING)	R-19.0 (6" THICK)

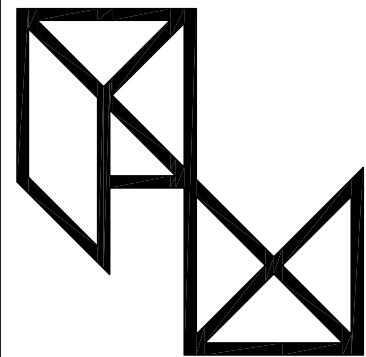

PryorMorrow

Addition at Career and Technical Center Itawamba County School District Itawamba County (Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
△	AUGUST 12, 2024	ADDENDUM No. 2
△	AUGUST 16, 2024	ADDENDUM No. 3



PROJECT NO.	2023111
DRAWN BY:	BHK
CHECKED BY:	MWT

Copyright © 2024
PryorMorrow PC

ARCHITECTURAL:
-ROOF PLAN

A1.4

Room Finish Schedule







First Floor


Room No.	Room Name	Floor	Molding		Walls	Ceiling		Notes:
			Base	Crown		Type	Height	
101	COSMETOLOGY OFFICE	LVT-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	
102	COSMETOLOGY STORAGE	LVT-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	
103	JANITOR	RS-1	RB-1	—	CMU (P-1)	PT-1	9'-0"	
104	STAFF RESTROOM	PT-1		—	CMU (P-1 and PT-2)	ACT-2	9'-4"	
105	LAUNDRY	RS-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	
106	MENs RESTROOM	PT-1	PTB-1	—	CMU (P-1 and PT-2)	ACT-2	9'-4"	
107	MENs LOCKER ROOM	PT-1	PTB-1	—	CMU (P-1)	ACT-1	9'-4"	1. FURRDOWN TYPE VI, 8'-0" AFF 2. WALL TILE RUNS FULL HEIGHT
108	VESTIBULE	RS-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	1. FURRDOWN TYPE VI, 7'-0" AFF
109	CORRIDOR	LVT-1	RB-1 and PTB-1	—	CMU (P-1 and PT-2)	ACT-1	10'-0"	1. FURRDOWN TYPE VI, 8'-8" AFF 2. WALL TILE RUNS FULL HEIGHT AT DRINKING FOUNTAIN ALCOVE
110	WOMENs LOCKER ROOM	PT-1	PTB-1	—	CMU (P-1)	ACT-1	9'-4"	1. FURRDOWN TYPE VI, 7'-0" AFF
111	WOMENs RESTROOM	PT-1	PTB-1	—	CMU (P-1 and PT-2)	ACT-2	9'-4"	1. FURRDOWN TYPE VI, 8'-0" AFF 2. WALL TILE RUNS FULL HEIGHT
112	MENs RESTROOM	PT-1	PTB-1	—	CMU (P-1 and PT-2)	ACT-2	9'-4"	1. FURRDOWN TYPE VI, 8'-0" AFF 2. WALL TILE RUNS FULL HEIGHT
113	WOMENs RESTROOM	PT-1	PTB-1	—	CMU (P-1 and PT-2)	ACT-2	9'-4"	1. FURRDOWN TYPE VI, 8'-0" AFF 2. WALL TILE RUNS FULL HEIGHT
114	COSMETOLOGY CLASSROOM	LVT-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	1. CMU LINTEL BETWEEN SAPCES, 8'-0" AFF 2. FURRDOWN TYPE VI, 7'-0" AFF
115	COSMETOLOGY LABORATORY	LVT-1	RB-1	—	CMU (P-1)	ACT-1	10'-0" and 8'-0"	
116	STORAGE	LVT-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	
117	FACIAL	LVT-1	RB-1	—	CMU (P-1)	ACT-1	8'-8"	1. FURRDOWN TYPE VI, 7'-0" AFF
118	STUDENT SERVICES COORDINATOR CLASSROOM	LVT-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	
119	STUDENT SERVICES COORDINATOR OFFICE	LVT-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	
120	ADVANCED MANUFACTURING OFFICE	LVT-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	
121	ADVANCED MANUFACTURING CLASSROOM	LVT-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	
122	HEALTH SCIENCE CLASSROOM	LVT-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	
123	SERVER	SC-1	RB-1	—	CMU (P-1)	P-4	8'-0"	
124	ELECTRICAL	SC-1	RB-1	—	CMU (P-1)	P-4	10'-0"	
125	HEALTH SCIENCE LABORATORY	LVT-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	1. FURRDOWN TYPE VI, 7'-0" AFF
126	STORAGE	LVT-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	
127	HEALTH SCIENCE OFFICE	LVT-1	RB-1	—	CMU (P-1)	ACT-1	9'-4"	
128	ADVANCED MANUFACTURING LABORATORY	RS-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	
129	TOOL STORAGE	RS-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	
130	TOOL CLOSET RISER	RS-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	
131	STORAGE	RS-1	RB-1	—	CMU (P-1)	ACT-1	10'-0"	
132	ADVANCED MANUFACTURING SHOP	RS-1	RB-1	—	CMU (P-1)	—	VARIES	

GENERAL NOTE

- ALL FLOORING TRANSITIONS SHALL OCCUR UNDER DOOR WHEN DOOR IS IN THE CLOSED POSITION.
- ALL RUBBER FLOORING TRANSITION STRIPS COLOR SHALL MATCH RUBBER BASE AS SPECIFIED BY ROOM FINISH SCHEDULE.
- FLOORING INSTALLER TO BEGIN INSTALLATION OF PORCELAIN FLOOR TILE IN RESTROOMS ON CENTER OF FLOOR DRAIN. DRAIN TO BE SHOWN IN SHOP DRAWINGS. SEE FLOOR PATTERN PLAN.
- FLOORING MATERIAL TO EXTEND UNDER MILLWORK.
- WHERE TWO FLOORING PRODUCTS MEET, THE SUBFLOOR SHOULD BE FLOATED TO ACHIEVE A SMOOTH TRANSITION.
- MINIMUM OF 48 HOURS MUST BE ALLOWED AFTER ABATEMENT BEFORE INSTALLATION OF NEW FLOORING BEGINS.
- ALL FLOORING and RUBBER WALL BASE SHALL BE ACCLIMATE IN SPACE 48 HOURS PRIOR TO INSTALLATION.
- CARPET CUTS ALONG THE PERIMETER OF THE FLOOR TO BE NO LESS THAN 6".
- WET AREAS TO BE PAINTED WITH EPOXY PAINT.
- ALL PAINT AT GYPSUM BOARD WALLS TO BE EGGSHELL FINISH UNLESS OTHERWISE SPECIFIED ON THE ROOM FINISH SCHEDULE and FINISH LEGEND.
- PAINT CONTRACTOR SHALL PROVIDE AN ONSITE MOCK-UP FOR ARCHITECT APPROVAL. SIZE 5"x5" OF EACH COLOR. CONFIRM MOCK-UP LOCATION AT PREFINISH INSTALLATION MEETING WHICH WILL BE SCHEDULED BY CONTRACTOR.
- MISCELLANEOUS METAL (CONTROL PANELS, SUPPLY and RETURN AIR GRILLES) LOCATED ON WALLS SHALL MATCH WALL COLOR. METAL FINISHES TO BE SUBMITTED FOR FINAL APPROVAL. IF GRILLE IS LOCATED AT FLOOR, ARCHITECT TO PROVIDE COLOR.
- ACOUSTICAL TILE CUTS ALONG THE PERIMETER TO BE NO LESS THAN 6".
- ALL SOFFIT AREAS TO BE PAINTED WITH A FLAT FINISH. REFER TO FINISH LEGEND. THIS INCLUDES HORIZONTAL and VERTICAL SURFACES OF THE SOFFIT.
- REFER TO REFLECTED CEILING PLAN FOR ALL CEILING HEIGHTS and SOFFIT LOCATIONS.
- REFER TO DOOR SCHEDULE FOR FINISH OF DOORS. FOR STAIN GRADE DOORS, SUBMIT STAIN SAMPLES FOR APPROVAL FOR ALL PREFINISHED DOORS.
- CONTRACTOR SHALL SUBMIT TWO (2) SAMPLES OF ALL MATERIALS LISTED ON ROOM FINISH SCHEDULE. ARCHITECT IS NOT RESPONSIBLE FOR INSTALLED MATERIALS THAT HAVE NOT BEEN SUBMITTED and APPROVED.
- ALL DOOR FRAMES and WOOD TRIM TO BE PAINTED WITH SEMI-GLOSS ENAMEL OIL FINISH.
- ALL RUBBER WALL BASE TO BE PURCHASED ON A CONTINUOUS ROLL. NO PREFORMED CORNERS ARE PERMITTED. NO CUTS MIDWAY ALONG A WALL ARE PERMITTED. BASE SHALL BE INSTALLED STRAIGHT and TRUE WITH NO BUMP or GAPS AT WALL. REFER TO FINISH LEGEND FOR SIZE.
- SHOP DRAWINGS ARE REQUIRED FOR ARCHITECT APPROVAL ON ALL MILLWORK.
- ALL MILLWORK SHALL BE CAULKED BY MILLWORK CONTRACTOR. CONTRACTOR TO PROVIDE FULL RANGE OF COLORS TO MATCH MILLWORK.
- SPECIFIC LOCATION OF PLASTIC LAMINATE WILL BE DESIGNATED ON MILLWORK SHOP DRAWINGS. PROVIDE 3MM EDGE BAND FOR ALL LAMINATE COUNTERTOPS UNLESS DIRECTED OTHERWISE.
- ALL MILLWORK DIMENSIONS TO BE FIELD VERIFIED BY MILLWORK CONTRACTOR.
- REFER TO SPECIFICATIONS FOR ADDITIONAL PRODUCT INFORMATION NOT INCLUDED IN THE ROOM FINISH SCHEDULE and FINISH LEGEND.

Finish Legend

FLOOR FINISH	FLOOR BASE	WALLS	CEILINGS	MISCELLANEOUS	EXTERIOR
 PT-1 PORCELAIN FLOOR TILE MANUFACTURER: AMERICAN OLEAN UNGLAZED STYLE: UNGLAZED COLOR BODY PORCELAIN MOSIACS COLOR: TRUSTED BLEND (0A48) SIZE: 1"x1" PATTERN: MONOLITHIC GROUT COLOR: LATICRETE (97 IRON)	 RB-1 RESILIENT BASE MANUFACTURER: FLEXCO STYLE: 4" TRADITIONAL COLOR: BLACK DANILIA (01) SIZE: 4" CONTINUOUS LOCATION: REFER TO ROOM FINISH SCHEDULE	 P-1 PAINT MANUFACTURER: SHERWIN WILLIAMS COLOR: SW6079 DIVERSE BEIGE FINISH: EGGSHELL	 ACT-1 ACOUSTICAL CEILING TILE MANUFACTURER: ARMSTRONG STYLE: CIRRUS TEGULAR 584 COLOR: WHITE SIZE: 24"x24"	 P-2 PAINT MANUFACTURER: SHERWIN WILLIAMS COLOR: SW6258 BLACK MAGIC FINISH: SEMI GLOSS LOCATIONS: - HOLLOW METAL DOOR FRAME (INTERIOR) - HOLLOW METAL DOOR (INTERIOR)	 P-5 PAINT MANUFACTURER: SHERWIN WILLIAMS COLOR: SW7048 URBANE BRONZE FINISH: SEMI GLOSS LOCATIONS: - HOLLOW METAL DOOR FRAME (EXTERIOR) - HOLLOW METAL DOOR (EXTERIOR) - DOWNSPOUT BOOT
 LVT-1 LUXURY VINYL TILE MANUFACTURER: J+J FLOORING COLLECTION: CLASSICS II STYLE: V5023 COLOR: PRINCIPLE 1107 SIZE: 9"x48" PATTERN: ASHLAR	 PTB-1 PORCELAIN TILE BASE MANUFACTURER: AMERICAN OLEAN UNGLAZED STYLE: UNGLAZED COLOR BODY PORCELAIN MOSIACS COLOR: TRUSTED BLEND (0A48) SIZE: 1"x1" PATTERN: MONOLITHIC GROUT COLOR: LATICRETE (97 IRON)	 P-3 PAINT MANUFACTURER: SHERWIN WILLIAMS COLOR: SW7069 IRON ORE FINISH: EGGSHELL	 ACT-2 ACOUSTICAL CEILING TILE MANUFACTURER: ARMSTRONG STYLE: CLEAN ROOM VL 868 COLOR: WHITE SIZE: 24"x24"	 SS-1 SOLID SURFACE COUNTERTOP MANUFACTURER: CORIAN COLOR: ARTISTA CANVAS FINISH: MATTE	 PEMB (WALL PANEL) METAL BUILDING SYSTEM MANUFACTURER: CECO PANEL TYPE: PBR COLOR: BROWNSTONE
 RSF-1 RESINOUS FLOORING MANUFACTURER: STONHARD COLLECTION: STONCLAD GS TOPCOAT: STONKOTE GS4 COLOR: PEWTER THICKNESS: 3/16"		 CT-1 PORCELAIN WALL TILE MANUFACTURER: AMERICAN OLEAN STYLE: CLEARSTORY WALL COLLECTION COLOR: MATTE STABLE (0052) SIZE: 4"x12"x1/4" PATTERN: RUNNING BOND GROUT COLOR: LATICRETE (44 BRIGHT WHITE)	 P-4 PAINT MANUFACTURER: SHERWIN WILLIAMS COLOR: SW7005 PURE WHITE FINISH: FLAT	 LAM-1 PLASTIC LAMINATE MANUFACTURER: FORMICA COLOR: BLACK (909-58)	 PEMB (ROOF PANEL) METAL BUILDING SYSTEM MANUFACTURER: CECO PANEL TYPE: DOUBLE-LOK COLOR: POLAR WHITE
 GR-2 FLOOR TILE GROUT MANUFACTURER: LATICRETE COLOR: 97 IRON		 CT-2 PORCELAIN WALL TILE (BACKSPLASH) MANUFACTURER: AMERICAN OLEAN STYLE: CLEARSTORY WALL COLLECTION COLOR: MATTE STABLE (0052) SIZE: 3"x6"x1/4" PATTERN: RUNNING BOND GROUT COLOR: LATICRETE (44 BRIGHT WHITE)		 TP-1 TOILET PARTITIONS MANUFACTURER: SCRANTON PRODUCTS COLOR: SHALE TEXTURE: ORANGE PEEL	 PEMB (GUTTER and DOWNSPOUTS) METAL BUILDING SYSTEM MANUFACTURER: CECO COLOR: MIDNIGHT BRONZE
 SC-1 SEALED CONCRETE SEALER: ACRYLIC BASE COMPOUND (GRAY)		 GR-1 WALL TILE GROUT MANUFACTURER: LATICRETE COLOR: 44 BRIGHT WHITE		 FWD-1 FLUSH WOOD DOORS MANUFACTURER: MASONITE SPECIES: ROTARY WHITE BIRCH STAIN: CLEAR	 PEMB (FLASHING and TRIM) METAL BUILDING SYSTEM MANUFACTURER: CECO COLOR: MIDNIGHT BRONZE
		 PEMB (LINER PANEL) METAL BUILDING SYSTEM MANUFACTURER: MBCI PANEL TYPE: ARTISAN COLOR: POLAR WHITE		 ALUM-1 ALUMINUM FRAMED ENTRANCES and STOREFRONTS MANUFACTURER: KAWNEER FINISH: DARK-BRONZE (ANODIZED)	 BRICK MASONRY BRICK MASONRY MANUFACTURER: CHEROKEE BRICK COMPANY COLLECTION: VELOUR OATMEAL
				 CLST-1 CLOSET and UTILITY SHELVING MANUFACTURER: KNAPE & VOGT STANDARDS: ANACHROME BRACKETS: ANACHROME SHELVING: BLACK	 MASONRY MORTAR MORTAR MANUFACTURER: HOLCIM COLOR: DESERT BUFF
				 OCD-1 OVERHEAD COILING DOOR MANUFACTURER: RAYNOR COLOR: RAL 7039	 PROTECTIVE COVERS PROTECTIVE WALKWAY COVERS MANUFACTURER: ALUMINUM CONTRACTORS COLOR: DARK-BRONZE (BAKED ENAMEL)

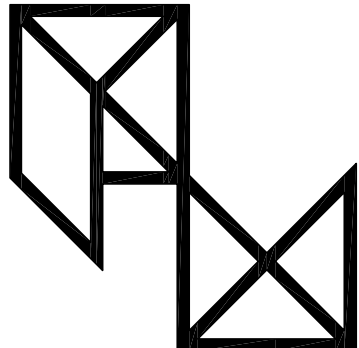

PryorMorrow

Addition at Career and Technical Center Itawamba County School District Itawamba County (Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
△	AUGUST 12, 2024	ADDENDUM No. 2
△	AUGUST 16, 2024	ADDENDUM No. 3




AUGUST 16, 2024

PROJECT NO.	2023111
DRAWN BY:	BHK
CHECKED BY:	MWT

Copyright © 2024
PryorMorrow PC

ARCHITECTURAL
-ROOM FINISH SCHEDULE

A6.2

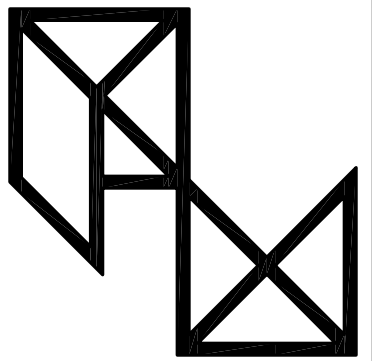

PryorMorrow

Addition at Career and Technical Center

Itawamba County School District

Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
A	AUGUST 16, 2024	ADDENDUM No. 3



PROJECT NO.	2023111
DRAWN BY:	RDH
CHECKED BY:	CDR



Copyright © 2024
PryorMorrow PC

MECHANICAL PLAN


M2.1

MECHANICAL PLAN NOTES

- PROVIDE TURNING VANES AT ALL SQUARE T'S, 90°, & 45° FITTINGS.
 - PROVIDE VOLUME DAMPERS AT BRANCH DUCTS.
 - COORDINATE EXHAUST PENETRATIONS TO HAVE A MINIMUM OF 10' SEPARATION.
 - COORDINATE DUCT ROUTING W/OTHER TRADES TO AVOID CONFLICTS.
 - DO NOT ROUTE DUCTWORK DIRECTLY OVER ELECTRICAL PANELS.
 - REFER TO ELECTRICAL FOR ALL HVAC SMOKE DETECTOR LOCATIONS.
 - SUPPLY/RETURN DUCTWORK SHALL ENTER BUILDING AT 12'-4" AFF TO BOTTOM OF DUCTWORK.
 - EXPOSED DUCTWORK IN ADVANCED MANUFACTURING LAB 128 SHALL BE DOUBLE WALL SPIRAL DUCT. PAINT COLOR SELECTED BY ARCHITECT.
- 1 CUT WALL AS REQUIRED FOR INSTALLATION OF SUPPLY/RETURN DUCTWORK. SEAL OPENINGS WATER TIGHT.
 - 2 ROUTE EXHAUST DUCT UP THROUGH ROOF. TERMINATE WITH RAIN CAP AND BIRD SCREEN.
 - 3 FURNISH AND INSTALL EXHAUST FAN (REF) IN LOCATION SHOWN. ROUTE EXHAUST DUCT FROM MANICURE TABLE THROUGH DESIGNATED CHASE AND UP THROUGH ROOF. COORDINATE ROOF PENETRATION WITH ROOF MANUFACTURER TO MAINTAIN WARRANTY. REFER TO SHEET M5.3 FOR ADDITIONAL INFORMATION.
 - 4 FURNISH AND INSTALL DRYER VENT CAP THAT MEETS OR EXCEEDS FAMCO WEBB. MOUNT VENT CAP 20" ABOVE GROUND. DO NOT USE SCREEN, LOUVERS, OR CAPS ON OUTSIDE OPENING OF EXHAUST DUCT. REFER TO MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR ALL REQUIREMENTS.
 - 5 FURNISH AND INSTALL INSULATED BACK PLATE FOR THERMOSTAT.
 - 6 FURNISH AND INSTALL EGG CRATE GRILLE FOR TRANSFER AIR. EGG CRATE GRILLE SHALL BE PRICE: 800/TSF (24" X 24").
 - 7 FURNISH AND INSTALL SIDEWALL SUPPLY GRILLE FOR TRANSFER AIR. SIDEWALL GRILLE SHALL BE PRICE: 520D/F/S (22" X 18"). MOUNT SIDEWALL SUPPLY GRILLE 10'-8" AFF TO BOTTOM OF GRILLE. COORDINATE GRILLE MOUNTING HEIGHT WITH OTHER TRADES TO AVOID ANY CONFLICTS.
 - 8 MOUNT HANGING FUME ARM: FA-0405-H ON STANCHION WITH BRACKET TYPE 4" IN LOCATION SHOWN. REFER TO MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR ALL RECOMMENDED CLEARANCES.
 - 9 FURNISH AND INSTALL ROOF EXHAUST FAN (REF-2) IN LOCATION SHOWN. ROOF EXHAUST FAN SHALL BE GREENHECK: CUBE-140-Z, 120 VOLT, 1-PHASE, 3/4 HP. FAN TO PROVIDE 1,275 CFM AT 1.75" ESP. PROVIDE WITH DUCT, 12" ROOF CURB, BACK DRAFT DAMPER, AND BIRD SCREEN. COORDINATE ROOF PENETRATION WITH ROOF MANUFACTURER TO MAINTAIN ROOF WARRANTY.

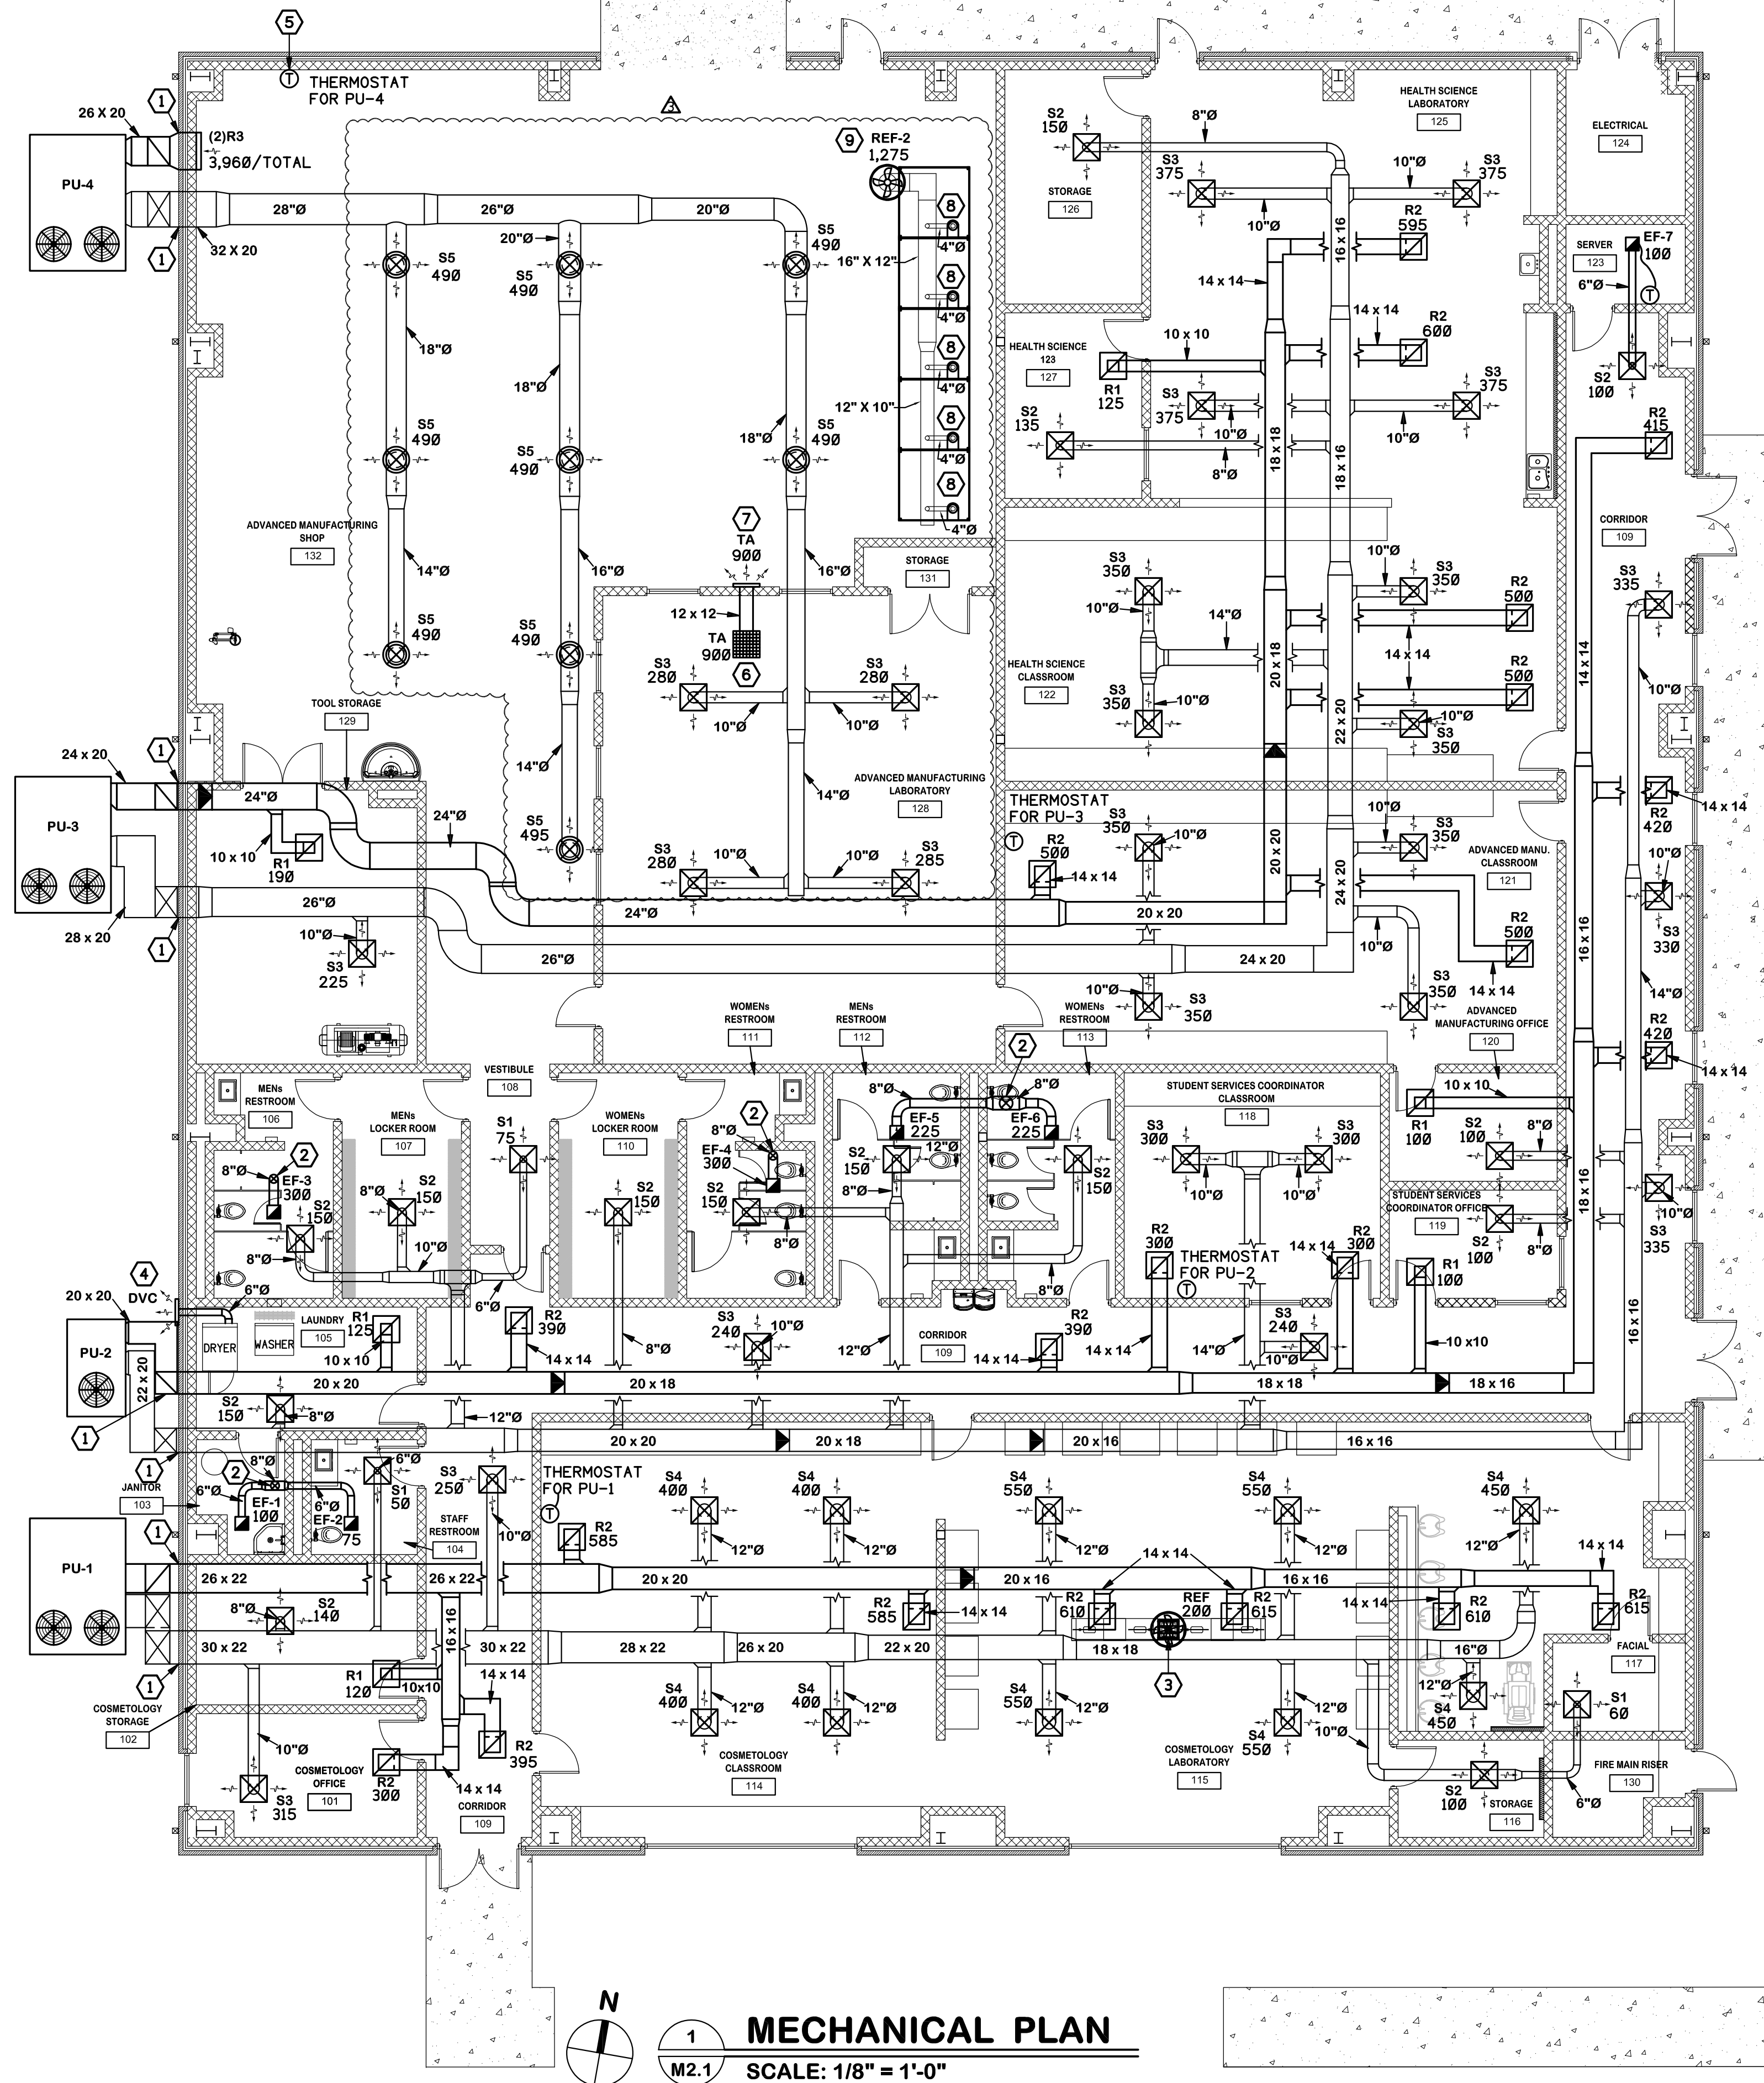

1 MECHANICAL PLAN
M2.1 SCALE: 1/8" = 1'-0"

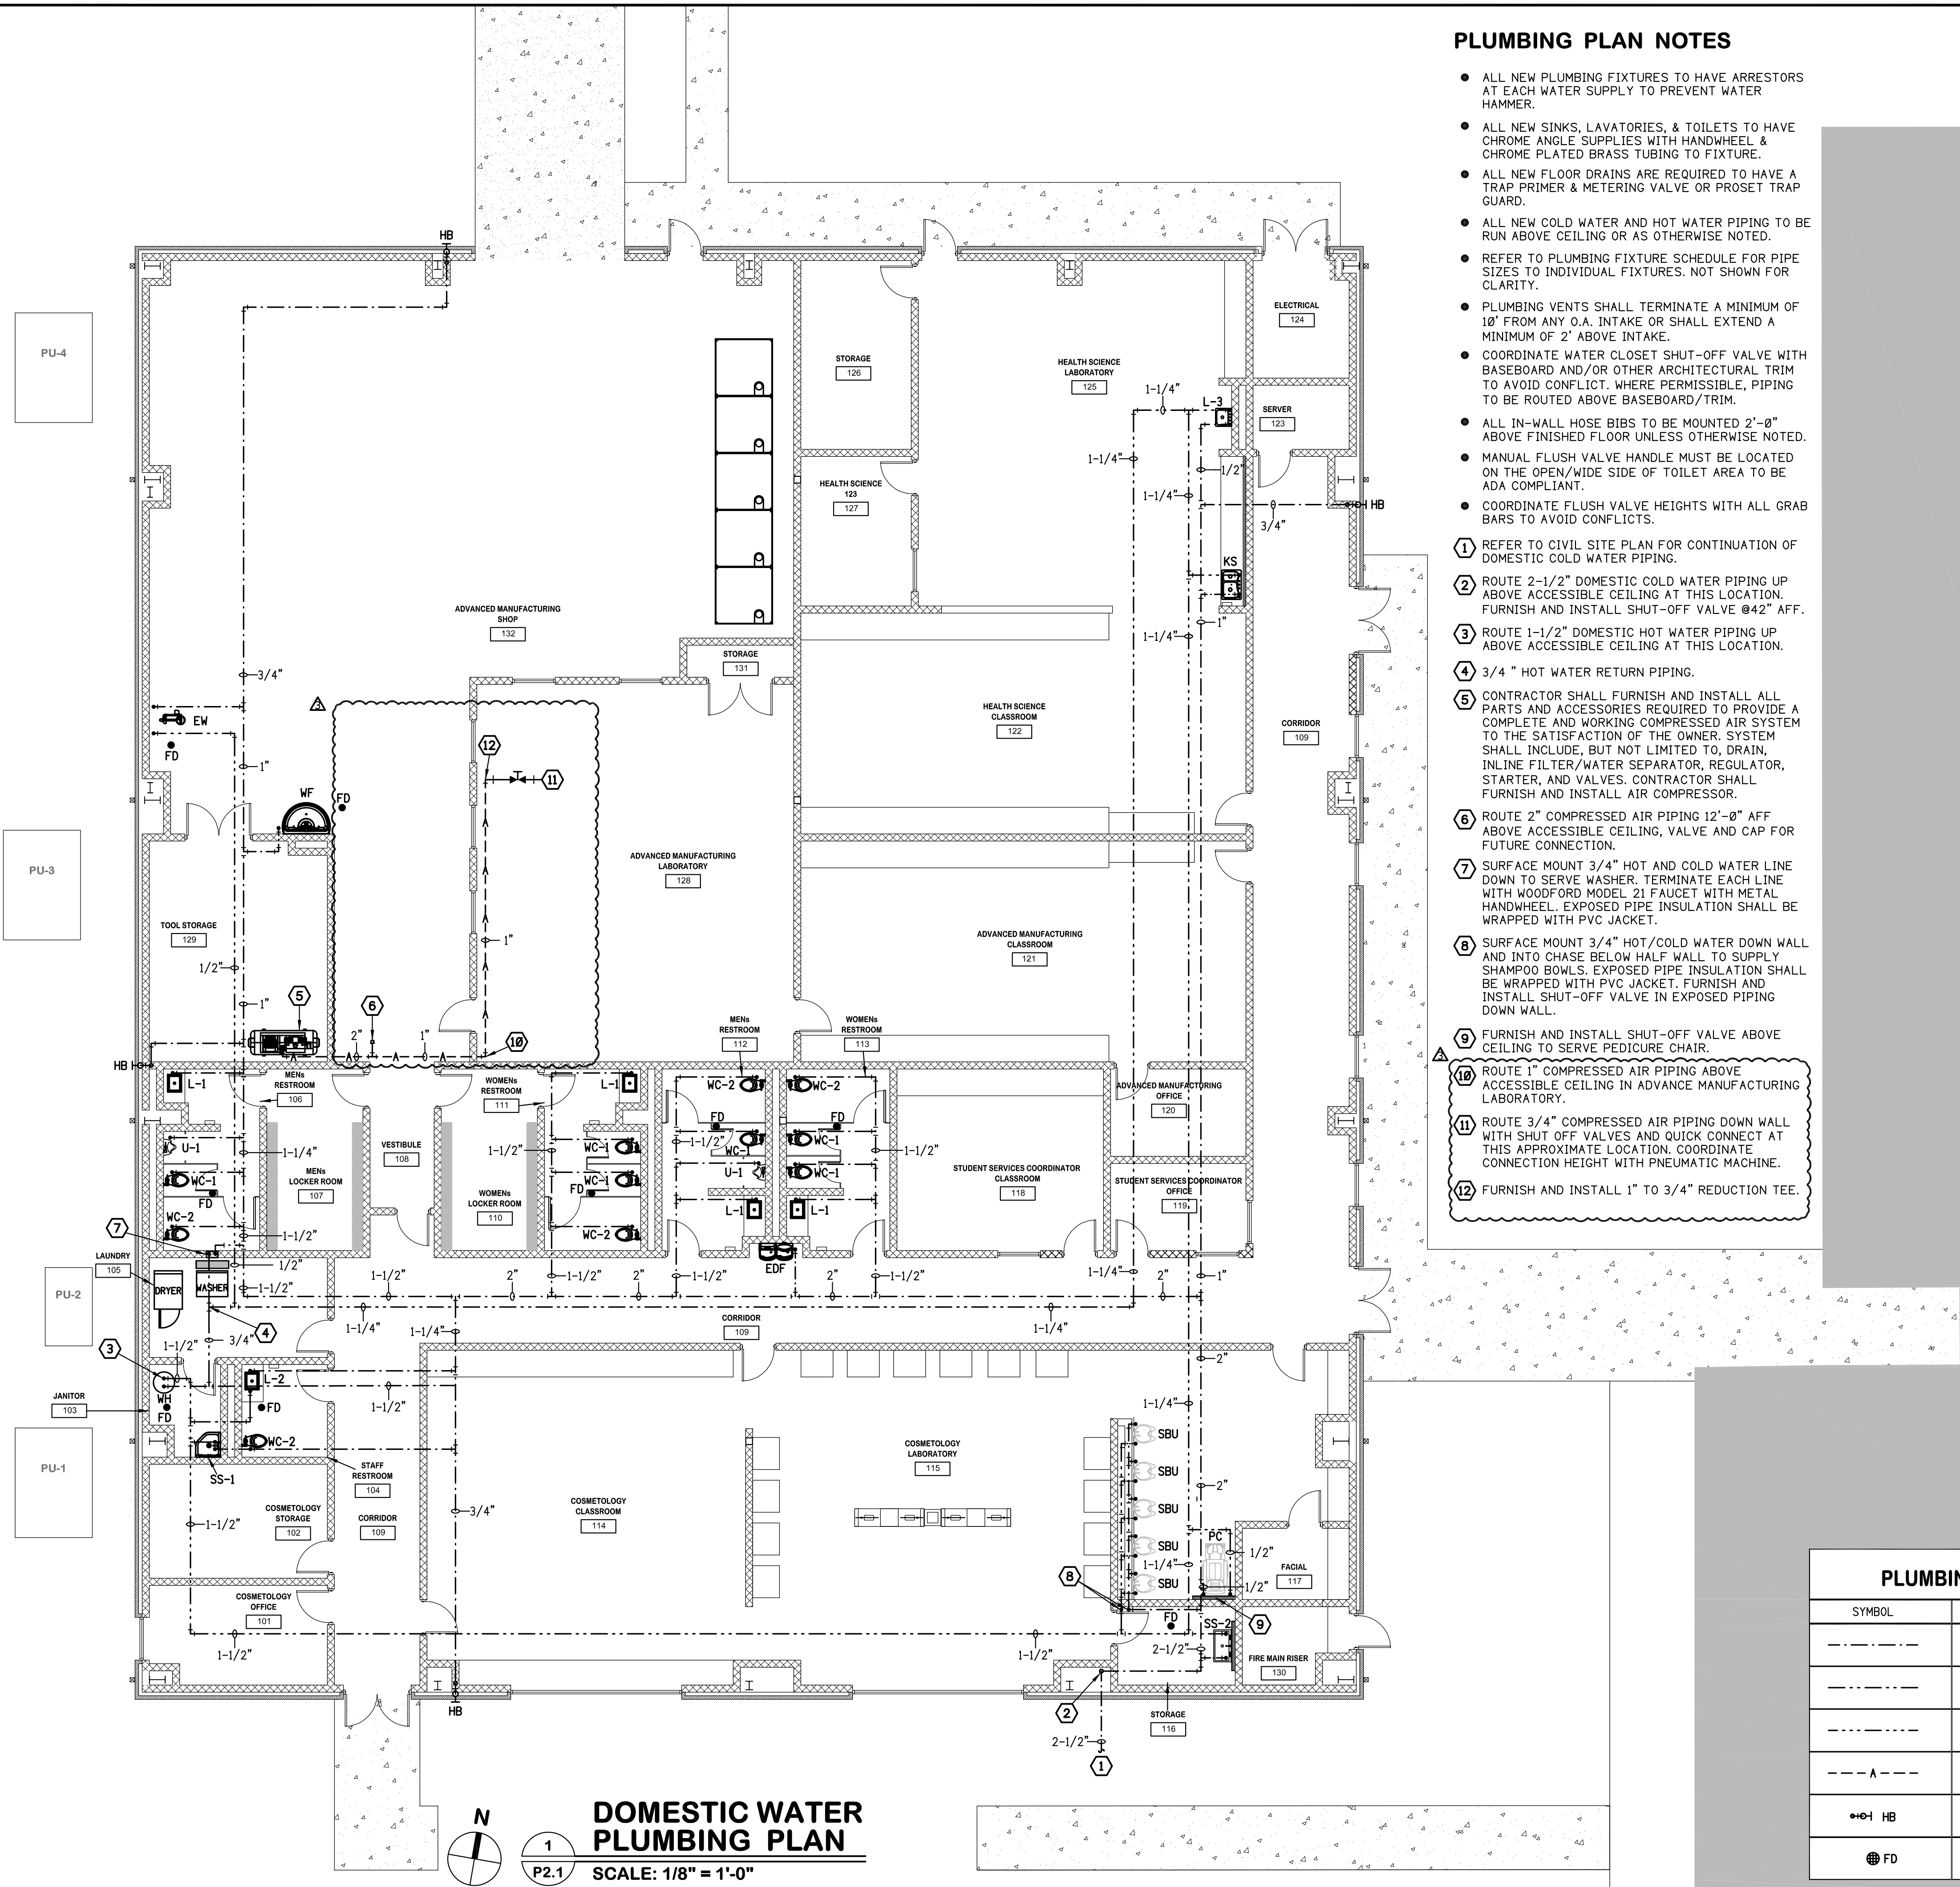

PLUMBING PLAN NOTES

- ALL NEW PLUMBING FIXTURES TO HAVE ARRESTORS AT EACH WATER SUPPLY TO PREVENT WATER HAMMER.
- ALL NEW SINKS, LAVATORIES, & TOILETS TO HAVE CHROME ANGLE SUPPLIES WITH HANDWHEEL & CHROME PLATED BRASS TUBING TO FIXTURE.
- ALL NEW FLOOR DRAINS ARE REQUIRED TO HAVE A TRAP PRIMER & METERING VALVE OR PROSET TRAP GUARD.
- ALL NEW COLD WATER AND HOT WATER PIPING TO BE RUN ABOVE CEILING OR AS OTHERWISE NOTED.
- REFER TO PLUMBING FIXTURE SCHEDULE FOR PIPE SIZES TO INDIVIDUAL FIXTURES. NOT SHOWN FOR CLARITY.
- PLUMBING VENTS SHALL TERMINATE A MINIMUM OF 10' FROM ANY O.A. INTAKE OR SHALL EXTEND A MINIMUM OF 2' ABOVE INTAKE.
- COORDINATE WATER CLOSET SHUT-OFF VALVE WITH BASEBOARD AND/OR OTHER ARCHITECTURAL TRIM TO AVOID CONFLICT. WHERE PERMISSIBLE, PIPING TO BE ROUTED ABOVE BASEBOARD/TRIM.
- ALL IN-WALL HOSE BIBS TO BE MOUNTED 2'-0" ABOVE FINISHED FLOOR UNLESS OTHERWISE NOTED.
- MANUAL FLUSH VALVE HANDLE MUST BE LOCATED ON THE OPEN/WIDE SIDE OF TOILET AREA TO BE ADA COMPLIANT.
- COORDINATE FLUSH VALVE HEIGHTS WITH ALL GRAB BARS TO AVOID CONFLICTS.


- 1 REFER TO CIVIL SITE PLAN FOR CONTINUATION OF DOMESTIC COLD WATER PIPING.
- 2 ROUTE 2-1/2" DOMESTIC COLD WATER PIPING UP ABOVE ACCESSIBLE CEILING AT THIS LOCATION. FURNISH AND INSTALL SHUT-OFF VALVE @42" AFF.
- 3 ROUTE 1-1/2" DOMESTIC HOT WATER PIPING UP ABOVE ACCESSIBLE CEILING AT THIS LOCATION.
- 4 3/4" HOT WATER RETURN PIPING.
- 5 CONTRACTOR SHALL FURNISH AND INSTALL ALL PARTS AND ACCESSORIES REQUIRED TO PROVIDE A COMPLETE AND WORKING COMPRESSED AIR SYSTEM TO THE SATISFACTION OF THE OWNER. SYSTEM SHALL INCLUDE, BUT NOT LIMITED TO, DRAIN, INLINE FILTER/WATER SEPARATOR, REGULATOR, STARTER, AND VALVES. CONTRACTOR SHALL FURNISH AND INSTALL AIR COMPRESSOR.
- 6 ROUTE 2" COMPRESSED AIR PIPING 12'-0" AFF ABOVE ACCESSIBLE CEILING. VALVE AND CAP FOR FUTURE CONNECTION.
- 7 SURFACE MOUNT 3/4" HOT AND COLD WATER LINE DOWN TO SERVE WASHER. TERMINATE EACH LINE WITH WOODFORD MODEL 21 FAUCET WITH METAL HANDWHEEL. EXPOSED PIPE INSULATION SHALL BE WRAPPED WITH PVC JACKET.
- 8 SURFACE MOUNT 3/4" HOT/COLD WATER DOWN WALL AND INTO CHASE BELOW HALF WALL TO SUPPLY SHAMPOO BOWLS. EXPOSED PIPE INSULATION SHALL BE WRAPPED WITH PVC JACKET. FURNISH AND INSTALL SHUT-OFF VALVE IN EXPOSED PIPING DOWN WALL.
- 9 FURNISH AND INSTALL SHUT-OFF VALVE ABOVE CEILING TO SERVE PEDICURE CHAIR.
- 10 ROUTE 1" COMPRESSED AIR PIPING ABOVE ACCESSIBLE CEILING IN ADVANCE MANUFACTURING LABORATORY.
- 11 ROUTE 3/4" COMPRESSED AIR PIPING DOWN WALL WITH SHUT OFF VALVES AND QUICK CONNECT AT THIS APPROXIMATE LOCATION. COORDINATE CONNECTION HEIGHT WITH PNEUMATIC MACHINE.
- 12 FURNISH AND INSTALL 1" TO 3/4" REDUCTION TEE.

PLUMBING LEGEND

SYMBOL	DESCRIPTION
---	DOMESTIC COLD WATER SUPPLY PIPING
----	DOMESTIC HOT WATER SUPPLY PIPING
----	DOMESTIC HOT WATER RETURN PIPING
---	COMPRESSED AIR SUPPLY PIPING
HB	HOSE BIBB
FD	FLOOR DRAIN

DOMESTIC WATER PLUMBING PLAN


SCALE: 1/8" = 1'-0"

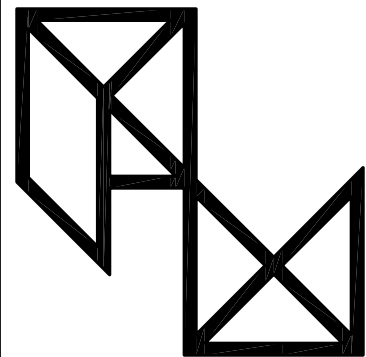

PryorMorrow

Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
A	AUGUST 16, 2024	ADDENDUM No. 3

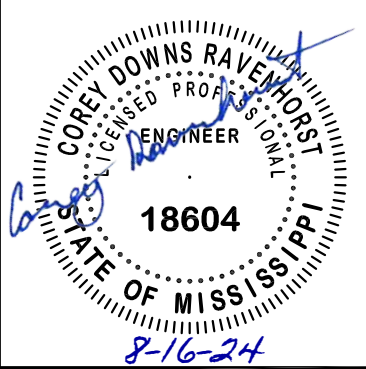


PROJECT NO.	2023111
DRAWN BY:	RDH
CHECKED BY:	CDR

Copyright © 2024
PryorMorrow PC

DOMESTIC WATER PLUMBING PLAN

P2.1

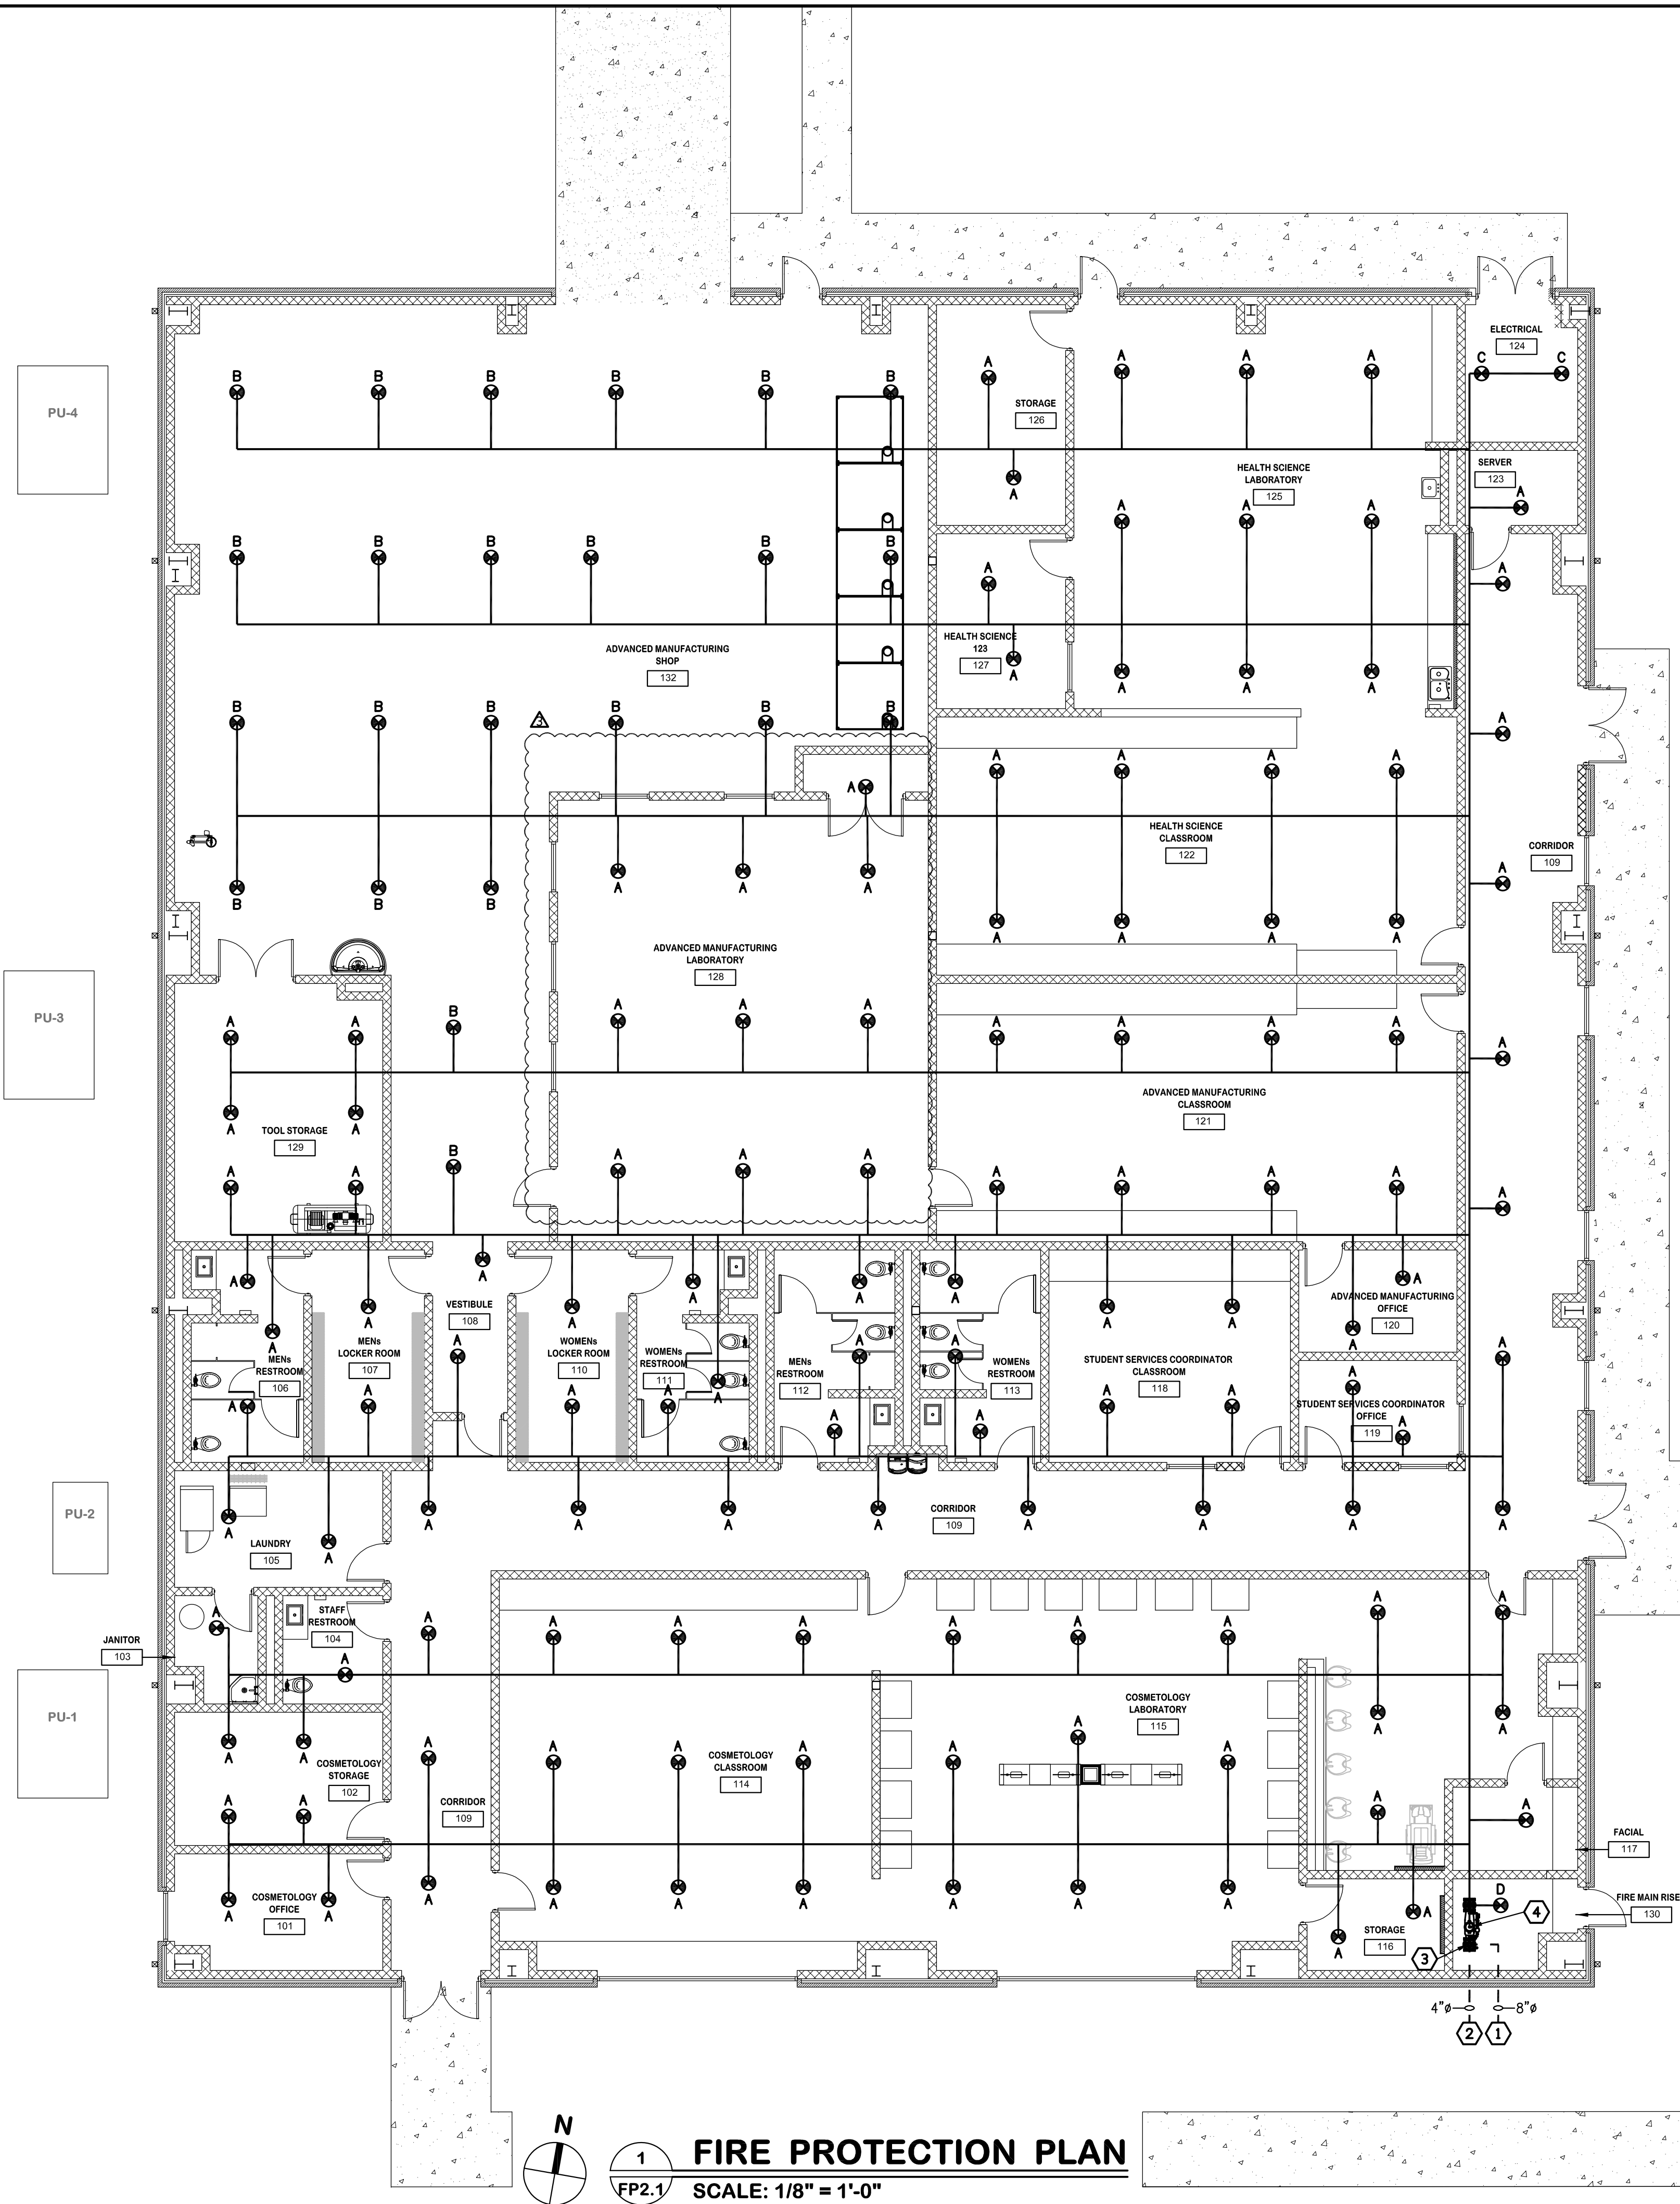


FIRE SPRINKLER PLAN NOTES

- COORDINATE SPRINKLER PIPE ROUTING WITH OTHER TRADES ABOVE CEILING TO AVOID CONFLICTS. PIPING SHALL BE ROUTED AS HIGH AS POSSIBLE. SLOPE FOR OPTIMAL DRAINAGE.
 - SPRINKLER HEADS LOCATED IN LAY-IN CEILINGS SHALL BE CENTERED IN CEILING TILE.
 - SYSTEM TO BE DESIGNATED AND INSTALLED PER N.F.P.A STANDARD AND CONTRACT SPECIFICATION.
 - HANGERS TO BE PER N.F.P.A#13 AND F.M.
 - PIPE SIZING BASED ON HYDRAULIC CALCULATIONS PER N.F.P.A.#13 STANDARD. SCHEDULE 10 NOT ALLOWED.
 - ALL MAIN (GROOVED) AND LINE (THREADED) FITTINGS TO BE PER N.F.P.A. STANDARD.
 - ALL ELECTRICAL WIRING FOR FLOW AND TAMPER SWITCHES TO BE EXECUTED BY DIVISION 26/28.
 - SPRINKLER HEAD SPACING NOT TO BE EXCEED MAXIMUM COVERAGE AS LISTED IN N.F.P.A#13 BASED ON OCCUPANCY HAZARD.
 - PROVIDE 1" AUXILIARY DRAIN FOR SPRINKLERS SYSTEM WHERE REQUIRED AND NEEDED TO PROPERLY DRAIN SYSTEM. PROVIDE SHUT OFF ABOUT FINISHED CEILING, LOCK IN NORMAL POSITION, AND LABEL VALVE LOCATION. PROVIDE SPLASH BLOCK AT DISCHARGE. COORDINATE DISCHARGE ROUTING WITH OTHER TRADES TO AVOID CONFLICT.
 - COORDINATE FIRE SPRINKLER HEAD COLOR WITH CEILING COLOR/INTERIOR DESIGNER UNLESS OTHERWISE NOTED.
- SEE CIVIL SITE PLAN FOR FIRE MAIN PIPING CONTINUATION.
 - ROUTE PIPING TO FIRE DEPARTMENT CONNECTIONS. REFER TO CIVIL PLANS.
 - CONNECT 8" FIRE MAIN PIPING TO FIRE MAN RISER BELOW SLAB.
 - ROUTE FIRE SPRINKLER PIPING ABOVE ACCESSIBLE CEILING AT THIS APPROXIMATE LOCATION.

FIRE PROTECTION: NEW

SYMBOL	DESCRIPTION
—	FIRE MAIN SUPPLY PIPING (WET)
- - - -	FIRE MAIN SUPPLY PIPING UNDER GROUND (WET)
⊗ ^A	155°F, QUICK RESPONSE, STANDARD COVERAGE, CONCEALED HEAD
⊗ ^B	155°F, QUICK RESPONSE, STANDARD COVERAGE, UPRIGHT, WIRE GUARD
⊗ ^C	200°F, QUICK RESPONSE, STANDARD COVERAGE, CONCEALED HEAD
⊗ ^D	200°F, QUICK RESPONSE, STANDARD COVERAGE, UPRIGHT, WIRE GUARD

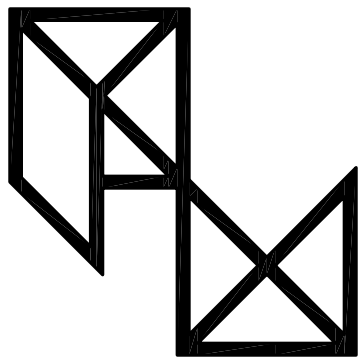

PryorMorrow

Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
Δ	AUGUST 16, 2024	ADDENDUM No. 3




PROJECT NO.	2023111
DRAWN BY:	RDH
CHECKED BY:	CDR

Copyright © 2024
PryorMorrow PC

FIRE PROTECTION PLAN


FP2.1

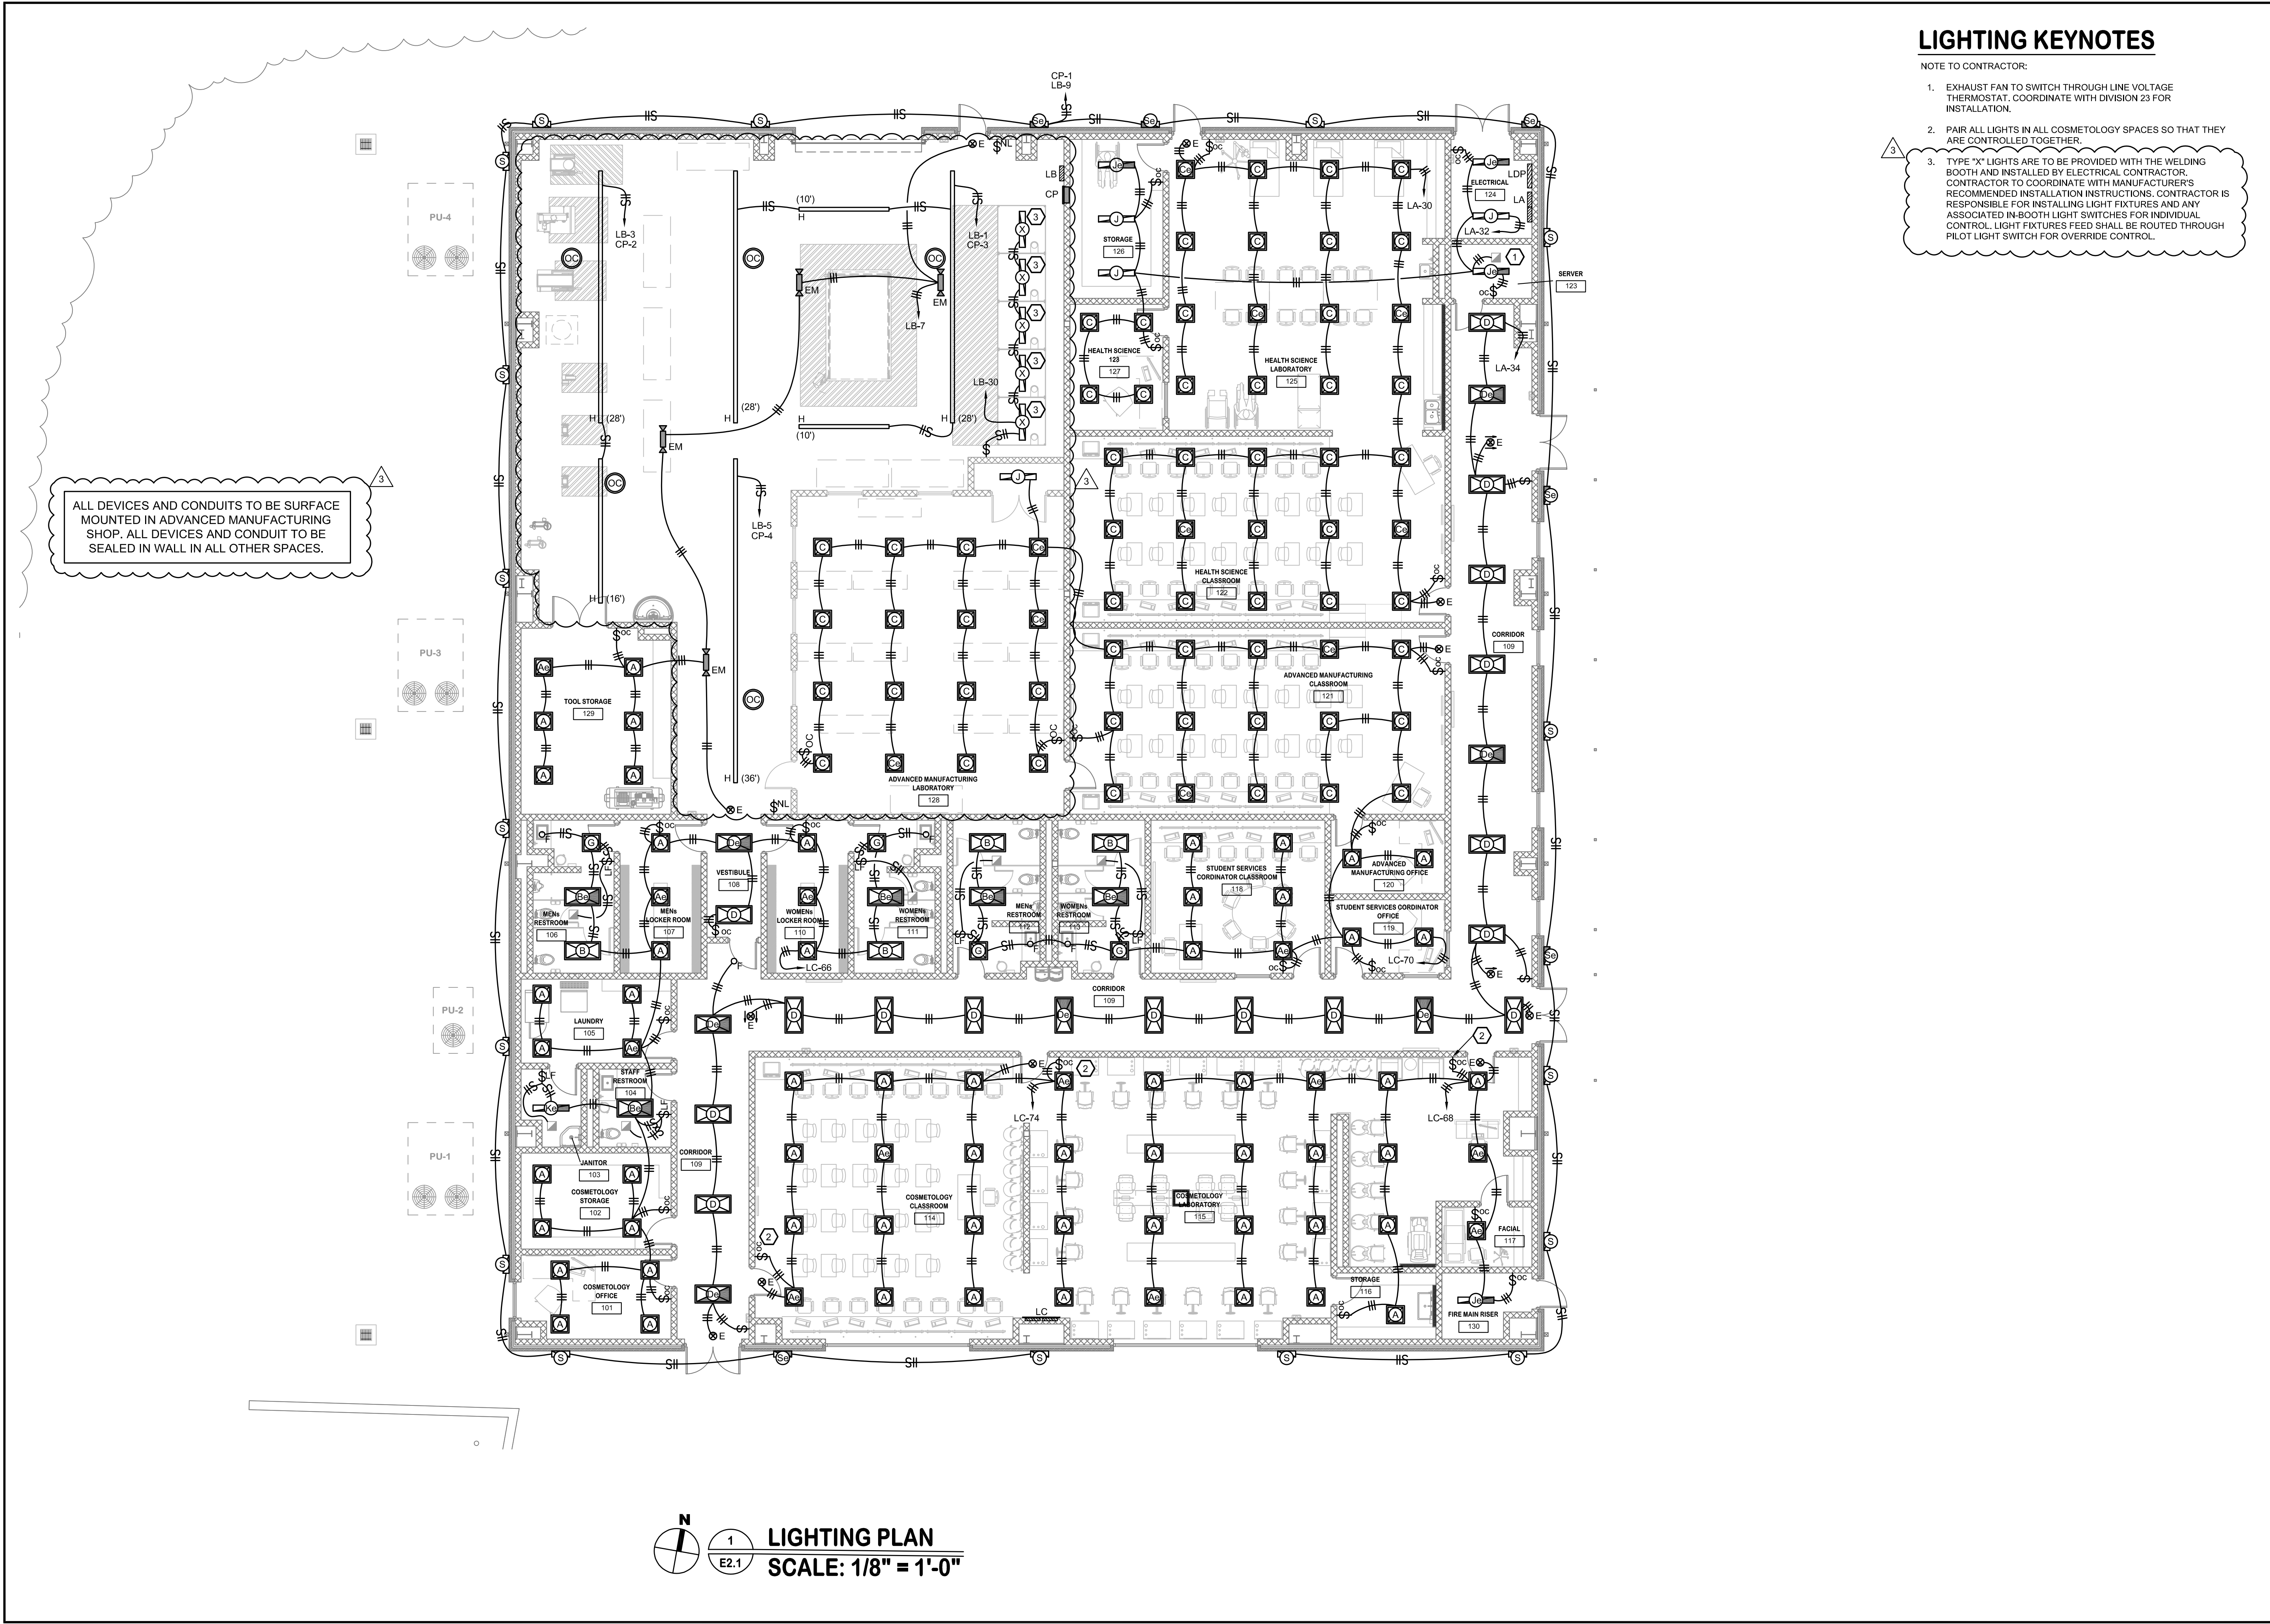

LIGHTING KEYNOTES

NOTE TO CONTRACTOR:


1. EXHAUST FAN TO SWITCH THROUGH LINE VOLTAGE THERMOSTAT. COORDINATE WITH DIVISION 23 FOR INSTALLATION.
2. PAIR ALL LIGHTS IN ALL COSMETOLOGY SPACES SO THAT THEY ARE CONTROLLED TOGETHER.
3. TYPE "X" LIGHTS ARE TO BE PROVIDED WITH THE WELDING BOOTH AND INSTALLED BY ELECTRICAL CONTRACTOR. CONTRACTOR TO COORDINATE WITH MANUFACTURER'S RECOMMENDED INSTALLATION INSTRUCTIONS. CONTRACTOR IS RESPONSIBLE FOR INSTALLING LIGHT FIXTURES AND ANY ASSOCIATED IN-BOOTH LIGHT SWITCHES FOR INDIVIDUAL CONTROL. LIGHT FIXTURES FEED SHALL BE ROUTED THROUGH PILOT LIGHT SWITCH FOR OVERRIDE CONTROL.

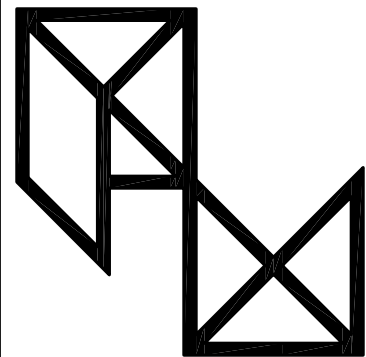

PryorMorrow

Addition at Career and Technical Center Itawamba County School District Itawamba County (Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
Δ	AUGUST 16, 2024	ADDENDUM No. 3

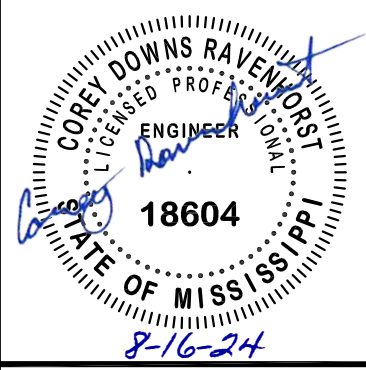

PROJECT NO.	2023111
DRAWN BY:	JWF
CHECKED BY:	CDR

Copyright © 2024
PryorMorrow PC

ELECTRICAL:
-LIGHTING PLAN



E2.1

POWER KEYNOTES


NOTE TO CONTRACTOR:

- POWER CONNECTION TO NURSE HEADWALL UNIT. COORDINATE LOCATION AND REQUIREMENTS WITH EQUIPMENT MANUFACTURER PRIOR TO ROUGH-IN.
- LOCATE FLOOR BOX FOR MANICURE TABLES PER EQUIPMENT DRAWINGS. REFER TO PRODUCT DRAWINGS PRIOR TO ROUGH-IN AND PROVIDE ALL POWER CONNECTIONS AS REQUIRED BY THE MANUFACTURER. PROVIDE SWITCH FOR EACH RECEPTACLE ON COLUMN BETWEEN TABLES.
- RECEPTACLE FOR POWER CONNECTION TO WATER HEATER. PROVIDE MOTOR RATED SWITCH ADJACENT UNIT FOR POWER TO PUMP. COORDINATE LOCATION AND REQUIREMENTS WITH PLUMBING CONTRACTOR.
- POWER CONNECTION TO AIR COMPRESSOR. PROVIDE 100A/3P/NF DISCONNECT IN A NEMA 1 ENCLOSURE ADJACENT UNIT.
- POWER CONNECTION TO PACKAGE UNIT (PU-#), PROVIDE 100A/3P/NF DISCONNECT IN A NEMA 3R ENCLOSURE ADJACENT UNIT. COORDINATE LOCATION AND REQUIREMENTS WITH MECHANICAL CONTRACTOR.
- COORDINATE RECEPTACLE ROUGH-IN WITH HALF WALL. REFER TO ARCHITECTURAL PLANS.
- PROVIDE POWER CONNECTION THROUGH FACTORY INSTALLED DISCONNECT ON ROOF MOUNTED EXHAUST FAN. CIRCUIT THROUGH OCCUPANCY SENSOR AS INDICATED.
- POWER CONNECTION FOR CLOTHES DRYER. PROVIDE 100A/3P/NF DISCONNECT IN A NEMA 1 ENCLOSURE ADJACENT DRYER.
- PANEL LB SHALL BE PROVIDED WITH A SHUNT TRIP BREAKER. A SURFACE MOUNTED EMERGENCY OFF BUTTON SHALL BE PROVIDED AND INSTALLED AT LOCATION INDICATED. CONTRACTOR SHALL PROVIDE ALL RELAYS/CONTACTORS, WIRING AND ADDITIONAL CIRCUITRY AS REQUIRED FOR A COMPLETE AND OPERATIONAL SYSTEM.
- POWER CONNECTION TO INDUSTRIAL TRAINING CENTER. PROVIDE 20A L21-20 RECEPTACLE AS INDICATED. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO PNEUMATIC TRAINING STATION. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO HYDRAULIC WORKSTATION. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO CONVEYOR TRAINING STATION. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO ROBOTICS STATION. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- RECEPTACLE FOR BENCH GRINDER. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO BELT SANDER. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO ELECTRICAL TRAINING STATION. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO ELECTRICAL TRAINING STATION. PROVIDE NEMA 18-20R RECEPTACLE AS INDICATED. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO DRILL PRESS. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO BAND SAW. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO MAGNETIC DRILL PRESS. COORDINATE LOCATION AND REQUIREMENTS WITH OWNER'S EQUIPMENT PRIOR TO ROUGH-IN.
- POWER CONNECTION TO FUTURE PLASMA CUTTER. PROVIDE AND INSTALL A 60A/3P/FUSIBLE DISCONNECT WITH 50A SLOW BLOW FUSES AS INDICATED.
- CONTRACTOR TO PROVIDE AND INSTALL 120VAC TO 12VAC, 20W PLU-IN TRANSFORMER FOR FUME ARM LIGHTS. RECEPTACLE TO BE LOCATED AT 18" AFF. CONTRACTOR SHALL BUNDLE LIGHT CABLES AND RUN TO WELDING BOOTHS ACROSS FLOOR WITH CABLE TIES AT NO LESS THAN 18" APART. CONNECT FUME ARM LIGHTS TO TRANSFORMER UTILIZING FACTORY PROVIDED 25' CORD FOR EACH LIGHT. EXTEND LIGHT CABLE AS REQUIRED. COORDINATE WITH MANUFACTURER'S WIRING RECOMMENDATIONS AND INSTALLATION INSTRUCTION FOR INSTALLING THE LIGHT CABLE ALONG THE FUME ARM. TRANSFORMER FEED SHALL BE ROUTED THROUGH PILOT LIGHT SWITCH FOR OVERRIDE CONTROL.
- QUAD RECEPTACLE TO BE MOUNTED AT TYPICAL HEIGHT BELOW DISCONNECTS.
- POWER CONNECTION TO INTEGRAL DISCONNECT ON WELDING BOOTH EXHAUST FAN LOCATED ON ROOF. FAN TO BE CONTROLLED WITH WELDING BOOTH ARM FANS AND LIGHTS. COORDINATE LOCATION AND REQUIREMENTS WITH MECHANICAL CONTRACTOR.

ALL DEVICES AND CONDUITS TO BE SURFACE MOUNTED IN ADVANCED MANUFACTURING SHOP. ALL DEVICES AND CONDUIT TO BE SEALED IN WALL IN ALL OTHER SPACES.

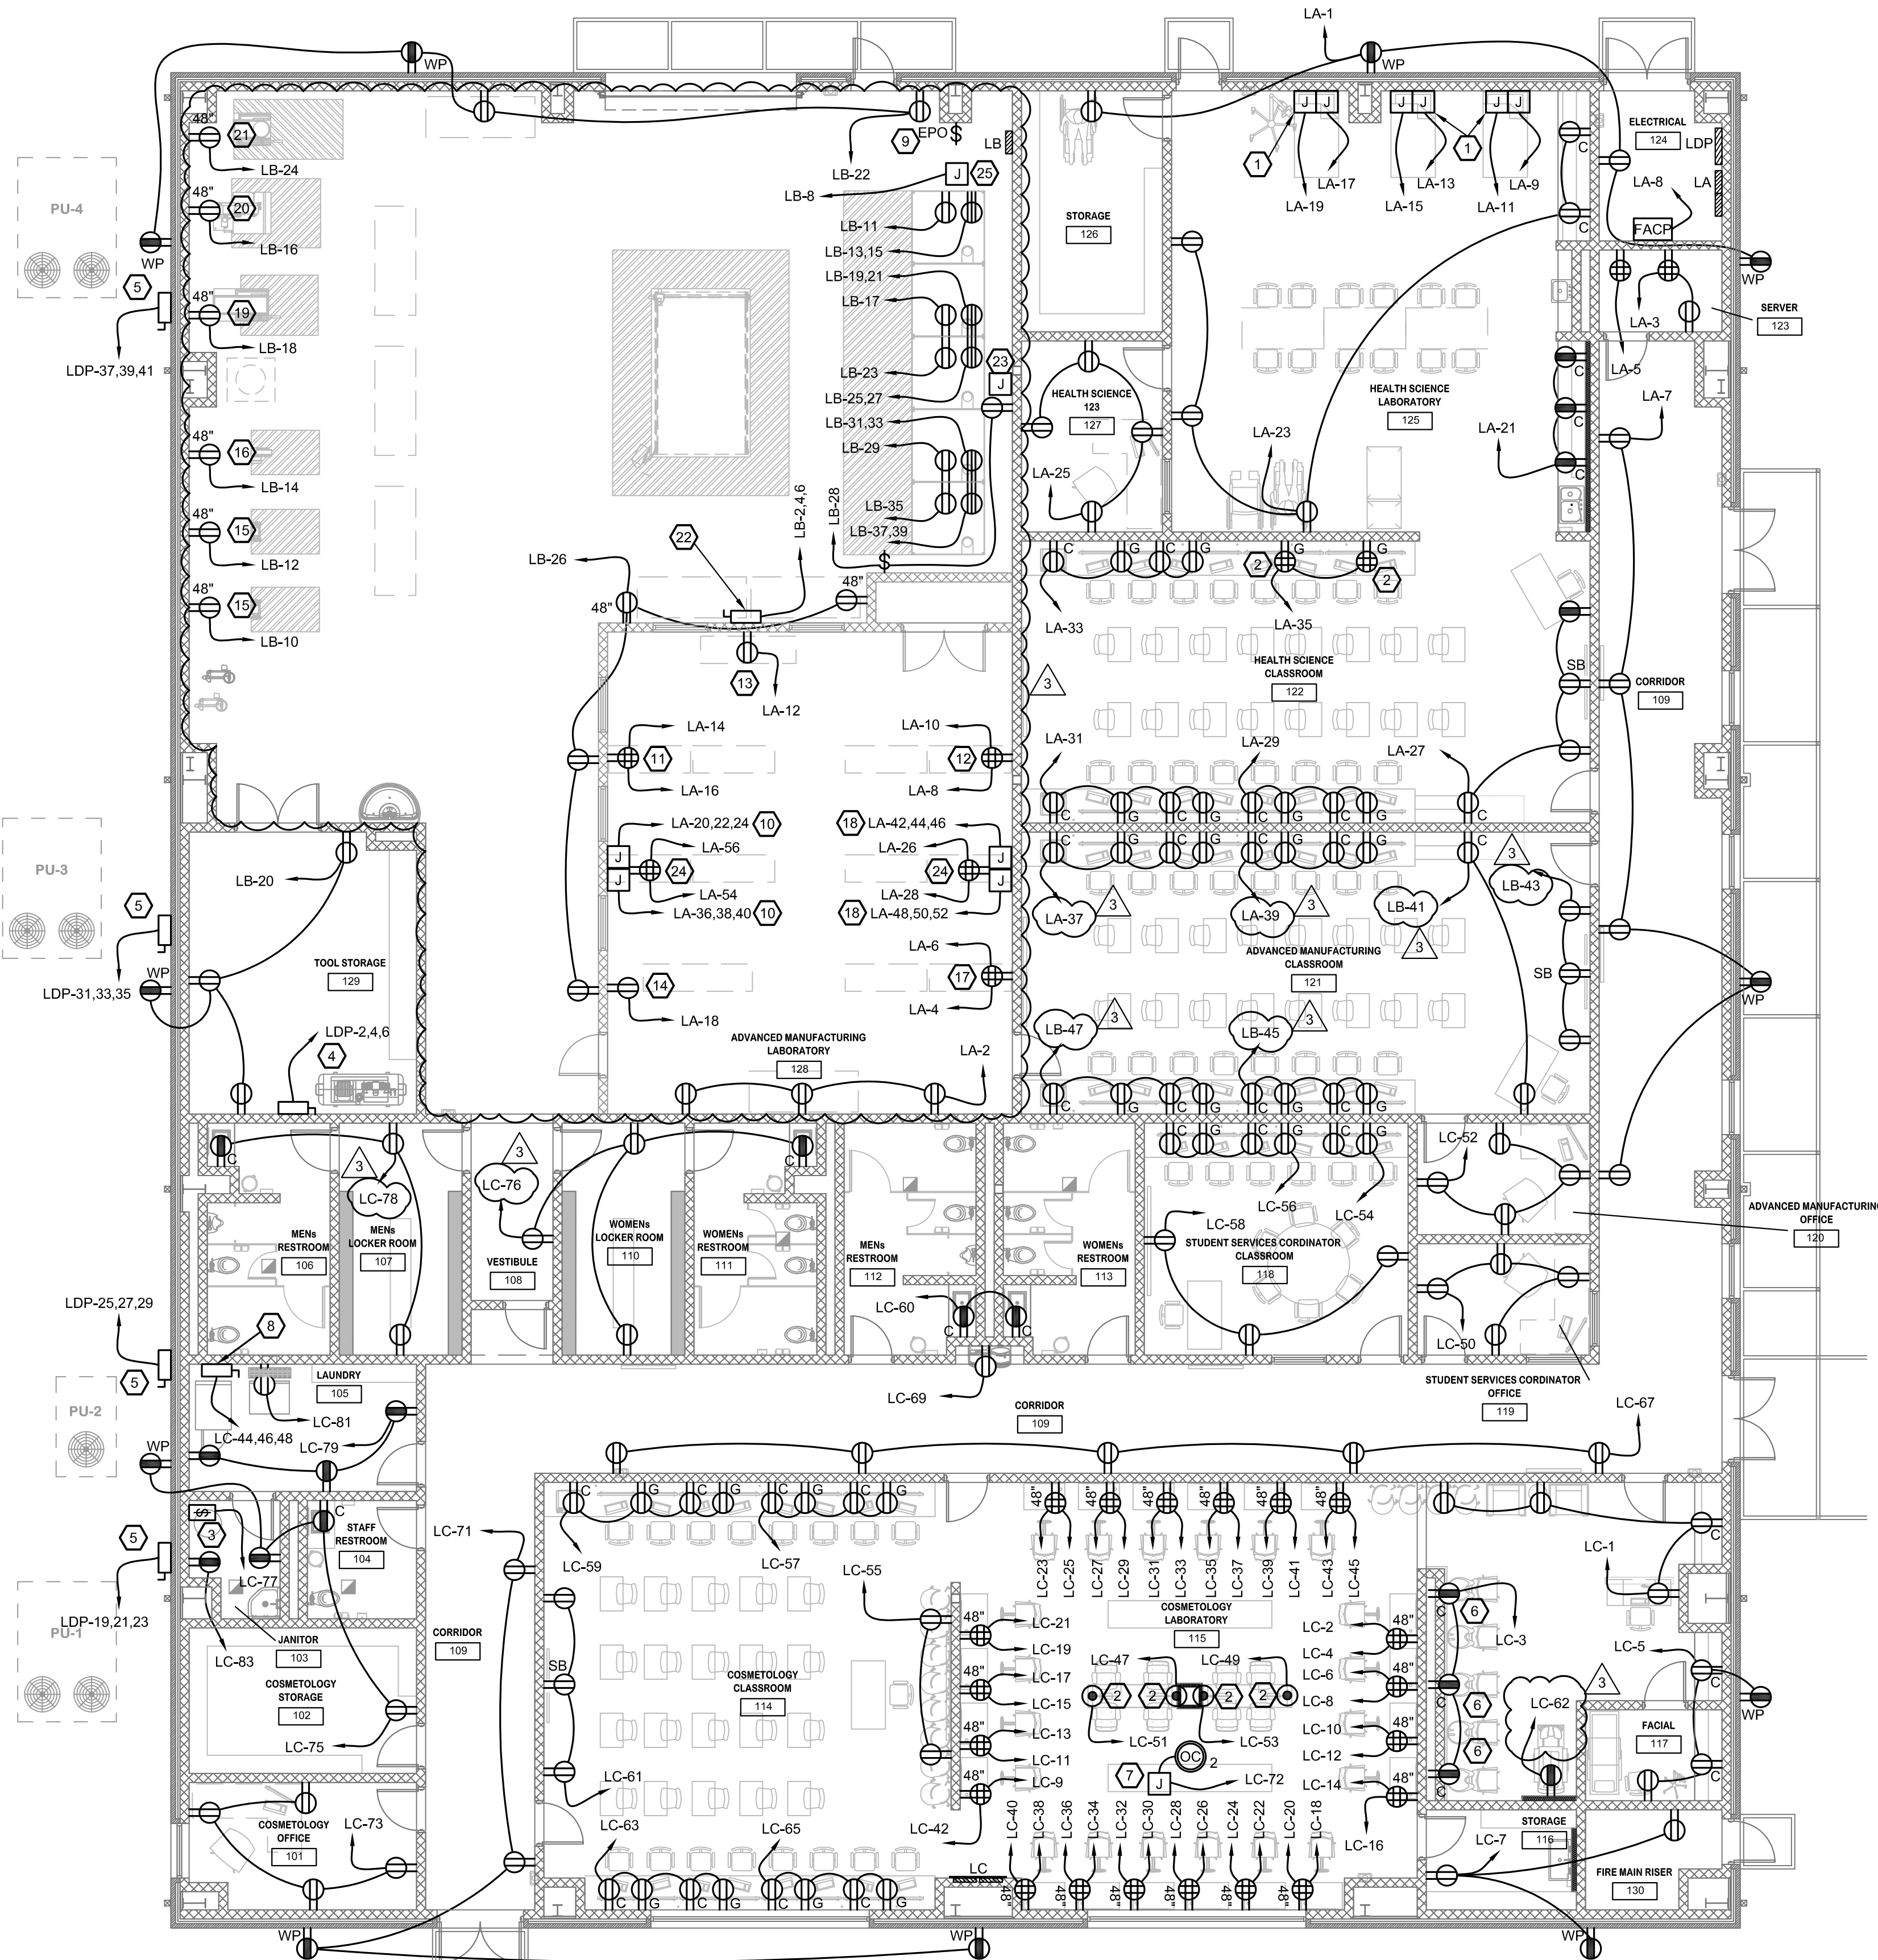


POWER PLAN
SCALE: 1/8" = 1'-0"

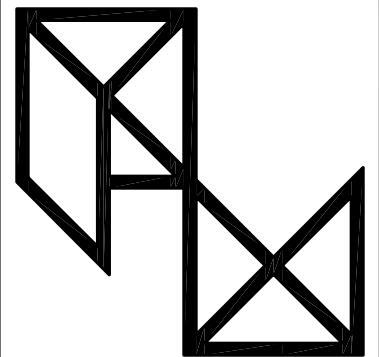

Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2024	ADDENDUM No. 3

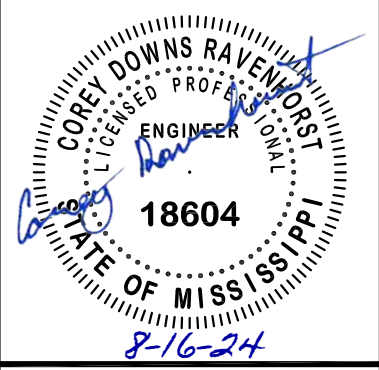

PROJECT NO.	2023111
DRAWN BY:	JWF
CHECKED BY:	CDR

Copyright © 2024
PryorMorrow PC

ELECTRICAL:
-POWER PLAN


E3.1

NOTE TO CONTRACTOR:

-

Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
<u>Δ</u>	AUGUST 16, 2024	ADDENDUM No. 3



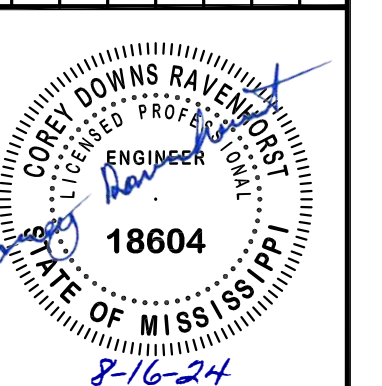


PROJECT NO.	2023111
DRAWN BY:	JWF
CHECKED BY:	CDR


Copyright © 2024
PryorMorrow PC

ELECTRICAL:
-SYSTEMS PLAN

E4.1

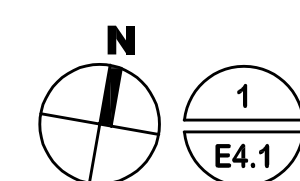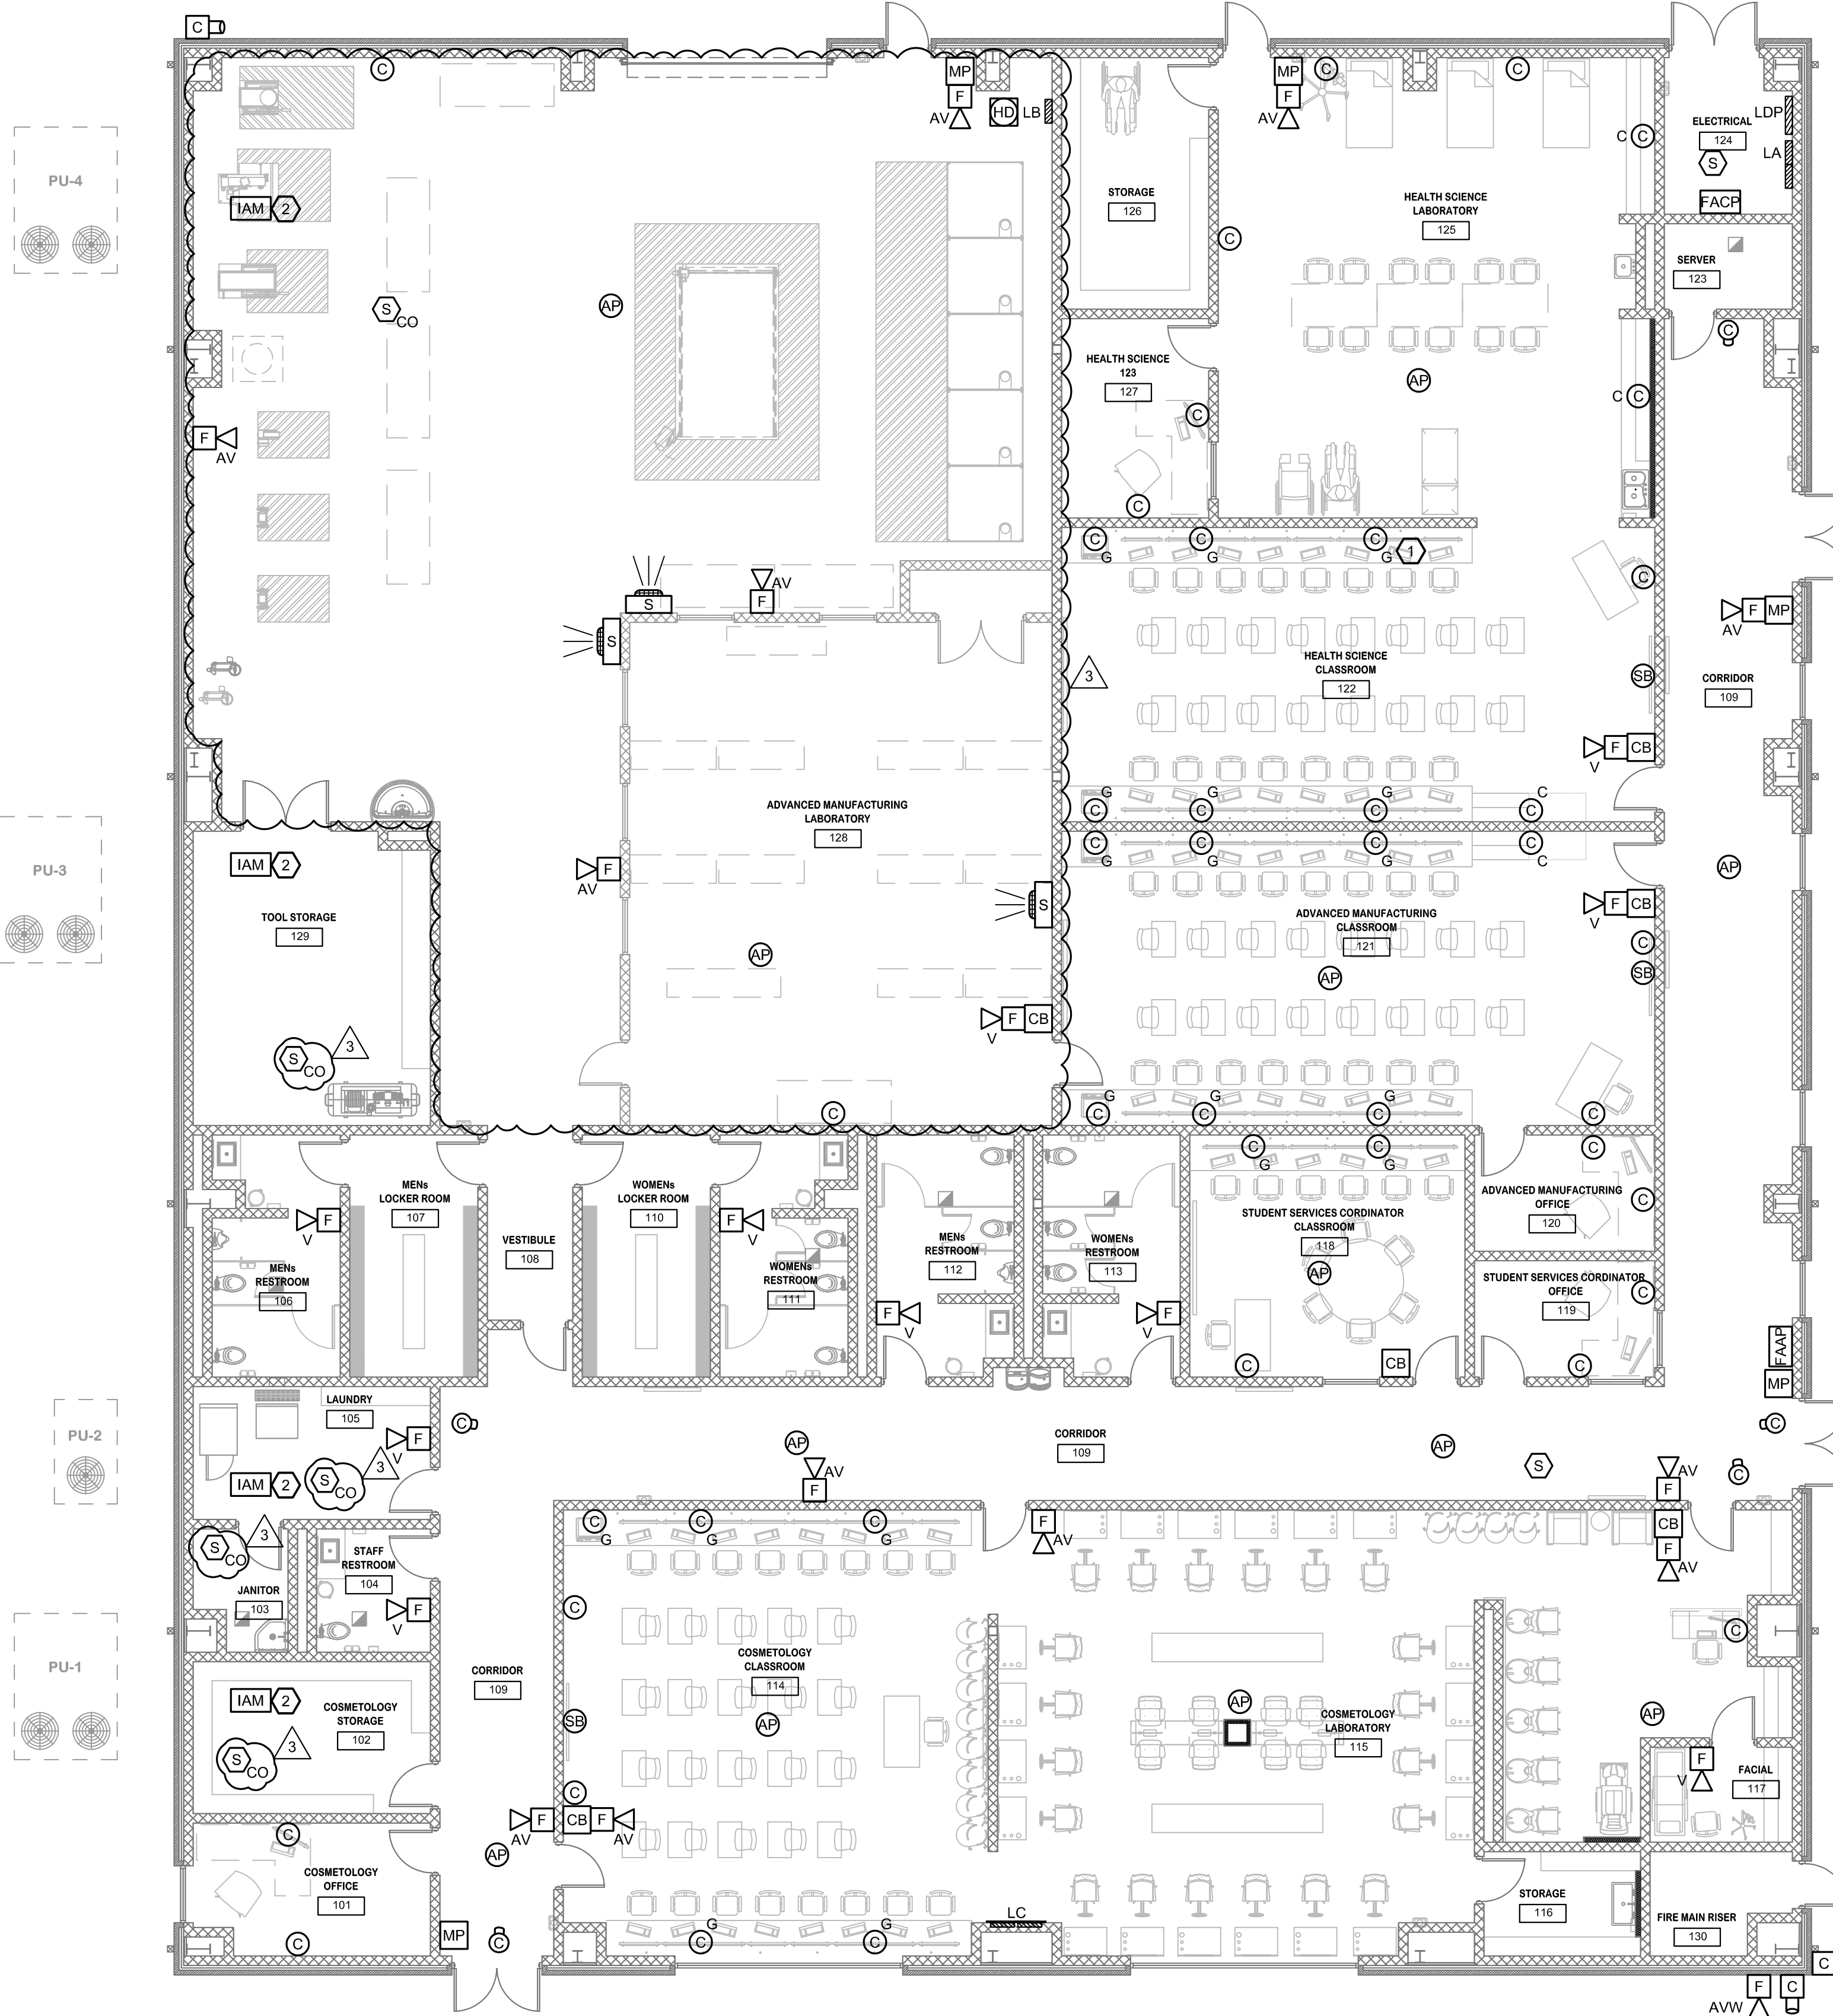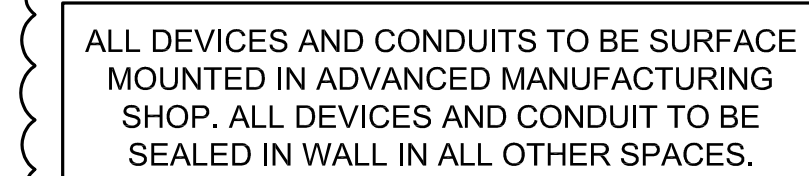


SYSTEMS PLAN
SCALE: 1/8" = 1'-0"

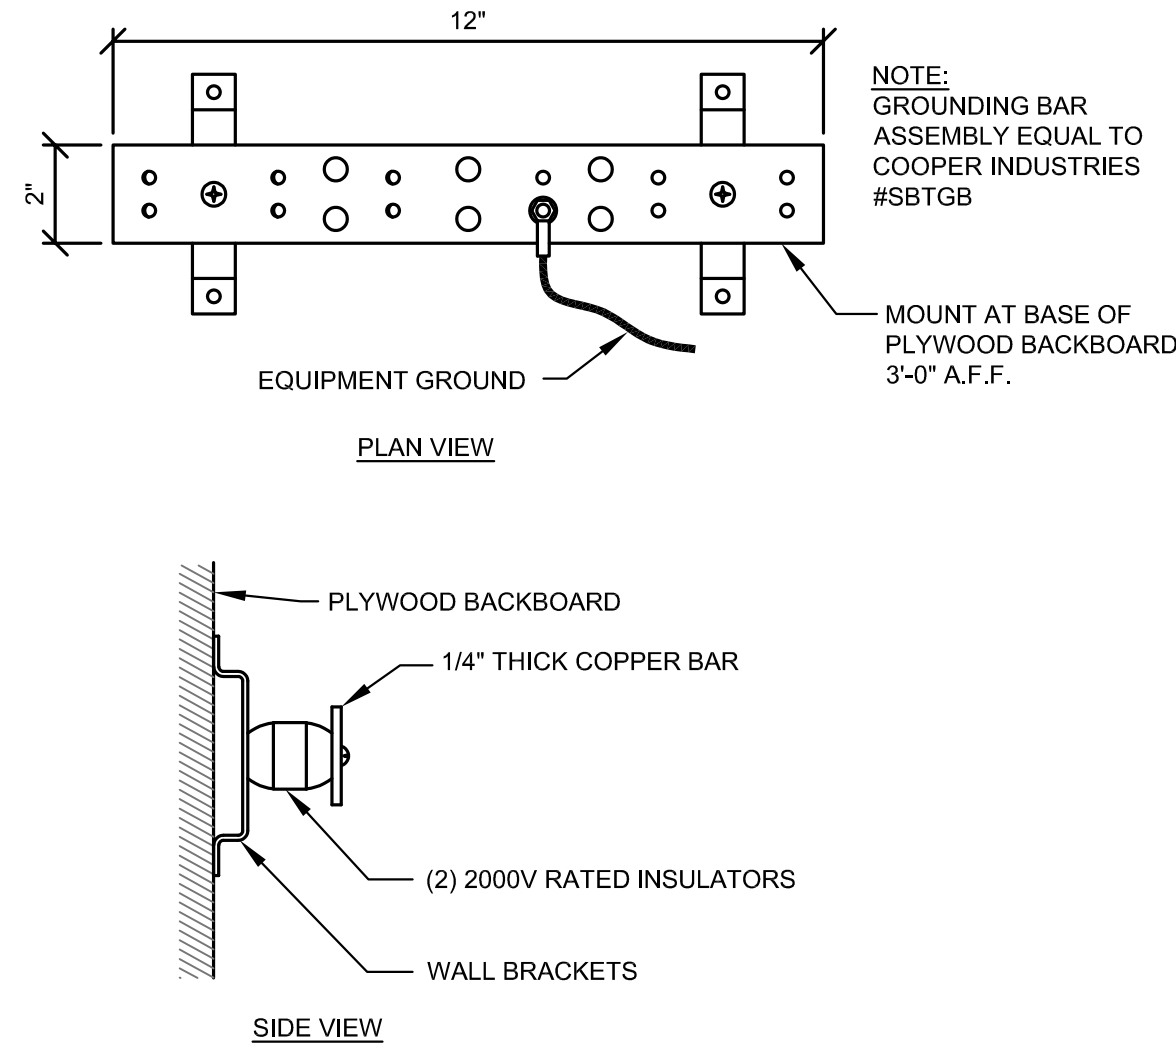


1
E5.1
N.T.S.

TELECOMMUNICATIONS
GROUNDING BAR DETAIL

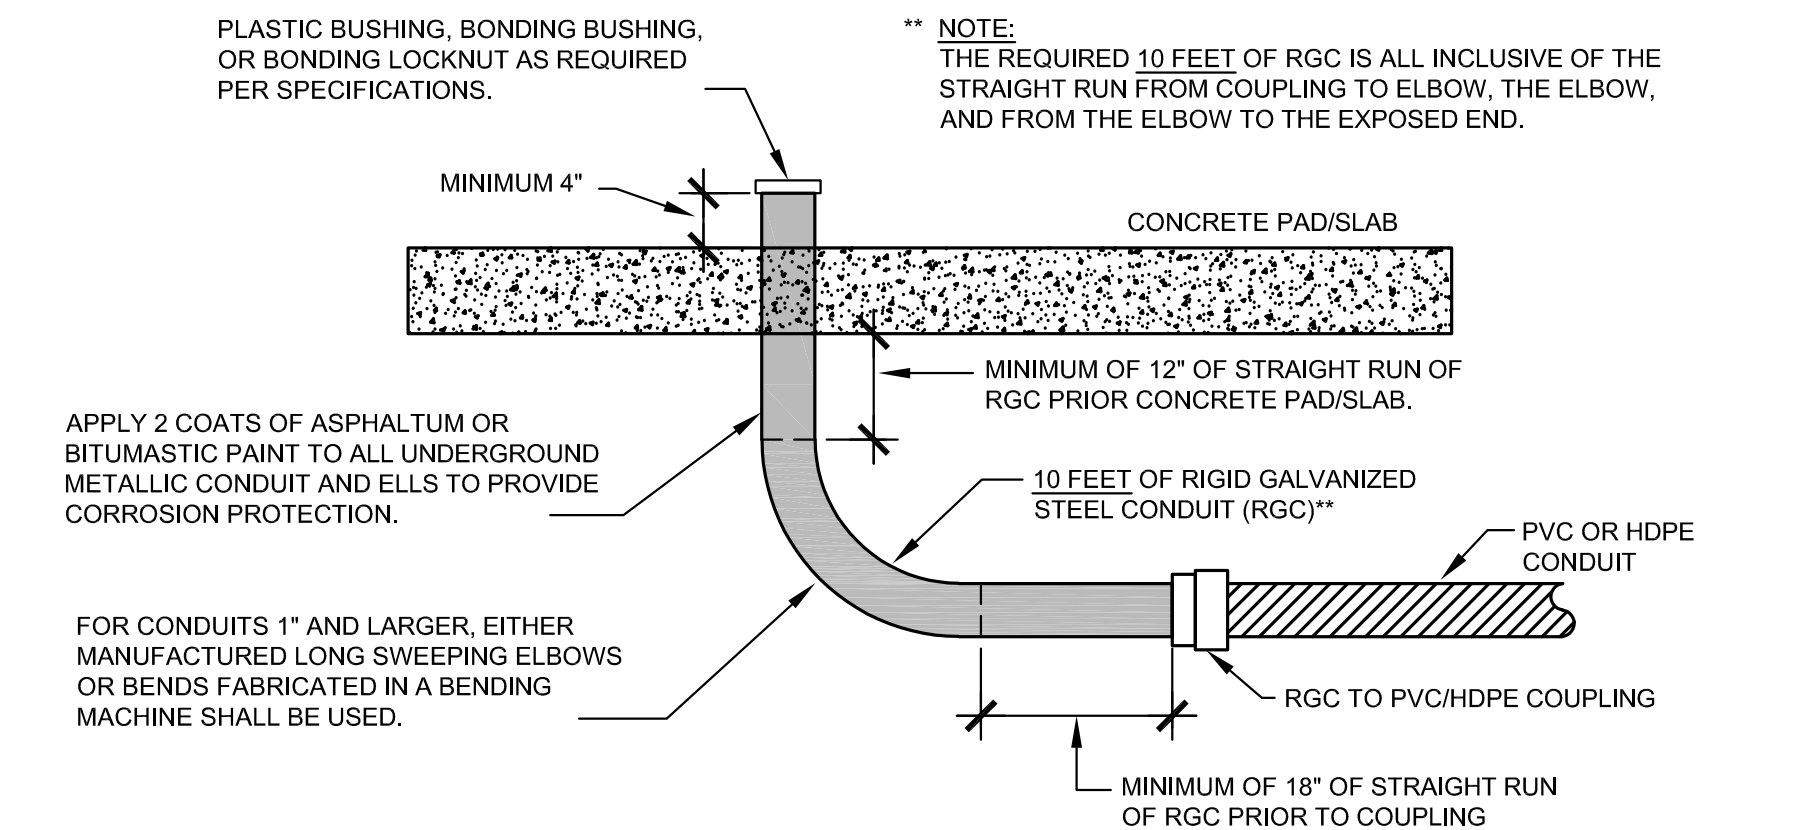

5
E5.1
N.T.S.



CONDUIT STUB-UP DETAIL

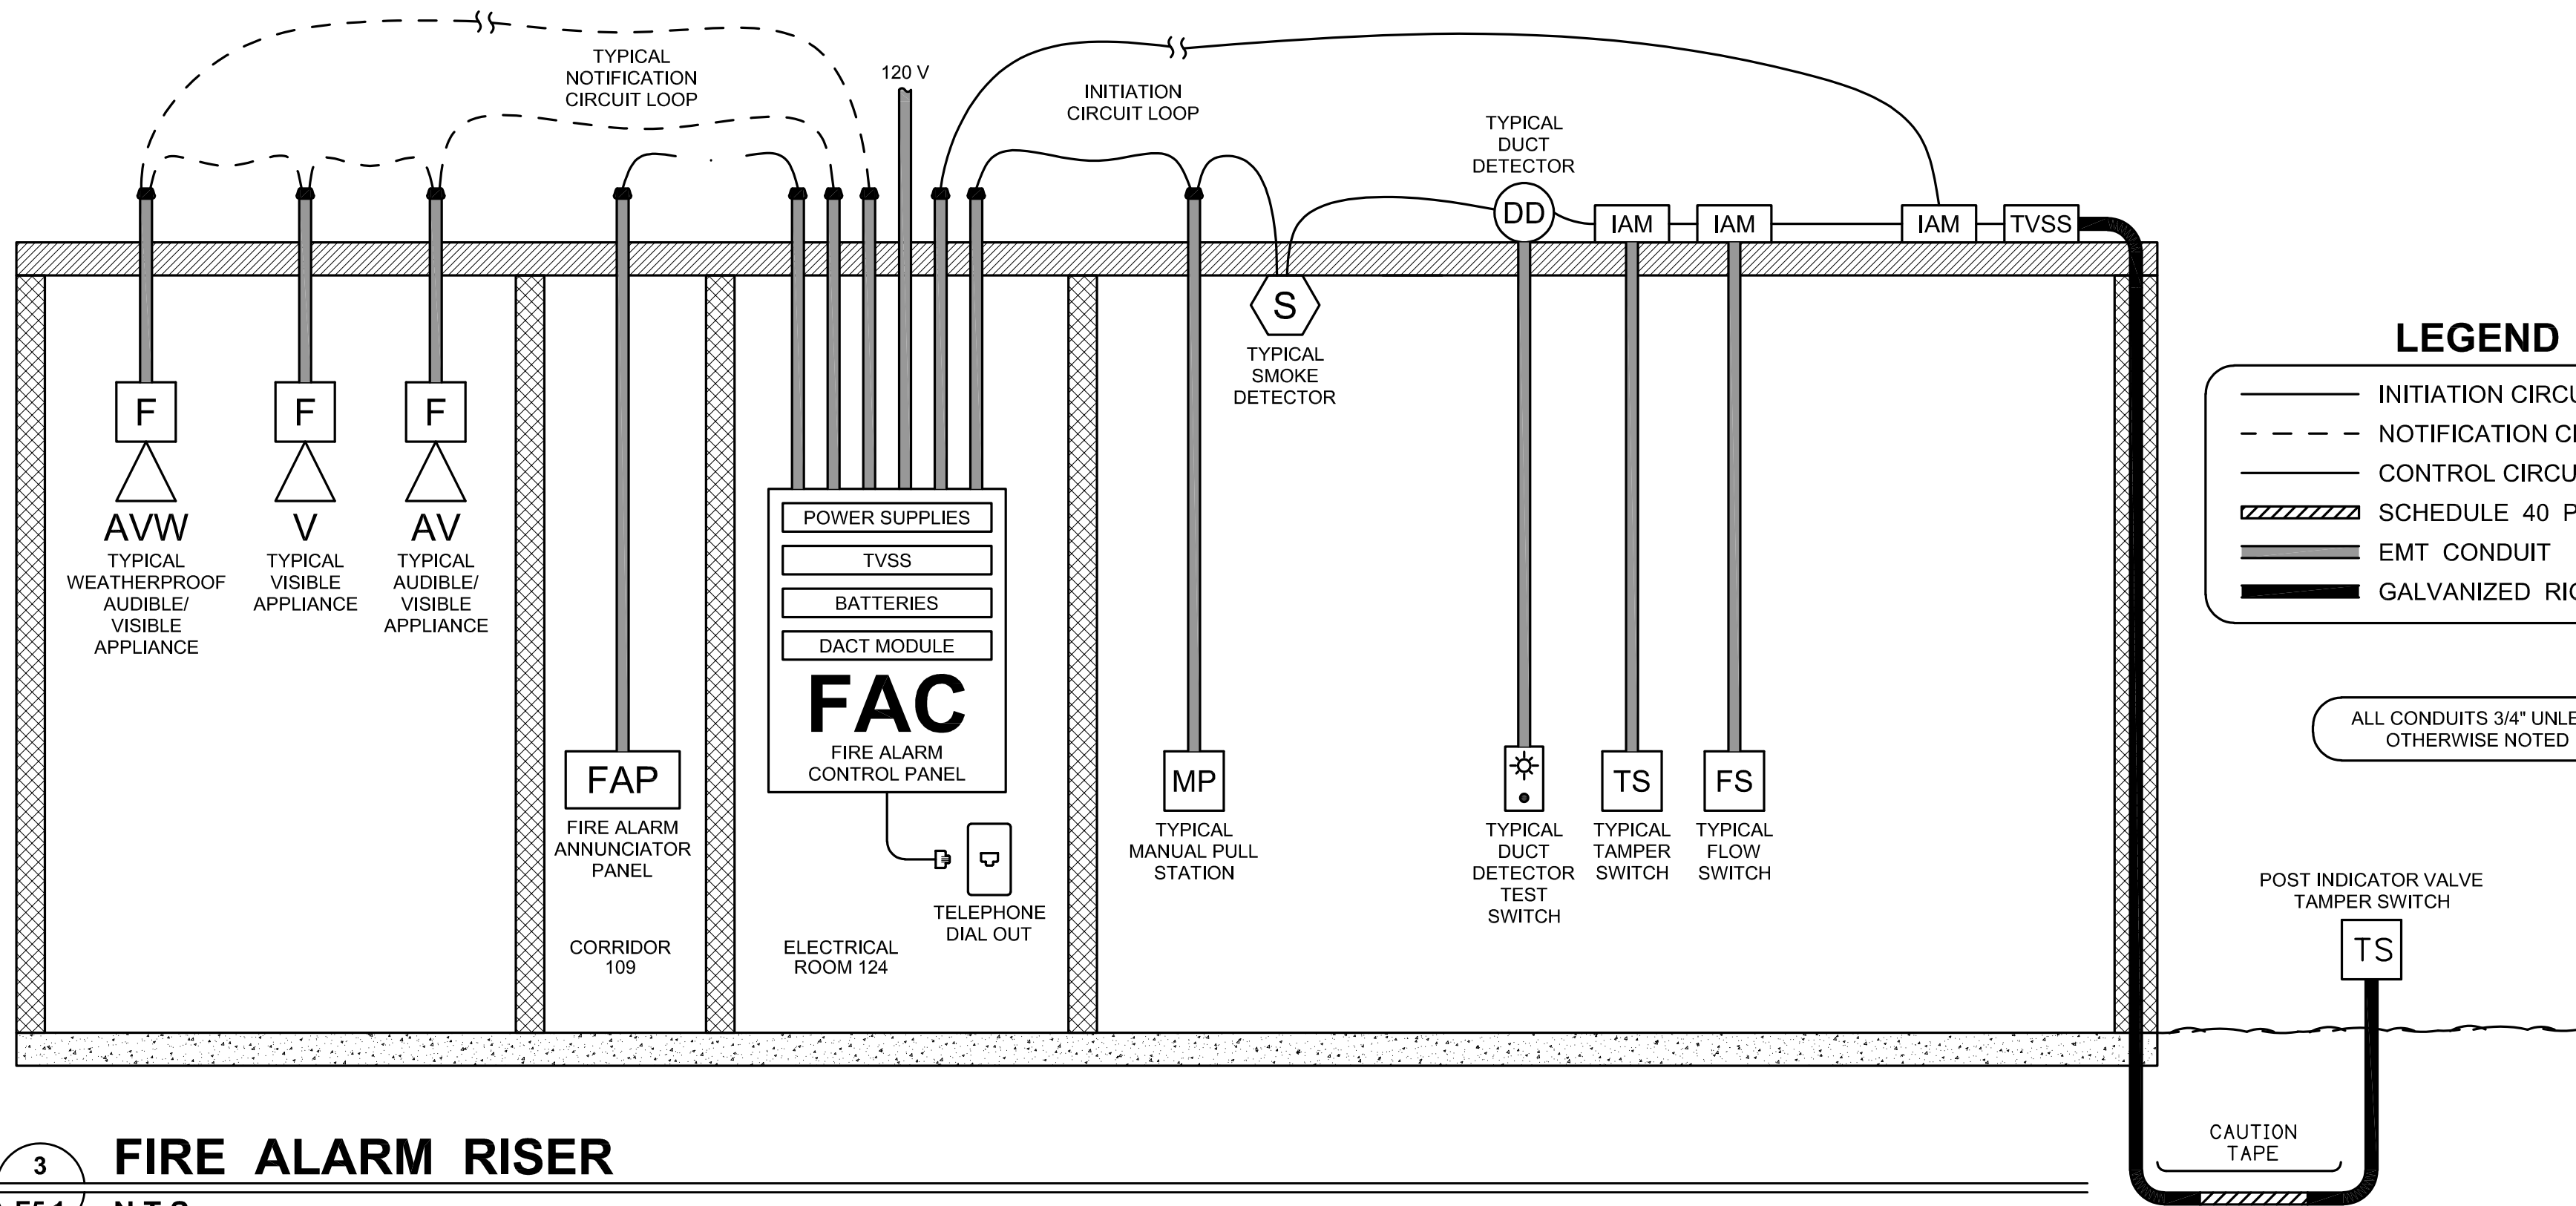

3
E5.1
N.T.S.


FIRE ALARM RISER

DETAIL IS FOR DIAGRAMATIC PURPOSES ONLY. ALL EQUIPMENT LOCATIONS SHALL BE VERIFIED WITH OWNER AND ARCHITECT PRIOR TO INSTALLATION. ANY DISCREPANCIES SHALL BE REPORTED TO THE ENGINEER.

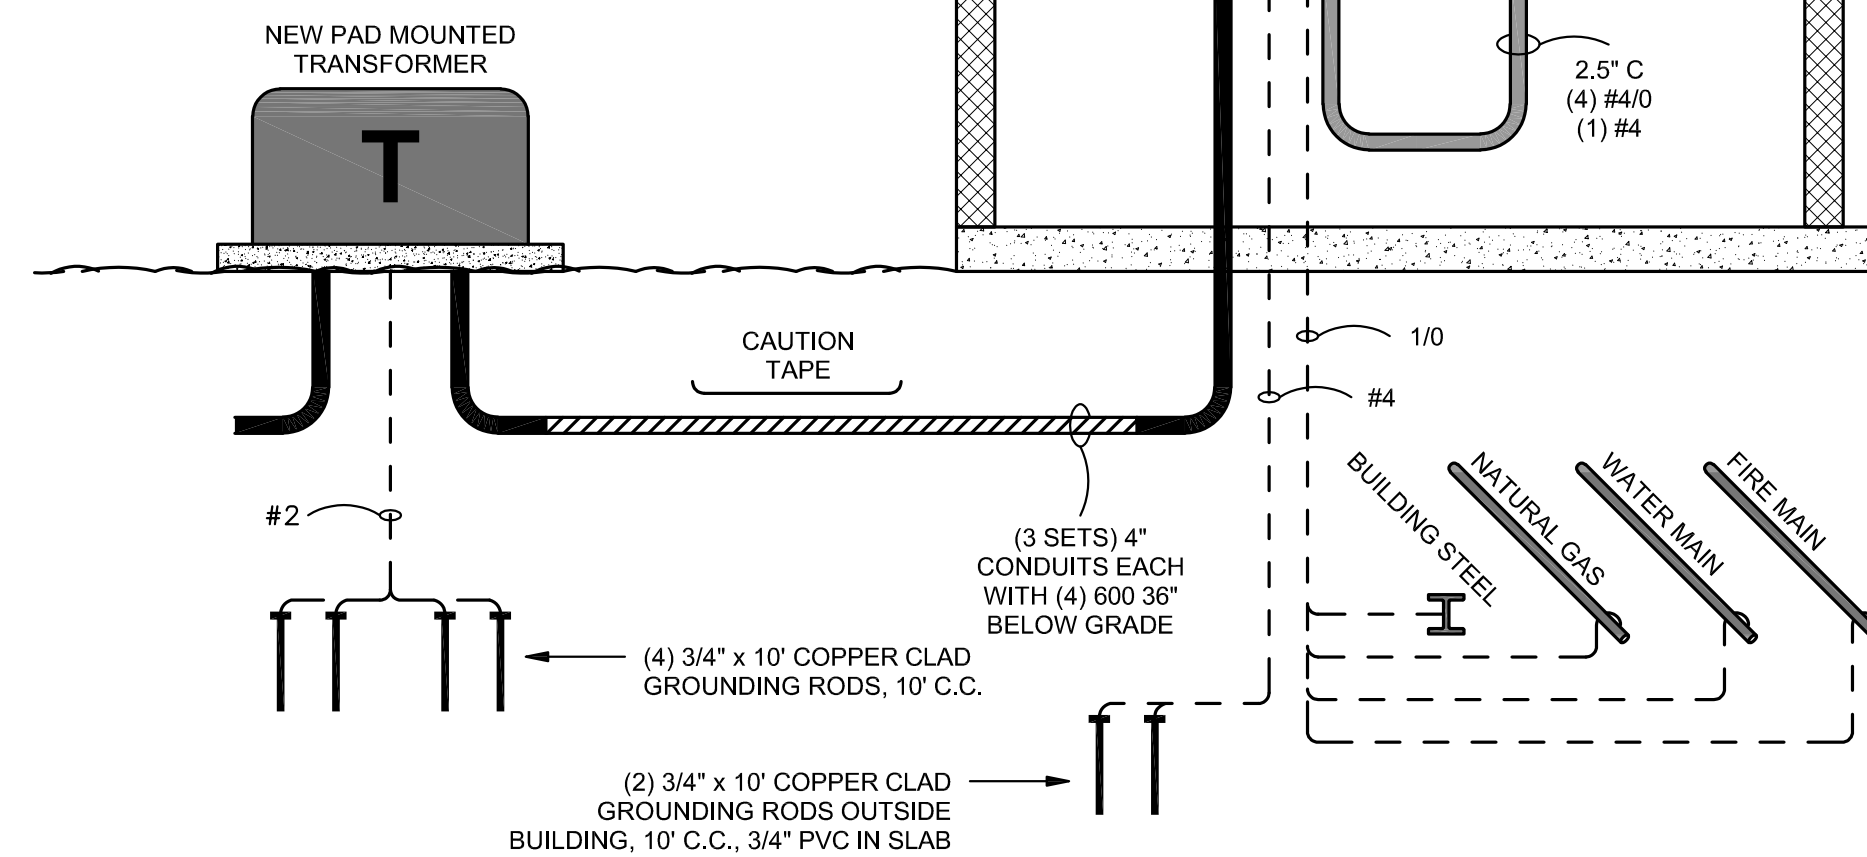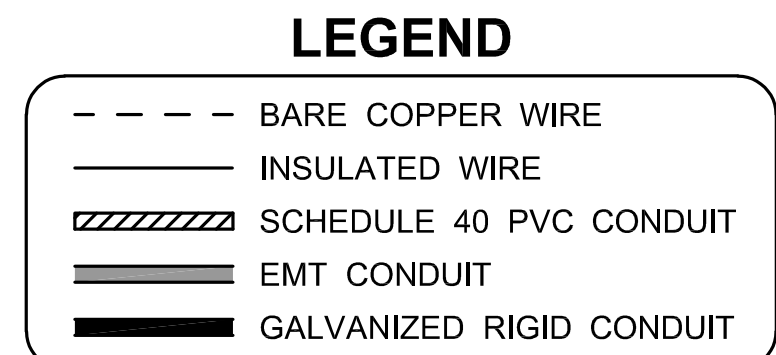


4
E5.1
N.T.S.

POWER RISER

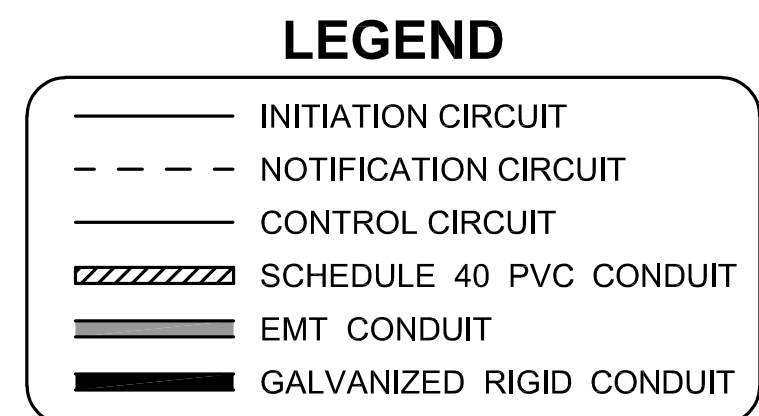

ALL CONDUITS 3/4" UNLESS OTHERWISE NOTED

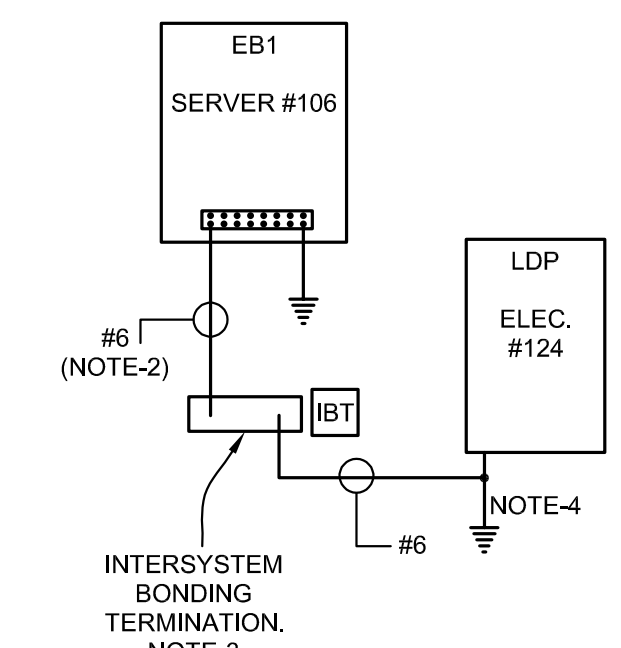

- NOTES:
1. PROVIDE AT EACH EQUIPMENT BACKBOARD A GROUNDING BAR WITH #6 GROUNDING CONDUCTOR THAT CONNECTS TO BUILDING STEEL.
 2. PROVIDE #6 BONDING CONDUCTOR BETWEEN EACH EQUIPMENT BACKBOARD AND THE INTERSYSTEM BONDING TERMINATION.
 3. PROVIDE AND INSTALL AN INTERSYSTEM BONDING TERMINATION WITH MINIMUM 5 TERMINALS FOR CONNECTING OTHER BUILDING SYSTEMS TO THE GROUNDING SYSTEM OF THE ELECTRICAL POWER SUPPLY. MOUNT AT SERVICE EQUIPMENT.
 4. PROVIDE #6 BONDING CONDUCTOR BETWEEN THE INTERSYSTEM BONDING TERMINATION AND THE SERVICE ENTRANCE GROUNDING CONDUCTOR.
 5. ALL BONDING AND GROUNDING CONDUCTORS SHALL BE STRANDED COPPER WITH GREEN THIN INSULATION, RUN WITHOUT CONDUIT ABOVE ACCESSIBLE CEILING AND SECURELY ATTACHED TO BUILDING. IT IS PERMITTED TO RUN ON OR THROUGH FRAMING MEMBERS.

2
E5.1
N.T.S.

TELECOMMUNICATIONS
GROUNDING DETAIL



Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2024	ADDENDUM No. 3



PROJECT NO.	2023111
DRAWN BY:	JWF
CHECKED BY:	CDR


Copyright © 2024
PryorMorrow PC

ELECTRICAL:
-DETAILS

E5.1

PANEL LDP		LOCATION: ELECTRICAL 111 SUPPLY FROM: UTILITY MOUNTING: SURFACE ENCLOSURE: NEMA 1 FEEDER: SEE RISER INCOMING FEED LOCATION: BOTTOM					VOLTS: 120/208 WYE PHASES: 3 WIRES: 4 SUBFEED: NO SPD: YES MANUFACTURER: SIEMENS					A.I.C. RATING: 28K MIN MAINS TYPE: MB MAINS RATING: 1200 A MCB RATING: 1200 A (FULLY RATED) SERVICE ENTRANCE: YES MODEL: P4						
		PANELBOARD NOTES:																
CKT	CIRCUIT DESCRIPTION	NOTES	FEEDER	TRIP	POLES	A (VA)		B (VA)		C (VA)		POLES	TRIP	FEEDER	NOTES	CIRCUIT DESCRIPTION	CKT	
1						11641	16644										2	
3	LA	—	SEE RISER	225 A	3				11924	16644			1	90 A	3#2, 1#8G., 1-1/4"C.	—	Air Compressor	4
5											11803	16644					6	
7						29435	—						1	20 A	—	—	Prepared Space	8
9	LB	—	SEE RISER	400 A	3				30605	—			1	20 A	—	—	Prepared Space	10
11											10580	—	1	20 A	—	—	Prepared Space	12
13						33645	—						1	20 A	—	—	Prepared Space	14
15	LC	—	SEE RISER	400 A	3				33092	—			1	20 A	—	—	Prepared Space	16
17											32668	—	1	20 A	—	—	Prepared Space	18
19						7488	—						1	20 A	—	—	Prepared Space	20
21	PU-1	—	3#1, 1#8G., 1-1/4"C.	100 A	3				7488	—			1	20 A	—	—	Prepared Space	22
23											7488	—	1	20 A	—	—	Prepared Space	24
25						5184	—						1	20 A	—	—	Prepared Space	26
27	PU-2	—	3#4, 1#8G., 1"C.	70 A	3				5184	—			1	20 A	—	—	Prepared Space	28
29											5184	—	1	20 A	—	—	Prepared Space	30
31						7488	—						1	20 A	—	—	Prepared Space	32
33	PU-3	—	3#1, 1#8G., 1-1/4"C.	100 A	3				7488	—			1	20 A	—	—	Prepared Space	34
35											7488	—	1	20 A	—	—	Prepared Space	36
37						7488	—											38
39	PU-4	—	3#1, 1#8G., 1-1/4"C.	100 A	3				7488	—			3	50 A	5#6	—	SPD	40
41											7488	—						42
TOTAL LOAD:						119013		119913		99343								
TOTAL LOAD (A):						991		999		827								
															TOTAL CONNECTED CURRENT: 939 A			
BREAKER NOTES:																		


PANEL 	
---	--

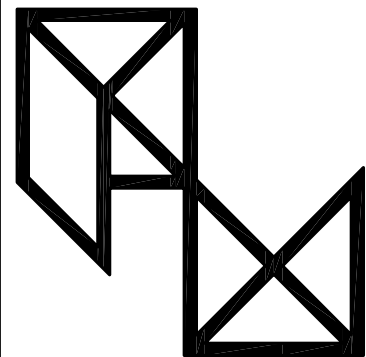

PryorMorrow

Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2024	ADDENDUM No. 3

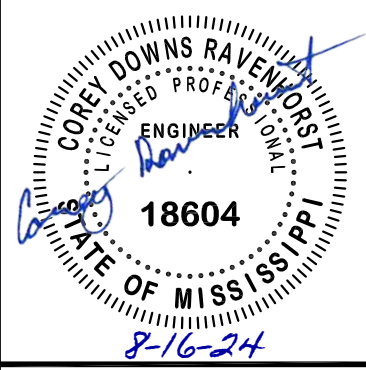


PROJECT NO.	2023111
DRAWN BY:	JWF
CHECKED BY:	CDR

Copyright © 2024
PryorMorrow PC

ELECTRICAL:
-PANEL SCHEDULES


E6.1

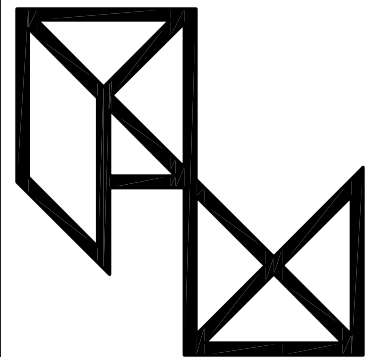

PryorMorrow

Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2024	ADDENDUM No. 3

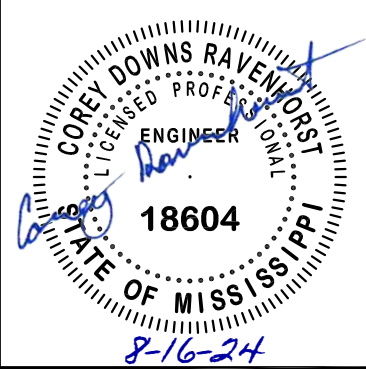

PROJECT NO.	2023111
DRAWN BY:	JWF
CHECKED BY:	CDR




Copyright © 2024
PryorMorrow PC




ELECTRICAL:
-PANEL SCHEDULES











E6.2


PANEL		LOCATION: ADV. MANU. LAB 128					VOLTS: 120/208 WYE					A.I.C. RATING: 16K MIN					
LB		SUPPLY FROM: LDP					PHASES: 3					MAINS TYPE: MB					
		MOUNTING: SURFACE					WIRES: 4					MAINS RATING: 400 A					
		ENCLOSURE: NEMA 1					SUBFEED: TWO SECTION PANEL					MCB RATING: 400 A					
		FEEDER: SEE RISER					SPD: NO					SERVICE ENTRANCE: NO					
		INCOMING FEED LOCATION: TOP					MANUFACTURER: SIEMENS					MODEL: P2					
		PANELBOARD NOTES:															
		Panel LB is a two section panel.															
CKT	CIRCUIT DESCRIPTION	NOTES	FEEDER	TRIP	POLES	A (VA)		B (VA)		C (VA)		POLES	TRIP	FEEDER	NOTES	CIRCUIT DESCRIPTION	CKT
1	Lighting	—	2#12, 1#12G, 3/4"C.	20 A	1	840	4100										2
3	Lighting	—	2#12, 1#12G, 3/4"C.	20 A	1			440	4100			3	50 A	3#6, 1#10G, 1"C.	—	Plasma Cutter	4
5	Lighting	—	2#12, 1#12G, 3/4"C.	20 A	1					1080	4100						6
7	Lighting	—	2#12, 1#12G, 3/4"C.	20 A	1	275	1800					1	20 A	2#12, 1#12G, 3/4"C.	—	Welding Booth Exhaust Fan	8
9	Exterior Lighting	—	2#12, 1#12G, 3/4"C.	20 A	1			345	1500			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	10
11	Welding Booth Receptacle	—	2#12, 1#12G, 3/4"C.	20 A	1					180	1500	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	12
13	Welder	—	2#6, 1#10G, 1"C.	50 A	2	4100	1500					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	14
15	Welder	—	2#6, 1#10G, 1"C.	50 A	2			4100	1500			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	16
17	Welding Booth Receptacle	—	2#12, 1#12G, 3/4"C.	20 A	1					180	1500	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	18
19	Welder	—	2#6, 1#10G, 1"C.	50 A	2	4100	720					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Tool Storage 120	20
21	Welder	—	2#6, 1#10G, 1"C.	50 A	2			4100	720			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	22
23	Welding Booth Receptacle	—	2#12, 1#12G, 3/4"C.	20 A	1					180	1500	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	24
25	Welder	—	2#6, 1#10G, 1"C.	50 A	2	4100	1500					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	26
27	Welder	—	2#6, 1#10G, 1"C.	50 A	2			4100	1500			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Adv. Manu. Shop	28
29	Welding Booth Receptacle	—	2#12, 1#12G, 3/4"C.	20 A	1					180	500	1	20 A	2#12, 1#12G, 3/4"C.	—	Welding Booth Lights	30
31	Welder	—	2#6, 1#10G, 1"C.	50 A	2	4100	2400					1	20 A	2#12, 1#12G, 3/4"C.	—	Plasma Cutter Exhaust Fan	32
33	Welder	—	2#6, 1#10G, 1"C.	50 A	2			4100	—			1	20 A	—	—	Prepared Space	34
35	Welding Booth Receptacle	—	2#12, 1#12G, 3/4"C.	20 A	1					180	—	1	20 A	—	—	Prepared Space	36
37	Welder	—	2#6, 1#10G, 1"C.	50 A	2	4100	—					1	20 A	—	—	Prepared Space	38
39	Welder	—	2#6, 1#10G, 1"C.	50 A	2			4100	—			1	20 A	—	—	Prepared Space	40
41	Prepared Space	—	—	20 A	1					—	—	1	20 A	—	—	Prepared Space	42
43	Prepared Space	—	—	20 A	1	—	—					1	20 A	—	—	Prepared Space	44
45	Prepared Space	—	—	20 A	1			—	—			1	20 A	—	—	Prepared Space	46
47	Prepared Space	—	—	20 A	1					—	—	1	20 A	—	—	Prepared Space	48
49	Prepared Space	—	—	20 A	1	—	—					1	20 A	—	—	Prepared Space	50
51	Prepared Space	—	—	20 A	1			—	—			1	20 A	—	—	Prepared Space	52
53	Prepared Space	—	—	20 A	1					—	—	1	20 A	—	—	Prepared Space	54
55	Prepared Space	—	—	20 A	1	—	—					1	20 A	—	—	Prepared Space	56
57	Prepared Space	—	—	20 A	1			—	—			1	20 A	—	—	Prepared Space	58
59	Prepared Space	—	—	20 A	1					—	—	1	20 A	—	—	Prepared Space	60
61	Prepared Space	—	—	20 A	1	—	—					1	20 A	—	—	Prepared Space	62
63	Prepared Space	—	—	20 A	1			—	—			1	20 A	—	—	Prepared Space	64
65	Prepared Space	—	—	20 A	1					—	—	1	20 A	—	—	Prepared Space	66
67	Prepared Space	—	—	20 A	1	—	—					1	20 A	—	—	Prepared Space	68
69	Prepared Space	—	—	20 A	1			—	—			1	20 A	—	—	Prepared Space	70
71	Prepared Space	—	—	20 A	1					—	—	1	20 A	—	—	Prepared Space	72
73	Prepared Space	—	—	20 A	1	—	—					1	20 A	—	—	Prepared Space	74
75	Prepared Space	—	—	20 A	1			—	—			1	20 A	—	—	Prepared Space	76
77	Prepared Space	—	—	20 A	1					—	—	1	20 A	—	—	Prepared Space	78
79	Prepared Space	—	—	20 A	1	—	—					1	20 A	—	—	Prepared Space	80
81	Prepared Space	—	—	20 A	1			—	—			1	20 A	—	—	Prepared Space	82
83	Prepared Space	—	—	20 A	1					—	—	1	20 A	—	—	Prepared Space	84
TOTAL LOAD:						33635		30605		10580							
TOTAL LOAD (A):						280.3		255		88.1							
TOTAL CONNECTED CURRENT: 196 A																	
BREAKER NOTES:																	

PANEL			LOCATION: CORRIDOR 109					VOLTS: 120/208 WYE					A.I.C. RATING: 12K MIN						
LC			SUPPLY FROM: LDP					PHASES: 3					MAINS TYPE: MB						
			MOUNTING: RECESSED					WIRES: 4					MAINS RATING: 400 A						
			ENCLOSURE: NEMA 1					SUBFEED: TWO SECTION PANEL					MCB RATING: 400 A						
			FEEDER: SEE RISER					SPD: NO					SERVICE ENTRANCE: NO						
			INCOMING FEED LOCATION: TOP					MANUFACTURER: SIEMENS					MODEL: P2						
TWO SECTION PANEL			PANELBOARD NOTES:																
Panel LC is a two section panel.																			
CKT	CIRCUIT DESCRIPTION	NOTES	FEEDER	TRIP	POLES	A (VA)		B (VA)		C (VA)		POLES	TRIP	FEEDER	NOTES	CIRCUIT DESCRIPTION	CKT		
1	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1	720	180					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	2		
3	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1			720	180			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	4		
5	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1					720	180	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	6		
7	Receptacle Storage 116	—	2#12, 1#12G, 3/4"C.	20 A	1	540	180					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	8		
9	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1			180	180			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	10		
11	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1					180	180	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	12		
13	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1	180	180					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	14		
15	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1			180	180			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	16		
17	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1					180	180	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	18		
19	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1	180	180					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	20		
21	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1			180	180			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	22		
23	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1					180	180	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	24		
25	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1	180	180					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	26		
27	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1			180	180			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	28		
29	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1					180	180	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	30		
31	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1	180	180					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	32		
33	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1			180	180			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	34		
35	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1					180	180	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	36		
37	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1	180	180					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	38		
39	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1			180	180			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	40		
41	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1					180	180	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	42		
43	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1	180	22657										44		
45	Receptacle Cosmetology Lab 115	—	2#12, 1#12G, 3/4"C.	20 A	1			180	22657			3	80 A	3#3, 1#8, 1-1/4"C.	1	Dryer Laundry 105	46		
47	Manicure Table	—	2#12, 1#12G, 3/4"C.	20 A	1					500	22657						48		
49	Manicure Table	—	2#12, 1#12G, 3/4"C.	20 A	1	500	720					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Office 119	50		
51	Manicure Table	—	2#12, 1#12G, 3/4"C.	20 A	1			500	720			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Office 120	52		
53	Manicure Table	—	2#12, 1#12G, 3/4"C.	20 A	1					500	540	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Student Services 118	54		
55	Receptacle Cosmetology Class 114	—	2#12, 1#12G, 3/4"C.	20 A	1	360	720					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Student Services 118	56		
57	Receptacle Cosmetology Class 114	—	2#12, 1#12G, 3/4"C.	20 A	1			720	540			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Student Services 118	58		
59	Receptacle Cosmetology Class 114	—	2#12, 1#12G, 3/4"C.	20 A	1					720	360	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Mens RR 112	60		
61	Receptacle Cosmetology Class 114	—	2#12, 1#12G, 3/4"C.	20 A	1	720	180					1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Cosmetology Lab 115	62		
63	Receptacle Cosmetology Class 114	—	2#12, 1#12G, 3/4"C.	20 A	1			720	—			1	20 A	—	—	Spare	64		
65	Receptacle Cosmetology Class 114	—	2#12, 1#12G, 3/4"C.	20 A	1					720	1171	1	20 A	2#12, 1#12G, 3/4"C.	—	Lighting	66		
67	Receptacle Corridor 109	—	2#12, 1#12G, 3/4"C.	20 A	1	720	1536					1	20 A	2#12, 1#12G, 3/4"C.	—	Lighting	68		
69	EDF Corridor 109	1	2#12, 1#12G, 3/4"C.	20 A	1			500	855			1	20 A	2#12, 1#12G, 3/4"C.	—	Lighting	70		
71	Receptacle Corridor 109	—	2#12, 1#12G, 3/4"C.	20 A	1					720	500	1	20 A	2#12, 1#12G, 3/4"C.	—	Exhaust Fan Manicure Table	72		
73	Receptacle Cosmetology Office 101	—	2#12, 1#12G, 3/4"C.	20 A	1	720	672					1	20 A	2#12, 1#12G, 3/4"C.	—	Lighting	74		
75	Receptacle Cosmetology Storage 102	—	2#12, 1#12G, 3/4"C.	20 A	1			720	720			1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Vestibule 108	76		
77	Water Heater Janitor 103	—	2#12, 1#12G, 3/4"C.	20 A	1					500	720	1	20 A	2#12, 1#12G, 3/4"C.	—	Receptacle Mens Locker 107	78		
79	Receptacle Laundry 105	—	2#12, 1#12G, 3/4"C.	20 A	1	540	—					1	20 A	—	—	Spare	80		
81	Washer Laundry 105	1	2#12, 1#12G, 3/4"C.	20 A	1			1200	—			1	20 A	—	—	Spare	82		
83	HWRP	—	2#12, 1#12G, 3/4"C.	20 A	1					180	—	1	20 A	—	—	Spare	84		
TOTAL LOAD:						33645		33092		32668									
TOTAL LOAD (A):						280		275		272									
TOTAL CONNECTED CURRENT: 276 A																			
BREAKER NOTES: 1. Breaker to be GFCI type.																			

FIRE ALARM LEGEND				
SYMBOL	MANU.	CATALOG#	DESCRIPTION	COMMENTS
	SIMPLEX	4010e SERIES	FIRE ALARM CONTROL PANEL, 1000 ADDRESSABLE POINTS, 20 HARD-WIRED CIRCUITS FOR INITIATION, NOTIFICATION, OR AUXILIARY CONTROL, COMMON EVENT REPORTING TO MONITORING STATION, BATTERY BACKUP, TRANSIENT VOLTAGE SURGE SUPPRESSION MODULE, ENTIRE FIRE ALARM SYSTEM SHALL BE A FULLY FUNCTIONAL VOICE EVACUATION SYSTEM.	SURFACE MOUNT
	SIMPLEX	4606-9101 ANNUNCIATOR, 4100-1244 MIC	FIRE ALARM ANNUNCIATOR PANEL FOR 4001E SERIES, SUPERVISED, FULL SYSTEM CONTROL (SYSTEM RESET, ALARM SILENCE, AND ACKNOWLEDGMENT OF ALARM, SUPERVISORY, AND TROUBLE SIGNALS), FLUSH MOUNT, PROVIDE WITH REMOTE MICROPHONE, ANNUNCIATOR AND MIC SHALL BE MOUNTED IN A SINGLE, LOCKABLE, SEMI-FLUSH ENCLOSURE WITH VIEW WINDOW.	MOUNT 48" AFF TO CENTER UNLESS OTHERWISE NOTED
	SIMPLEX	4099-9003	MANUAL PULL STATION, ADDRESSABLE, DIGITAL TRANSMISSION, TWO-WIRE COMMUNICATION, INTEGRAL INDIVIDUAL ADDRESSABLE MODULE (IAM), DOUBLE ACTION PUSH/PULL, RED HOUSING, WHITE LETTERS, KEYED RESET, SEMI-FLUSH WALL MOUNTING, UL LISTED.	MOUNT 48" AFF TO CENTER UNLESS OTHERWISE NOTED
	SIMPLEX	4098-9757 SENSOR , 4098-9788 BASE	SMOKE DETECTOR, ANALOG SENSING, PHOTOELECTRIC, ADDRESSABLE, DIGITAL TRANSMISSION, TWO-WIRE COMMUNICATION, 3 LEVELS OF SENSITIVITY (2.5%, 3.0%, OR 3.7%), AUTOMATIC ENVIRONMENTAL COMPENSATION, AUTOMATIC CALIBRATION CHECK, INTEGRAL RED LED, UL LISTED.	CEILING MOUNT 24" FROM ANY HVAC GRILL
	SIMPLEX	FD00TC411 SENSOR, 4098-9788 BASE	MULTI-CRITERIA FIRE/CO DETECTOR, REDUNDANT OPTICAL AND THERMAL SENSORS, UL LISTED.	CEILING MOUNT 24" FROM ANY HVAC GRILL
	SIMPLEX	4098-9733 SENSOR , 4098-9792 BASE	HEAT DETECTOR, ANALOG SENSING, ADDRESSABLE, DIGITAL TRANSMISSION, TWO-WIRE COMMUNICATION, SELF-RESTORING, AUTOMATIC ENVIRONMENTAL COMPENSATION, AUTOMATIC CALIBRATION CHECK, INTEGRAL RED LED, PROVIDES RATE-OF-RISE SENSING FOR 15 OR 20 DEGREES FARENHEIT PER MINUTE, ALSO PROVIDES FIXED TEMPERATURE SENSING OF 135 OR 155 DEGREES FARENHEIT, UL LISTED.	SET FOR FIXED TEMPERATURE SENSING OF 135 DEGREES
	SIMPLEX	4904-9333	VISIBLE NOTIFICATION APPLIANCE, NON-ADDRESSABLE, 4-WIRE OPERATION, SUPERVISED, 24 VDC, XENON STROBE LIGHT, 110 CANDELA, SYNCHRONIZED, 1 HZ, WALL MOUNTED, SEMI-FLUSH MOUNT, RED COVER, WHITE LETTERING, UL LISTED.	MOUNT 90" AFF TO CENTER UNLESS OTHERWISE NOTED
	SIMPLEX	4906-9151 WITH 4905-9998	SPEAKER/STROBE NOTIFICATION APPLIANCE, NON-ADDRESSABLE, 4-WIRE OPERATION, SUPERVISED, 24 VDC, SPEAKER, XENON STROBE LIGHT, 110 CANDELA, SYNCHRONIZED, 1 HZ, WALL MOUNTED, SEMI-FLUSH MOUNT, RED COVER, WHITE LETTERING, UL LISTED.	MOUNT 90" AFF TO CENTER UNLESS OTHERWISE NOTED
	SIMPLEX	4906-9151 WITH 4905-9998	SPEAKER/STROBE WEATHERPROOF NOTIFICATION APPLIANCE, NON-ADDRESSABLE, 4-WIRE OPERATION, SUPERVISED, 24 VDC, SPEAKER, XENON STROBE LIGHT, 110 CANDELA, SYNCHRONIZED, 1 HZ, WALL MOUNTED, SEMI-FLUSH MOUNT, RED COVER, WHITE LETTERING, UL LISTED.	MOUNT 90" AFF TO CENTER UNLESS OTHERWISE NOTED

CIRCUIT DEVICES LEGEND				
DEVICES				
SYMBOL	MANU.	CATALOG#	DESCRIPTION	COMMENTS
	HUBBELL	HBL5362GY	DUPLEX RECEPTACLE, COMMERCIAL SPECIFICATION GRADE, SIDE WIRED, GRAY BODY AND STAINLESS COVER PLATE, 20 AMP, 120 VOLT, NEMA 5-20R, UL LISTED.	MOUNT 18" AFF TO CENTER UNLESS OTHERWISE NOTED
	SENSORSWITCH	CMR PDT 9	LINE VOLTAGE OCCUPANCY SENSOR, DUAL TECHNOLOGY.	CEILING MOUNT ABOVE MANICURE STATIONS
	HUBBELL	(2) HBL5362GY	TWO-GANG DUPLEX RECEPTACLE, COMMERCIAL SPECIFICATION GRADE, SIDE WIRED, GRAY BODY AND STAINLESS COVER PLATE, 20 AMP, 120 VOLT, NEMA 5-20R, UL LISTED.	MOUNT 18" AFF TO CENTER UNLESS OTHERWISE NOTED
	HUBBELL	GF20GY	GFCI DUPLEX RECEPTACLE, SPECIFICATION GRADE, HEAVY DUTY, SIDE WIRED, GRAY BODY, STAINLESS WALL PLATE, 20 AMP, 120 VOLT, NEMA 5-20R, UL LISTED.	MOUNT 18" AFF TO CENTER UNLESS OTHERWISE NOTED
	HUBBELL	FB2527 SA5016	SINGLE GANG ROUND FLOOR BOX WITH ALUMINUM COVER, PROVIDE DUPLEX, COMMERCIAL SPECIFICATION GRADE, SIDE WIRED, GRAY BODY, 20 AMP, 120 VOLT, NEMA 5-20R, UL LISTED RECEPTACLE INSIDE FOR CONNECTION TO MANICURE TABLES.	RECESSED IN FLOOR
	SAFETY TECHNOLOGY INTERNATIONAL	SS-2229ZAEN	EMERGENCY OFF BUTTON, WITH TWO FROM 10" CONTACTS RATED AT 10 AMPS@120VAC, SHIELD, YELLOW FINISH, PUSH TO ACTIVATE AND TURN TO RESET, CUSTOM TEXT "EMERGENCY POWER OFF".	MOUNT 48" AFF TO CENTER
DEVICE MODIFIERS 				
FOR ELECTRICAL FIXTURES WITH MODIFIERS: C - COUNTERTOP LOCATION, MOUNT RECEPTACLE 7" TO CENTER OF FACEPLATE FROM COUNTERTOP. COORDINATE LOCATION AND BACK SPLASH REQUIREMENTS WITH MILLWORK DETAILS. G - GROMMET REQUIRED, MOUNT STANDARD HEIGHT AND PROVIDE GROMMET IN MILLWORK AS REQUIRED. 48" - HEIGHT ABOVE FINISH FLOOR. WP - WEATHER-PROOF, PROVIDE INTERMATIC WP1100C IN-USE COVER. SB - RECEPTACLE FOR SMART BOARD. COORDINATE LOCATION AND HEIGHT AFF WITH OWNER PRIOR TO ROUGH-IN.				


LIGHTING SCHEDULE					
CONTROLS					
SYMBOL	MANU.	CATALOG#	DESCRIPTION	COMMENTS	COLOR
	SENSORSWITCH	SPODMRA JOT DX WH SSW 1GNG WH	LINE POWERED WALL SWITCH, ON/OFF-RAISE/LOWER, SINGLE USE OR MULTI LOCATION, SEALED SCREWLESS WALL PLATE, WIRELESS CONTROL TO FIXTURES, UL LISTED.	MOUNT 48" AFF	GRAY DEVICE, GRAY COVER
	SENSORSWITCH	WSXA JOT PDT DX SA WH SSW 1GNG WH	LINE POWERED WALL SWITCH, ON/OFF-RAISE/LOWER, PDT OCCUPANCY DETECTION, SINGLE USE OR MULTI LOCATION, SEALED SCREWLESS WALL PLATE, WIRELESS CONTROL TO FIXTURES, UL LISTED.	MOUNT 48" AFF	GRAY DEVICE, GRAY COVER
	SENSORSWITCH	WSXA PDT 2P FAN ASHRT WH SSW 1GNG OCC WH	2 POLE LINE POWERED WALL SWITCH, ON/OFF-FAN CONTROL, PDT OCCUPANCY DETECTION, MINIMUM FAN RUN TIME PER ASHRAE 62.2, SEALED SCREWLESS WALL PLATE, UL LISTED.	MOUNT 48" AFF	GRAY DEVICE, GRAY COVER
	nLIGHT	NPODMA WH SSW 1 GNG WH	LOW VOLTAGE WALL SWITCH, ON/OFF CONTROL, MULT-LOCATION, INTERFACING WITH nLIGHT CONTROL PANEL, SEALED SCREWLESS WALL PLATE, UL LISTED. PROVIDE LOW VOLTAGE CABLING AS REQUIRED.	MOUNT 48" AFF	GRAY DEVICE, GRAY COVER
	nLIGHT	NCM PDT 10 RJB 15M	LOW VOLTAGE OCCUPANCY SENSOR, INTERFACING WITH nLIGHT CONTROL PANEL, MOUNT FOR OPTIMAL COVERAGE OF SPACE, UL LISTED. PROVIDE LOW VOLTAGE CABLING AS REQUIRED.	CEILING MOUNT PER MANU. SPECS FOR BEST COVERAGE	WHITE DEVICE
	nLIGHT	ARP INTENC08NLT 8FCR MVOLT SC FM DTC ARPA PC	nLIGHT CONTROL PANEL, 8 RELAY ENCLOSURE, 8 FIELD CONFIGURABLE RELAYS, SCREW COVER, FLUSH MOUNT. INCLUDE DIGITAL TIME CLOCK AND PHOTOCCELL. SEE CONTROL PANEL DETAIL FOR MORE INFORMATION.	FLUSH MOUNT IN WALL	WHITE DEVICE
NOTES FOR FIXTURES AND CONTROLS: 1. The contractor shall be responsible for coordinating with reflected ceiling plans and providing all the necessary frames and related items as required for the mounting of the light fixtures per the plans. Include all cost associated with this in the cost of this project. No change order will be processed for fixture modifications. 2. Provide fixture whips with all necessary conductors for fixture power and 0-10v dimming if required. 3. All battery packs to be powered by an unswitched conductor. 4. Upon loss of power, all fixtures with emergency battery shall illuminate to 100% output regardless of occupancy or control input.					
FIXTURES					
SYMBOL	MANU.	CATALOG#	DESCRIPTION	COMMENTS	VA CCT
	LITHONIA	2BLT2 48L ADSM E21 LP840 JOTVTX15	2X2 RECESSED ARCHITECTURAL TROFFER, STANDALONE WIRELESS ROOM CONTROLS WITH INTEGRAL OCCUPANCY SENSOR, UL LISTED.	5,087 LUMEN LED	42.9 4,000K
	LITHONIA	2BLT2 48L ADSM E21 LP840 JOTVTX15 E10WLCP	2X2 RECESSED ARCHITECTURAL TROFFER, STANDALONE WIRELESS ROOM CONTROLS WITH INTEGRAL OCCUPANCY SENSOR, UL LISTED. INTEGRAL 10W EMERGENCY BATTERY.	5,087 LUMEN LED	42.9 4,000K
	LITHONIA	2BLT4 30L ADSM E21 LP840	2X4 RECESSED ARCHITECTURAL TROFFER, UL LISTED.	3,200 LUMEN LED	22.5 4,000K
	LITHONIA	2BLT4 30L ADSM E21 LP840 E10WLCP	2X4 RECESSED ARCHITECTURAL TROFFER, UL LISTED. INTEGRAL 10W EMERGENCY BATTERY.	3,200 LUMEN LED	22.5 4,000K
	LITHONIA	2BLT2 40L ADSM E21 LP840 JOTVTX15	2X2 RECESSED ARCHITECTURAL TROFFER, STANDALONE WIRELESS ROOM CONTROLS WITH INTEGRAL OCCUPANCY SENSOR, UL LISTED.	4,036 LUMEN LED	31 4,000K
	LITHONIA	2BLT2 40L ADSM E21 LP840 JOTVTX15 E10WLCP	2X2 RECESSED ARCHITECTURAL TROFFER, STANDALONE WIRELESS ROOM CONTROLS WITH INTEGRAL OCCUPANCY SENSOR, UL LISTED. INTEGRAL 10W EMERGENCY BATTERY.	4,036 LUMEN LED	31 4,000K
	LITHONIA	2BLT4 48L ADSM E21 LP840 JOTVTX15	2X4 RECESSED ARCHITECTURAL TROFFER, STANDALONE WIRELESS ROOM CONTROLS WITH INTEGRAL OCCUPANCY SENSOR, UL LISTED.	5,052 LUMEN LED	39.3 4,000K
	LITHONIA	2BLT4 48L ADSM E21 LP840 JOTVTX15 E10WLCP	2X4 RECESSED ARCHITECTURAL TROFFER, STANDALONE WIRELESS ROOM CONTROLS WITH INTEGRAL OCCUPANCY SENSOR, UL LISTED. INTEGRAL 10W EMERGENCY BATTERY.	5,052 LUMEN LED	39.3 4,000K
	LITHONIA	LDN4 40/07 L04 AR LD TRW MVOLT GZ10 JOT	4" RECESSED DOWNLIGHT, CLEAR TRIM, MATTE DIFFUSE TRIM FINISH, WHITE PAINTED FLANGE, STANDALONE WIRELESS ROOM CONTROLS, UL LISTED.	751 LUMEN LED	8.6 4,000K
	LITHONIA	2BLT2 30L ADSM E21 LP840	2X2 RECESSED ARCHITECTURAL TROFFER, UL LISTED.	3,064 LUMEN LED	36 4,000K
	FLUXWERX	LS1 R D D 40 S XX' S F1 M 12	5-1/2" WIDE SUSPENDED LINEAR, BATWING DISTRIBUTION, 20% UP/80% DOWN, ROUNDED CORNERS, METALLIC SILVER FINISH, UL LISTED. SUSPEND FIXTURE 12" AFF.	1,206/FT LUMEN LED	10/FT 4,000K
	LITHONIA	BLWP4 48L ADSM E21 LP840 JOTVTX15	4" STRIP/WRAP, STANDALONE WIRELESS ROOM CONTROLS WITH INTEGRAL OCCUPANCY SENSOR, UL LISTED. COORDINATE MOUNTING REQUIREMENTS WITH RCP. IF NO CEILING IS INDICATED, SUSPEND FIXTURE 10" AFF. PROVIDE CHAIN HANGERS AS REQUIRED.	5,205 LUMEN LED	40 4,000K
	LITHONIA	BLWP4 48L ADSM E21 LP840 JOTVTX15 E10WLCP	4" STRIP/WRAP, STANDALONE WIRELESS ROOM CONTROLS WITH INTEGRAL OCCUPANCY SENSOR, UL LISTED. COORDINATE MOUNTING REQUIREMENTS WITH RCP. IF NO CEILING IS INDICATED, SUSPEND FIXTURE 10" AFF. PROVIDE CHAIN HANGERS AS REQUIRED. INTEGRAL 10W EMERGENCY BATTERY.	5,205 LUMEN LED	40 4,000K
	LITHONIA	BLWP4 48L ADSM E21 LP840 E10WLCP	4" STRIP/WRAP, INTEGRAL 10W EMERGENCY BATTERY.	5,205 LUMEN LED	40 4,000K
	ISOLITE	UEL EM R 1C2M MTEBR	ARCHITECTURAL EDGELIT CLEAR EXIT SIGN, RED LETTERS, UNIVERSAL MOUNT HOUSING (CEILING, WALL, AND END), INTEGRAL NI-CAD BATTERY. SHADING INDICATES NUMBER OF FACES, FIELD CONFIGURABLE CHEVRONS AS INDICATED ON PLANS. ANY LOCATION SHOWN BY A DOOR, FIXTURE TO BE MOUNTED ON WALL CENTERED ABOVE DOOR. COORDINATE MOUNTING HEIGHT WITH DOOR TYPES PRIOR TO ROUGH-IN. ALL OTHER LOCATIONS TO BE MOUNTED FROM CEILING.	NA	NA NA
	LITHONIA	ELM6L UVOLT LTP SDRT	EMERGENCY TWO HEAD LIGHT, 1100LM, WHITE, UL LISTED.	MOUNT TO STRUCTURE, AIM HEADS FOR OPTIMAL EMERGENCY COVERAGE.	NA NA
	LITHONIA	WDGE1 P2 40K 80CRI VF MVOLT DBDX	ARCHITECTURAL WALL PACK, LOW PROFILE, FORWARD THROW OPTICS, DARK BRONZE COLOR.	MOUNT 9" AFF TO BOTTOM OF FIXTURE	15 4,000K
	LITHONIA	WDGE1 P2 40K 80CRI VF MVOLT DBDX E4WH	ARCHITECTURAL WALL PACK, LOW PROFILE, FORWARD THROW OPTICS, DARK BRONZE COLOR. INTEGRAL 4W EMERGENCY BATTERY.	MOUNT 9" AFF TO BOTTOM OF FIXTURE	15 4,000K

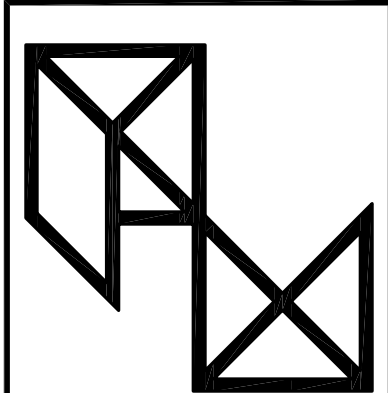

PryorMorrow

Addition at Career and Technical Center
Itawamba County School District
Itawamba County
(Fulton, Mississippi)

MARK	DATE	DESCRIPTION
SD	MARCH 28, 2024	SCHEMATIC DESIGN
DD	MAY 31, 2024	DESIGN DEVELOPMENT
CD	JUNE 28, 2024	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2024	ADDENDUM No. 3

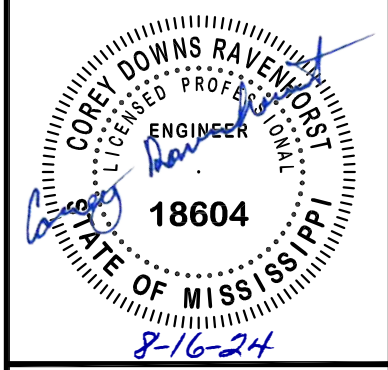

PROJECT NO.	2023111
DRAWN BY:	JWF
CHECKED BY:	CDR

Copyright © 2024
PryorMorrow PC

ELECTRICAL:
-LEGENDS

E7.1